SERVICE MANUAL

RX1 CHASSIS

MODEL	COMMANDER	DEST.	CHASSIS NO.
KP-W41MH11	RM-890	ME	SCC-J64A-A
KP-W41MH11	RM-890	HK	SCC-J63A-A
KP-W41MN11	RM-890	GE	SCC-J65A-A
KP-W41SN11	RM-890	AUS	SCC-J87A-A

MODEL	COMMANDER	DEST.	CHASSIS NO.

RM-890

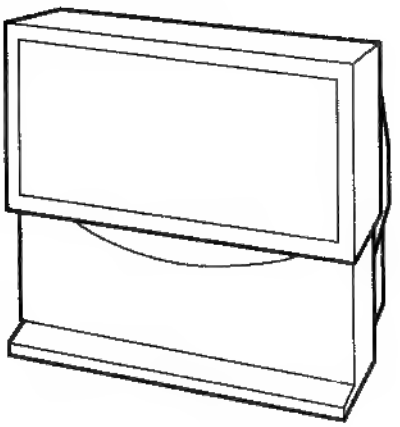

KP-W41MH11

COLOR REAR VIDEO PROJECTOR

SONY®

MICROFILM

※ Please file according to model size. ..... ■

SPECIFICATIONS

Projection system
3 picture tubes, 3 lenses, horizontal in-line system
Picture tube 7 inch high-brightness monochrome tubes (6.3 raster size), with optical coupling and liquidcooling system
Projection lenses High performance, large-diameter hybrid lens F1.0
Screen size 41 inches
Television system
B/G, I, D/K, M
Color system PAL, PAL 60, SECAM, NTSC4.43, NTSC3.58
Channel coverage
See "Channel coverage" at the bottom
Antenna 75 ohm external antenna terminal
Audio output (Speaker)
15 W × 2
Number of terminals
Video Input: 4, Output: 1
Audio Input: 4, Output: 1

S1 Video/S Video
Input: 4, Output: 1
Y: 1 Vp-p, 75 ohms, unbalanced, sync negative,
C: 0.286 Vp-p, 75 ohms
Power requirement
110 – 120/220 – 240 V AC, 50/60 Hz
Power consumption
280 W
Dimensions (w/h/d)
1020 × 1115 × 390 mm
Mass Approx. 58 kg
Supplied accessories
Remote commander (1)
Size R6 (AA) battery (1)
Bracket (2)
Screw (2)
Optional accessory
AV rack SU-W41

Design and specifications are subject to change without notice.

Channel coverage

M E/ASIA/CATV W EURO

Receivable channel	Channel display
E-2 to E-12	C02 to C12
E-21 to E-69	C21 to C69
S-01 to S-03	S42 to S44
S-1 to S-41	S01 to S41
Indonesia	
1A	C01
2 to 11	C03 to C12
Morocco	
M-4 to M-7	C70 to C73
M-8 to M-10	C08 to C10
New Zealand	
1	C01
2 to 11	C03 to C12
27 to 62	C27 to C62

HK/UK

Receivable channel	Channel display
Hong Kong, United Kingdom	
B-21 to B-68	C21 to C68
Ireland	
A to J	C01 to C09
South Africa	
4 to 13	C04 to C13
21 to 68	C21 to C68

AUSTRALIA

Receivable channel	Channel display
Australia	
AS-0 to AS-12	C00 to C12
AS-5A, AS-9A	C13, C14
AS-28 to AS-69	C28 to C69
New Zealand	
1	C00
2 to 3	C01 to C02
4 to 7	C06 to C09
8	C14
9 to 11	C10 to C12

CHINA/E EURO

Receivable channel	Channel display
China	
C-1 to C-2	C01 to C02
C-3	C13
C-4	C03
C-5	C04
C-6	C14
C-7 to C-12	C06 to C11
C-13 to C-24	C21 to C32
C-25 to C-47	C38 to C60
C-48 to C-57	C61 to C70
Z-1 to Z-39	S01 to S39
Eastern Europe	
R-1 to R-12	C01 to C12
R-21 to R-60	C21 to C60

AMERICA/CATV AMERICA

Receivable channel	Channel display
2 to 79	C02 to C79
A-1	S99
A-2	S98
A-3	S97
A-4	S96
A-5	S95
A-6	S06
A-7	S05
A-8	S01
A to W	S14 to S36
AA to CCC	S37 to S65

JAPAN

Receivable channel	Channel display
J-1 to J-62	C01 to C62
C-13 to C-32	C80 to C99

TABLE OF CONTENTS

Section	Title	Page
1.	**GENERAL**	
	Installing the Projection TV	4
	Stabilizing the Projection TV	4
	Changing the Menu Language	4
	Adjusting the Convergence (CONVERGENCE)	5
	Presetting Channels	5
	Introducing the Menu	6
	Watching the TV	6
	Watching the Picture in wide mode	7
	Watching Two Programs at One Time-TWIN PICTURE and PIP	8
	Selecting the Picture Mode	9
	Selecting the Sound Mode	10
	Selecting a Stereo or Bilingual Program	10
	Viewing Teletext	11
	Using Headphones	12
	Customizing the Projection TV	12
	Setting the Remote Command Mode	13
	Connections	14
	Channel Allocation	14
2.	**DISASSEMBLY**	
	2-1. Rear Cover Removal	15
	2-2. Chassis Assy Removal	15
	2-3. Service Position	15
	2-4. G Board Removal	15
	2-5. U Board Removal	16
	2-6. B Board Removal	16
	2-7. HA and HB Boards Removal	16
	2-8. Beznet Assy Removal	16
	2-9. Mirrer Cover Assy Removal	17
	2-10.High-Voltage Cable Installation	17
	2-11.Picture Tube Removal	17
3.	**SET-UP ADJUSTMENTS**	
	Screen Voltage Adjustment	18
	Focus Lens Adjustment	18
	Focus VR Adjustment	19
	Deflection Yoke Tolt Adjustment	19
	2-Pole Magnet Adjustment	20
	4-Pole Magnet Adjustment	20
	Defocus Adjustment	21
	Electrical Adjustment By Remote Commander	22
	1. Method of Setting the Service Adjustment Mode	22
	2. Memory Write Confirmation Method	22
	3. Adjust BUttons and Indicator	23
	4. An Iten of Adjustments	23
	Convergence Adjustment	26
	Convergence Main Adjustment	27
	Green Registration Adjustment	27
	Convergence Sub Adjustment	29
	Grreen Sub Adjustment	30
	Screen Center Section Green Vertical Line Adjustment	30
	Screen Center Section Green Horizontal Line Adjustment	31
	Green Size and Linearity Adjustment	31
	Green Horizontal Size Adjustment	32
	Green Vertical Linearity Adjustment	32
	Green Vertical Size Adjustment	33
	Green Horizontal Distortion Adjustment	33
	Green Horizontal Quaternary Adjustment	34
	Green Horizontal Asymmerical Pin Distortion Adjustment	34
	Green Horizontal Symmetrical Pin Distortion Adjustment	35
	Green Vertical Wave (Tertiary Distortion) Adjustment	35
	Green Vertical Quaternary Distortion Adjustment	36
	Green Vertical Trapezoidal Distortion Adjustment	36
	Green Vertical Asymmetrical Pin Distortion (Secondary Distortion) Adjustment	37
	Green Vertical Asymmetrical Pin Distortion Adjustment	37
	Green and Red Registration Adjustment	38
	Green and Blue Registration Adjustment	38
	White Balance Adjustment	39
4.	**CIRCUIT ADJUSTMENTS**	
	B Board Adjustment	40
	Color Adjustment	40
	Sub Brightness Adjustment	40
	Hwe Adjustment	40
	P in P Position Adjustment	41
	Text Position Adjustment	41
	OSD Position Adjustment	41
	V Blanking Size Adjustment (Zoo Mode)	42
	V Size Adjustment (Zoo Mode)	42
	H Size Adjustment (Zoo Mode)	43
	S Correction Adjustment (Wide Zoom)	43
	V Size Adjustment (Wide Zoom)	43
	H Size Adjustment (Wide Zoom)	44
5.	**SAFETY RELATED ADJUSTMENTS**	44
6.	**DIAGRAMS**	
	6-1. Block Diagrams (1)	48
	Block Diagrams (2)	51
	Block Diagrams (3)	55
	Block Diagrams (4)	59
	Block Diagrams (5)	61
	6-2. Frame Schematic Diagram	63
	6-3. Circuit Boards Location	66
	6-4. Printed Wiring Boards and Schamatic Diagrams	66
	• K Board	67
	• A Board	68
	• E Board	71
	• D Board	75
	• G Board	83
	• B(1/4) Board	86
	• B(2/4) Board	89
	• B(3/4) Board	93
	• B(4/4) Board	97
	• U(1/2) Board	101
	• U(2/2) Board	105
	• HA Board	110
	• HB Board	110
	• ZR Board	110
	• CR Board	111
	• ZG Board	111
	• CG Board	112
	• ZB Board	112
	• CB Board	113
	6-5. Semiconductors	116
7.	**EXPLODED VIEWS**	
	7-1. Control Panel, Mirror Cover and Beznet	118
	7-2. Chassis	119
	7-3. Picture Tube	120
8.	**ELECTRICAL PARTS LIST**	121

(CAUTION)

SHORT CIRCUIT THE ANODE OF THE PICTURE TUBE AND THE ANODE CAP TO THE METAL CHASSIS, CRT SHIELD, OR CARBON PAINTED ON THE CRT, AFTER REMOVING THE ANODE.

WARNING!!

AN ISOLATION TRANSFORMER SHOULD BE USED DURING ANY SERVICE TO AVOID POSSIBLE SHOCK HAZARD, BECAUSE OF LIVE CHASSIS.

THE CHASSIS OF THIS RECEIVER IS DIRECTLY CONNECTED TO THE AC POWER LINE.

SAFETY-RELATED COMPONENT WARNING!!

COMPONENTS IDENTIFIED BY SHADING AND MARK ⚠ ON THE SCHEMATIC DIAGRAMS, EXPLODED VIEWS AND IN THE PARTS LIST ARE CRITICAL TO SAFE OPERATION. REPLACE THESECOMPONENTS WITH SONY PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL OR IN SUPPLEMENTS PUBLISHED BY SONY. CIRCUIT ADJUSTMENTS THAT ARE CRITICAL TO SAFEOPERATION ARE IDENTIFIED IN THIS MANUAL. FOLLOW THESE PROCEDURES WHENEVER CRITICAL COMPONENTS ARE REPLACED OR IMPROPER OPERATION IS SUSPECTED.

(ATTENTION)

APRES AVOIR DECONNECTE LE CAP DE L'ANODE, COURTCIRCUITER L'ANODE DU TUBE CATHODIQUE ET CELUI DE L'ANODE DU CAP AU CHASSIS METALLIQUE DE L'APPAREIL, OU AU COUCHE DE CARBONE PEINTE SUR LE TUBE CATHODIQUE OU AU BLINDAGE DU TUBE CATHODIQUE.

ATTENTION!!

AFIN D'EVITER TOUT RISQUE DELECTROCUTION PROVENANT D'UN CHÁSSIS SOUS TENSION, UN TRANSFORMATEUR D'ISOLEMENT DOIT ETRE UTILISÉ LORS DE TOUT DEPANNAGE.

LE CHÁSSIS DE CE RECEPTEUR EST DIRECTEMENT RACCORDÉ Á L'ALIMENTATION SECTEUR.

ATTENTION AUX COMPOSANTS RELATIFS ÁLA SÉCURITÉ!!

LES COMPOSANTS IDENTIFIÉS PAR UNE TRAME ET PAR UNE MAPQUE ⚠ SUR LES SCHÉMAS DE PRINCIPE, LES VUES EXPLOSÉES ET LES LISTES DE PIECES CONT D'UNEIMPORTANCE CRITIQUE POUR LA SÉCURITÉ DU FONCTIONNEMENT. NE LES REMPLACER QUE PAR DES COMPOSANTS SONY DONT LE NUMÉRO DE PIÉCE EST INDIQUÉ DANS LE PRÉSENT MANUEL OU DANS DES SUPPLÉMENTS PUBLIÉS PAR SONY. LES RÉGLAGES DE CIRCUIT DONT L'IMPORTANCE EST CRITIQUE POUR LA SÉCURITÉ DU FONCTIONNEMENT SONT IDENTIFIES DANS LE PRÉSENT MANUEL. SUIVRE CES PROCÉDURES LORS DE CHAQUE REMPLACEMENT DE COMPOSANTS CRITIQUES, OU LORSQU'UN MAUVAIS FONCTIONNEMENT EST SUSPECTÉ.

SECTION1
GENERAL

The operating instructions mentioned here are partial abstracts from the Operating Instruction Manual. The page numbers of the Operating Instruction Manual remein as in the manual.

Installing the projection TV

For the best picture quality, install the projection TV within the areas shown below.

Optimum viewing area (Horizontal)

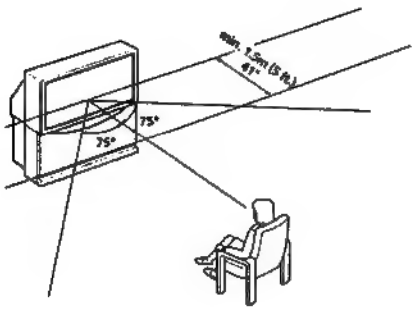

Optimum viewing area (Vertical)

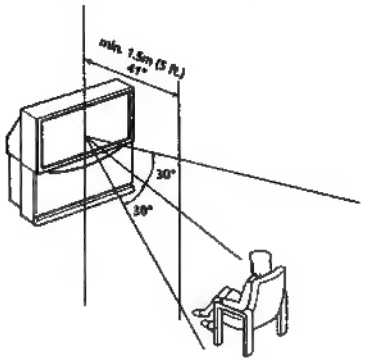

Stabilizing the projection TV

The projection TV should be installed as level as possible, for safety purposes. After setting up, adjust the two adjustable legs located at the bottom, and secure the projection TV to a wall, etc., with the supplied brackets.

1 Turn the two adjustable legs located at the bottom to the left until they touch the floor. This will stabilize the projection TV.

2 ① Mount the two supplied brackets with the screws to the upper rear side of the projection TV.

(Rear of the projection TV)

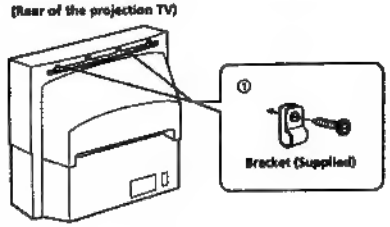

② Pass a strong cord or a chain through each bracket mounted in ①, and then secure to a wall or a pillar, etc.

Changing the menu language

If you prefer Chinese to English, you can change the menu language. You can use the buttons on both the remote commander and the projection TV.



1 Press POWER on the projection TV.



2 Press MENU.

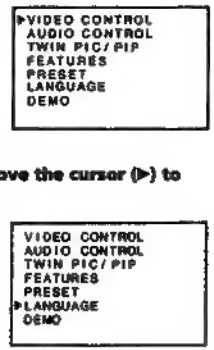

3 Press Δ + or ∇ – to move the cursor (▶) to LANGUAGE.

4 Press ENTER.

5 Press Δ + or ∇ – to select CHINESE.

6 Press ENTER.

7 Press MENU to return to the normal screen.

Adjusting the convergence (CONVERGENCE)

Before you use the projection TV, adjust convergence. The projection tube image appears on the screen in three layers (red, green and blue). If they do not converge, the color is poor and the picture blurs. To correct this, adjust convergence.
After 20-30 minutes of turning on the power, adjust convergence.

1 Press MENU.

2 Press △ + or ▽ – to move the cursor (▶) to FEATURES and press ENTER.

3 Press △ + or ▽ – to move the cursor (▶) to CONVERGENCE and press ENTER.
The CONVERGENCE adjustment screen appears.



4 Press △ + or ▽ – to move the cursor (▶) to the symbol showing the line you want to adjust, and press ENTER.



+ : Red vertical line (left/right adjustment)
+ : Red horizontal line (up/down adjustment)
+ : Blue vertical line (left/right adjustment)
+ : Blue horizontal line (up/down adjustment)

5 Press △ + or ▽ – to move the line until it converges with the center green line, and press ENTER.



To move up/right, press △ +.
To move down/left, press ▽ –.

6 Repeat step 4 and 5 to adjust the other lines until all three lines converge and are seen as a white cross.



7 Press MENU to return to the normal screen.

Presetting channels

You can preset TV channels easily by storing all the receivable channels automatically. You can also preset channels manually or skip program positions (page 23). You can preset channels using the buttons on the projection TV as well as those on the remote commander.

Presetting channels automatically

You can preset up to 100 TV channels in numerical sequence from program position 1.



1 Press MENU.

2 Press △ + or ▽ – to move the cursor (▶) to PRESET.

3 Press ENTER.



4 Press △ + or ▽ – to select AUTO PROGR.

5 Press ENTER.

6 Press △ + or ▽ – to select your area (channel system).
For the areas allocated in each channel system, see "Channel allocation" on page 28.

7 Press ENTER.
Presetting starts from program 1.



Introducing the menu

You can preset channels and set the wide mode, picture quality, sound, and other settings using the on-screen menus. You can use the buttons on both remote commander and the projection TV to operate the menus.

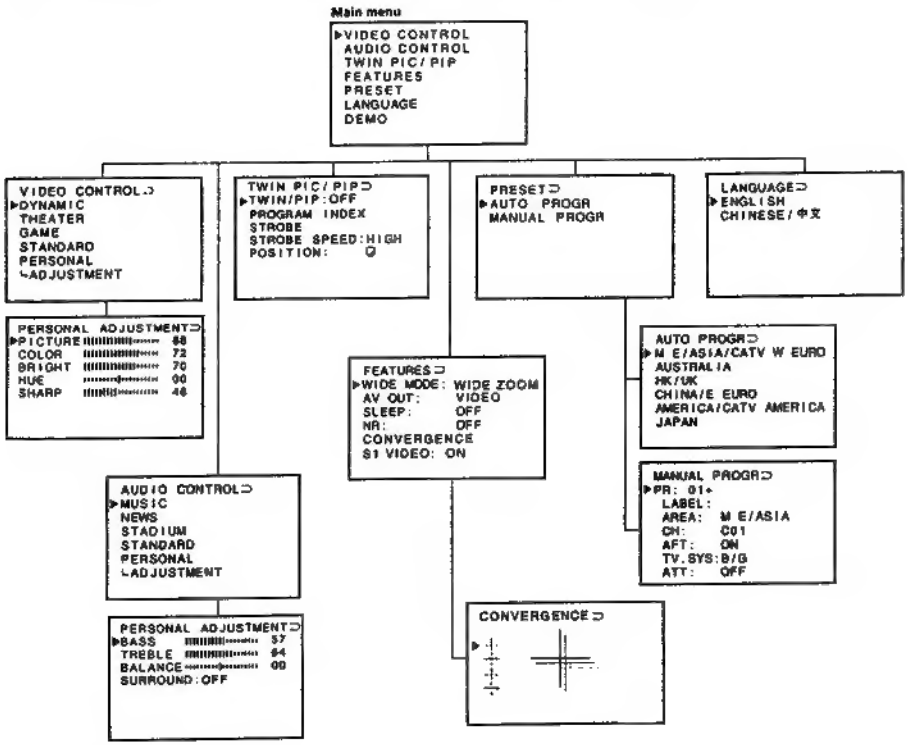

Getting back to the previous menu

Press △ + or ▽ – to move the cursor (▶) to the first line (⊃) of each menu (except for the main menu), and press ENTER.

Cancelling the menu screen

Press MENU.

Notes

- If more than 60 seconds elapse after you press a button, the menu screen disappears automatically.
- DEMO in the main menu briefly introduces the main features available for the projection TV. Press any button on the remote commander to stop this function.

Watching the TV

1 Select the TV program you want to watch.
Press the number buttons or PROGR +/–. The projection TV turns on automatically and the selected program appears.
When the STANDBY indicator on the front of the projection TV is not lit, press POWER on the projection TV, and select the program position.



To select a program position directly
Press the number buttons.

To select a two-digit program position, press "-/--" before the number buttons.
For example, to select program position 25, press "-/--" and then "2" and "5."

To scan through program positions
Press PROGR +/– until the program position you want appears.

To select a channel directly
Press C (once for VHF/UHF channels, twice for cable TV channels), then press the number buttons (two-digit number for VHF/UHF channels, three-digit number for cable TV channels). For example, to select the VHF/UHF channel 4, press C, 0 then 4.

2 Press VOL +/– to adjust the volume.

Switching off the projection TV

To switch off the projection TV temporarily, press POWER on the remote commander.
The STANDBY indicator lights.



To switch off the projection TV completely, press POWER on the TV.

Watching the video input

Press VIDEO/HOLD.

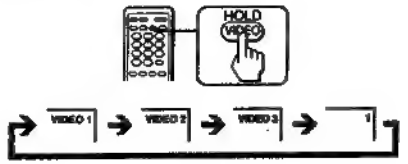

To watch projection TV, press TV, the number buttons or PROGR +/–.



Muting the sound

Press MUTING.

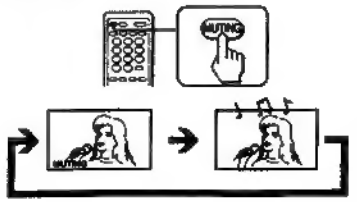

Displaying on-screen information

Press DISP.

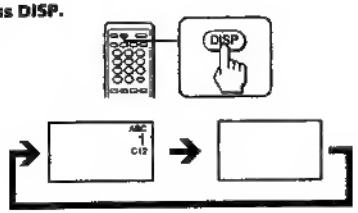

Note

- When you press DISP, the on-screen display shows the picture, sound and wide mode settings as well, all of which disappear after three seconds.

Freezing the Picture

Press FREEZE.

The screen will become TWIN PICTURE, and the freezed picture will appear on the right screen.

Setting the Sleep Timer

You can set the projection TV to turn off automatically after the period of time you set.

1 Press MENU.

2 Press Δ + or ∇ – to move the cursor (▶) to FEATURES, and press ENTER.

3 Press Δ + or ∇ – to move the cursor (▶) to SLEEP, and press ENTER.

4 Press Δ + or ∇ – until the time (in minutes) you want appears.

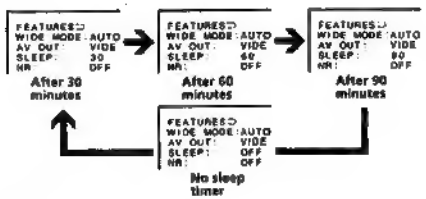

5 Press ENTER.

To cancel the Sleep Timer, select OFF, or turn the projection TV off.

Watching the picture in wide mode

You can enjoy a variety of wide-mode pictures. The projection TV's WIDE MODE factory preset is WIDE ZOOM. The WIDE MODE is retained in the memory after the power is turned off. You can also manually set the WIDE MODE in the FEATURES menu.

Using the AUTO WIDE function

When you set the TV picture mode on AUTO WIDE, the projection TV will automatically choose the wide picture mode (WIDE ZOOM/ZOOM/SUBTITLE) that is most suitable for the program you are watching.

Press AUTO WIDE.



Notes on AUTO WIDE

- Depending on the picture sources, the AUTO WIDE function may not stick to one mode. It may differ. In this case, select your desired wide mode using the WIDE button.
- The AUTO WIDE function is not available for SECAM color system.

Using the WIDE function

You can preview all wide-mode pictures and set the desired mode by pressing the WIDE button on your remote commander.

Press WIDE until the mode you want appears on the screen.



AUTO WIDE → WIDE ZOOM → ZOOM → SUBTITLE → NORMAL → FULL

WIDE ZOOM
This mode is ideal when viewing a movie or sports programs.

Conventional picture (NORMAL mode) *WIDE ZOOM*

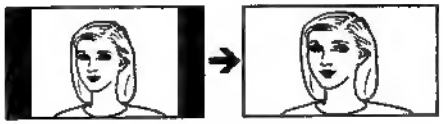

ZOOM
This mode is best for viewing a movie with black bands or subtitles.

Conventional picture (NORMAL mode) *ZOOM*

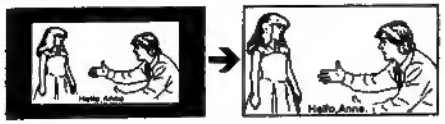

SUBTITLE
This mode is most suitable when watching movies with subtitles.

Conventional picture (NORMAL mode) *SUBTITLE*

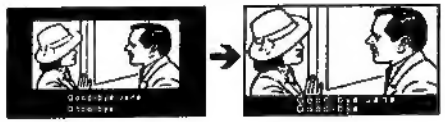

Viewing a picture in FULL mode

When you are watching a video game screen with dynamic effect or watching an S1 Video picture, use FULL mode.

Conventional picture (NORMAL mode) *FULL*

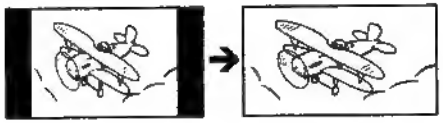

Scrolling the picture up or down

If subtitles are lost in subtitle mode, you can scroll the picture up or down to view them. The picture scrolls up or down within the range of -5 to +5. You can also use the scroll function in widezoom and zoom modes. Using the scroll function in widezoom mode changes the vertical size of the picture.

1 Press SCROLL.



2 Press Δ + or ∇ – to adjust the position of the picture.



Note

- If you display the PIP screen in zoom mode or scroll the picture with the PIP screen in zoom mode or subtitle mode, the PIP screen may be lost. However, this does not indicate a malfunction.

Selecting the desired WIDE MODE from the menu

When AUTO WIDE is set, the projection TV automatically picks the best mode. You can use the FEATURES menu to select another mode.

1 Press MENU.

2 Press Δ + or ∇ – to move the cursor (▶) to FEATURES, and press ENTER.

3 Press Δ + or ∇ – to move the cursor (▶) to WIDE MODE, and press ENTER.

4 Press Δ + or ∇ – to select the desired mode, and press ENTER.

To see the different wide picture modes, refer to page 12 and 13.

Watching two programs at one time-TWIN PICTURE and PIP

You can display a left and right TWIN PICTURE screens or display a Picture-in-Picture (PIP) sub screen within the main picture.

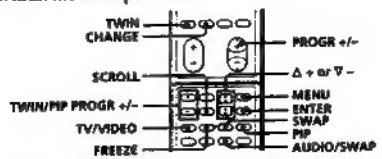

Displaying TWIN PICTURE

You can display two screen pictures side by side using the TWIN/PIP menu and/or the TWIN button on the remote commander.

Press TWIN.

Selecting a TV program or video input in the right TWIN PICTURE screen

To select a TV program, press TWIN/PIP PROGR +/– button.

To select a video input, press TV/VIDEO.

Notes

- You cannot select the same channel on the right and left screens.
- When a fast-moving picture is displayed in the right TWIN PICTURE screen, the picture may look unnatural. This is not a malfunction. To correct, press CHANGE to switch the right and left TWIN PICTURE screens.

Displaying PIP

You can display PIP by using the TWIN/PIP menu and/or the PIP button on the remote commander.

Press PIP.

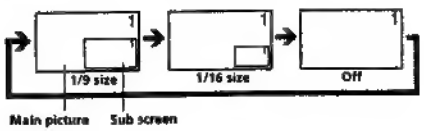

Selecting a TV program or video input in the PIP screen

To select a TV program, press TWIN/PIP PROGR +/– button.

To select a video input, press TV/VIDEO.

Freezing TWIN PICTURE and the PIP screen

Press FREEZE.

The PIP sub screen or right TWIN PICTURE screen will freeze.

To restore the normal picture, press FREEZE again.

Changing the left and right TWIN PICTURE screens

Press CHANGE.



Swapping pictures between the main and PIP screens

Press SWAP.



Swapping the sound between TWIN PICTURE's right and left screens or PIP's main and sub screens

Press AUDIO SWAP.

The "♪" display will appear indicating which TWIN PICTURE's sound is being received.

Changing the position of the PIP screen

1 Press MENU.

2 Press Δ + or ∇ – to move the cursor (▶) to TWIN PIC/PIP, and press ENTER.

3 Press Δ + or ∇ – to move the cursor (▶) to POSITION, and press ENTER.

4 Press Δ + or ∇ – to select the position you want.

Pressing Δ + changes the position as shown below.

Pressing ∇ – changes the position in reverse order.

Selecting TWIN PICTURE or PIP from the menu

Follow these directions to select PIP and TWIN PICTURE from the TWIN PIC/PIP menu.

1 Press MENU.

2 Press Δ + or ∇ – to move the cursor (▶) to TWIN PIC/PIP, and press ENTER.

3 Press Δ + or ∇ – to move the cursor (▶) to TWIN/PIP, and press ENTER.

4 Press Δ + or ∇ – to select TWIN, PIP 1 or PIP 2, and press ENTER.

To view a sample of the TWIN PICTURE and PIP screens, see "Displaying PIP" and "Displaying TWIN PICTURE" sections.

Checking all the preset programs (Program Index)

Press INDEX.

The nine preset programs appear in the separated screen in sequence, switching the picture for each second. The sound is muted. Then next nine sequential programs appear. After all the preset programs are displayed, the programs switch the picture with the sound for each five seconds. Pressing PROGR + also switches to the next nine programs.



To restore the normal picture

Press the number buttons which you want to watch (e.g., for program 25, press -/--, 2 and 5). Pressing INDEX also restores the normal picture.

Notes

- You can also display nine sequential TV programs using the menu. Select PROGRAM INDEX from the TWIN PIC/PIP menu, then press ENTER.
- If you display different TV systems in the Program Index screen, the size of the separated screens may be different.
- You can not use TWIN PICTURE while PROGRAM INDEX is selected.

Displaying frame-by-frame pictures (Strobe)

1 Press MENU.

2 Press △ + or ▽ – to move the cursor (▶) to TWIN PIC/PIP, and press ENTER.

3 Press △ + or ▽ – to move the cursor (▶) to STROBE, and press ENTER.

To select the strobe speed

Select STROBE SPEED from the TWIN PIC/PIP menu, and press ENTER. Then select HIGH (3 seconds), MIDDLE (7 seconds) or LOW (12 seconds) with △ + or ▽ –, and press ENTER.

To restore the normal picture

Select STROBE from the TWIN PIC/PIP menu again, and press ENTER.

You can also restore the normal picture with TV, VIDEO, PROGR +/–, POWER or Wide mode buttons.

Notes

- You can hear the normal sound when using the strobe feature.
- You can not watch TWIN PICTURE when STROBE is selected.

Notes on TWIN PICTURE features

- If you display different color systems in the right and left screens, the size of screen may be different.
- The sound from the right screen is monaural.

Notes on PIP features

- When you display a VCR picture in the PIP screen at a speed other than normal speed, the picture may be noisy depending on the VCR. The picture can be improved by selecting the smaller size of the PIP screen.
- If you display different color systems in the main screen and the PIP screen, the size of the PIP screen may be different and the PIP picture may be noisy. This is not caused by the malfunction of the TV.

Selecting the picture mode

You can select the picture mode using the menu as well as the PICTURE MODE button on the remote commander. Select VIDEO CONTROL from the main menu, then select the desired mode.

Press PICTURE MODE until the mode you want appears on the screen.





Select	To
DYNAMIC	Display more contrast picture
THEATER	Display darker and finely detailed picture suitable for movies
GAME	Display softer picture suitable for the video games
STANDARD	Display normal contrast picture
PERSONAL	Display the picture that is adjusted using ADJUSTMENT in the VIDEO CONTROL menu

Viewing a video game screen

Press PICTURE MODE until the GAME mode appears on the screen.

The screen changes to the optimum mode for video games with soft picture. The WIDE MODE is automatically set on FULL mode.

If the fixed (non-moving) pattern is on the screen for long periods of time

Keep the picture functions at low settings (see "Adjusting the picture setting" on page 17). If not, the image may be permanently imprinted on the screen.

Note

- To prevent imprints on the screen, the picture shifts horizontally about 5 mm every 30 minutes in the GAME mode. This is not a malfunction of the TV.

Adjusting the picture setting (ADJUSTMENT)

You can adjust the picture quality to suit your taste with the ADJUSTMENT option. The adjusted settings are stored in the PERSONAL option.



1 Press MENU.

2 Press △ + or ▽ – to move the cursor (▶) to VIDEO CONTROL, and press ENTER.

3 Press △ + or ▽ – to move the cursor (▶) to ADJUSTMENT, and press ENTER.



4 Press △ + or ▽ – to move the cursor (▶) to the item you want to adjust, and press ENTER.

5 Press △ + or ▽ – to adjust the item, and press ENTER.

Item	Press △ + to	Press ▽ – to
PICTURE	Increase picture contrast	Decrease picture contrast
COLOR	Increase color intensity	Decrease color intensity
BRIGHT	Brighten the picture	Darken the picture
HUE	Make skin tones become greenish	Make skin tones become reddish
SHARP	Sharpen the picture	Soften the picture

6 To adjust other items, repeat steps 4 and 5.

7 Press MENU to return to the normal screen.

Note

- You can adjust HUE for NTSC color system only.

Reducing the noise of the picture (NR)

You can reduce the noise level of the picture when the TV receives a weak signal or when you play a video tape that is in poor condition.

1 Press MENU.

2 Press △ + or ▽ – to select FEATURES, and press ENTER.

3 Press △ + or ▽ – to select NR, and press ENTER.

4 Press △ + or ▽ – to select ON, and press ENTER.

To turn the noise reduction off, select OFF and press ENTER.

If the color of the picture is abnormal when receiving programs through the ᚼ (antenna) terminal

Press COLOR SYSTEM on the projection TV or change the TV system setting from the menu as described below until the color becomes normal.

1 **Press MENU.**
2 **Press △ + or ▽ – to move the cursor (▶) to PRESET, and press ENTER.**
3 **Press △ + or ▽ – to move the cursor (▶) to MANUAL PROGR, and press ENTER.**
4 **Press △ + or ▽ – to move the cursor (▶) to TV SYS, and press ENTER.**
5 **Press △ + or ▽ – to change the TV system until the color becomes normal.**

Note

- Normally set COLOR SYSTEM to AUTO.

Selecting the sound mode

You can select the sound mode using the menu as well as the SOUND MODE button on the remote commander. Select AUDIO CONTROL from the main menu, then select the desired mode.

Press SOUND MODE until the mode you want appears on the screen.

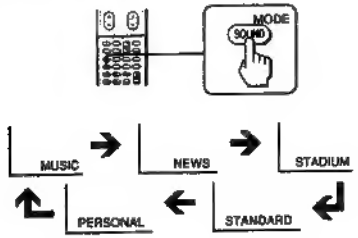

Select	To
MUSIC	Listen to music programs. It gives sound with a live concert effect.
NEWS	Listen to news program. A person's voice can be heard clearly.
STADIUM	Listen to sports program. It gives sound with a sports stadium effect.
STANDARD	Listen to sound other than music, news or sports program.
PERSONAL	Listen to the sound that is adjusted using ADJUSTMENT in the AUDIO CONTROL menu.

Adjusting the sound setting (ADJUSTMENT)

You can adjust the sound quality to suit your taste with the ADJUSTMENT option. The adjusted settings are stored in the PERSONAL option.



1 Press MENU.

2 Press Δ + or ∇ – to move the cursor (▶) to AUDIO CONTROL, and press ENTER.

3 Press Δ + or ∇ – to move the cursor (▶) to ADJUSTMENT, and press ENTER.



4 Press Δ + or ∇ – to move the cursor (▶) to the item you want to adjust, and press ENTER.

5 Press Δ + or ∇ – to adjust the item, and press ENTER.

Item	Press Δ + to	Press ∇ – to
BASS	Increase the bass sound	Decrease the bass sound
TREBLE	Increase the treble sound	Decrease the treble sound
BALANCE	Increase the volume of right speaker	Increase the volume of left speaker

6 To adjust other items, repeat steps 4 and 5.

7 Press MENU to return to the normal screen.

Listening to surround sound

You can enjoy a surround sound effect that is like being in a movie theater or a concert hall when receiving stereo signals.

1 Press MENU.

2 Press Δ + or ∇ – to move the cursor (▶) to AUDIO CONTROL, and press ENTER.

3 Press Δ + or ∇ – to move the cursor (▶) to ADJUSTMENT, and press ENTER.



4 Press Δ + or ∇ – to move the cursor (▶) to SURROUND, and press ENTER.

5 Press Δ + or ∇ – to select ON, and press ENTER.

If the sound is distorted or noisy when receiving programs through the 𝕋 (antenna) terminal

Press COLOR SYSTEM on the projection TV or change the TV system setting as follows until the sound becomes clear.

1 **Press MENU.**
2 **Press Δ + or ∇ – to move the cursor (▶) to PRESET, and press ENTER.**
3 **Press Δ + or ∇ – to move the cursor (▶) to MANUAL PROGR, and press ENTER.**
4 **Press Δ + or ∇ – to move the cursor (▶) to TV SYS, and press ENTER.**
5 **Press Δ + or ∇ – to change the TV system until the sound becomes clear.**

Note

- Normally set COLOR SYSTEM to AUTO.

Selecting a stereo or bilingual program

You can enjoy stereo sound or bilingual program of NICAM and A2 (German) stereo systems. The initial setting is stereo sound.

Press A/B/ENLARGE repeatedly until you receive the sound you want.
The sound changes and the corresponding indicator lights up as follows:



When receiving a NICAM program:

Broadcasting	On-screen Display	Selected sound (Indicator lit)
NICAM stereo	NICAM	→ Stereo → Regular (A and B)
NICAM bilingual	NICAM	→ A → B → Regular (A) (B)
NICAM monaural	NICAM	→ NICAM monaural (A) Regular

When receiving an A2 (German) stereo program:

Broadcasting	On-screen display	Selected sound (Indicator lit)
A2 (German) stereo	STEREO	→ Stereo → Monaural (A and B)
A2 (German) bilingual	—	→ A → B (A) (B)

Receiving area for NICAM and A2 (German) stereo programs

System	Receiving area
NICAM	Hong Kong, Singapore, New Zealand, etc.
A2 (German) stereo	Australia, Malaysia, Thailand, etc.

Notes

- If the signal is very weak, the sound becomes monaural.
- If the stereo sound is noisy, select "regular" or "mono." The sound becomes monaural, however, the noise will be reduced.

Viewing Teletext

TV stations broadcast an information service called Teletext via a local TV channel.
Teletext service allows you to receive various information such as weather forecasts or news at any time. Some of the features, however, may not be available depending on the Teletext service.



Displaying Teletext

1 Select a TV channel which carries the Teletext broadcast you want to watch.

2 Press TEXT to display the Teletext.
A Teletext page (normally the index page) is displayed on the left. If there is no Teletext broadcast, P100 appears in the top left corner of the screen.

To switch Teletext off, press TV.

Superimposing a Teletext page on the TV picture

Press TEXT.
Each time you press TEXT, the screen changes as follows:

→ Teletext → Teletext and TV → TV →

Checking the contents of a Teletext service (INDEX)

When Teletext is switched on, you can display the Teletext menu.

1 Press MENU.



2 Press ∎ + or ∇ – to move the cursor (▸) to INDEX, and press ENTER.

Selecting a Teletext page

Press the number buttons to enter the three-digit page number of the Teletext number you want.
If you make a mistake, re-enter the correct page number.

To access the next or previous page, press PROGR +/–.

Note
- When you request another Teletext page while viewing one Teletext page, the page scrolling may pause on a different page depending on the Teletext service, but the search will continue till the requested page is displayed.

Preventing a Teletext page from being updated (HOLD)

A Teletext page may consist of several subpages. You can stop the page scrolling in order to read the text at your own pace.

Press VIDEO/HOLD.
HOLD appears in the top left corner of the screen.

To resume normal Teletext operation, press TEXT.

Using FASTEXT

This feature allows you to quickly access a Teletext page that uses FASTEXT. When a FASTEXT page is broadcast, a color-coded menu appears at the bottom of the screen. The colors of the menu correspond to the red (TV/VIDEO), green (FREEZE), yellow (SWAP) and blue (PIP) buttons on the remote commander. These colored buttons function as the FASTEXT buttons in Teletext mode.

Press the colored button which corresponds to the color-coded menu.
The page is displayed after a few seconds.

Enlarging the Teletext display (ENLARGE)

Each time you press A/B/ENLARGE, the Teletext display changes as follows:

→Enlarge upper half→Enlarge lower half→Normal size→

Revealing concealed information (REVEAL)

Sometimes pages contain concealed information, such as answers to a quiz. The reveal option discloses the information.

1 Press MENU.

2 Press Δ + or ∇ – to move the cursor (▸) to REVEAL, and press ENTER.

3 Press Δ + or ∇ – to select ON, and press ENTER.

To conceal the information again, select OFF.

Watching a TV program while waiting for a requested Teletext page (TEXT CLEAR)

1 Select the Teletext page to which you want to refer.

2 Press MENU.

3 Press Δ + or ∇ – to move the cursor (▸) to TEXT CLEAR, and press ENTER.

4 When the page number is displayed on the screen, press TEXT to switch the Teletext on.

To restore the normal Teletext reception, press TEXT.

Displaying subtitles (SUBTITLES)

Your Teletext service informs you if a TV program is subtitled.

1 Press MENU.

2 Press Δ + or ∇ – to move the cursor (▸) to SUBTITLES, and press ENTER.

Note
- If the subtitles are not broadcast on page 888, select the subtitle page using the number buttons.

Displaying a Teletext page at the requested time (TIME PAGE)

You can display a time-coded page (e.g. an alarm page) at the time you preset.

1 Press MENU.

2 Press Δ + or ∇ – to move the cursor (▸) to TIME PAGE, and press ENTER.

3 Press the number buttons to enter four digits for the desired time. For example, to enter 7:30, press 0,7,3 and 0.

At the requested time, the page appears on the screen.

To restore the normal Teletext reception, press TEXT.

Displaying a particular page among several subpages (SUBPAGE)

1 Press MENU.

2 Press Δ + or ∇ – to move the cursor (▸) to SUBPAGE, and press ENTER.

3 Press the number buttons or PROGR +/– to enter four digits for the desired subpage. For example, to display the second page of a sequence, press 0, 0, 0 and 2.

Using headphones

You can use headphones to enjoy the sound of the TV. This feature also allows you ■ enjoy the sound of PIP and TWIN PICTURE screens.

Listening to the sound of the projection TV with headphones

Insert the headphones into the ∩ (headphones) jack located on the front panel of the projection TV.
The sound from the speaker is shut off.
To adjust the headphones volume, press VOL +/–.



Setting the output of your headphones

When using TWIN PICTURE and PIP, you will have to select the output of your headphones. For example, with TWIN PICTURE, you can select right and left picture sound. Whereas with PIP, you can select main or sub picture sound.

Press AUDIO SWAP.



Customizing the projection TV

Using the AV OUT (advance rec-out) terminal

You can select the output signal from the VIDEO jacks at the rear of the projection TV.
The S Video output can be used only when VIDEO is selected. However, it cannot be used ■ Program Index or Strobe mode even though VIDEO is selected.

1 Press MENU.

2 Press Δ + or ∇ – to select FEATURES, and press ENTER.

3 Press Δ + or ∇ – to select AV OUT, and press ENTER.

4 Press Δ + or ∇ – to select the output signal, and press ENTER.

Select	To
TV	Output the TV signal.
VIDEO	Output the signal of the picture you are watching as a main picture. (For TWIN PICTURE, a left picture will be output.)

Selecting a TV program output from VIDEO/TV OUT jacks while using the PIP feature
When watching a TV program in the main screen, use PROGR +/–.

Note
- Do not change the channel or use AUDIO SWAP while recording with a VCR through the VIDEO/TV OUT jacks. If you change the channel, it also changes the channel you are recording.

Presetting channels manually

To change the program position for a channel or to receive a channel with a weak signal, preset the channel manually.
For example, preset a channel in program position 8.

1 Press MENU.

2 Press Δ + or ∇ – to move the cursor (▶) to PRESET, and press ENTER.

3 Press Δ + or ∇ – to select MANUAL PROGR, and press ENTER.

4 Select the program position to which you want to preset a channel.
(1) Press Δ + or ∇ – to select PR, and press ENTER.
(2) Press Δ + or ∇ – to select ■
You can also select the program position with PROGR +/– or the number buttons (e.g., for program 24, press -/--, 2 and 4).
■ Press ENTER.

5 Select your area (channel system).
For the areas allocated ■ each channel system, see "Channel allocation" on page 28.
(1) Press Δ + or ∇ – to select AREA, and press ENTER.
(2) Press Δ + or ∇ – to select your area, and press ENTER.

6 Select a channel which you want to preset.
(1) Press Δ + or ∇ – to select CH, and press ENTER.
(2) Press Δ + or ∇ – until the channel you want appears on the screen.
You can also select the channel directly using the number buttons. Press C (once for VHF/UHF channels, twice for cable TV channels), then the number buttons (e.g., for channel 5, press 0 and 5).
(3) Press ENTER.

To preset other channels
Repeat steps 4 to 6.

Disabling program positions

By disabling unused or unwanted program positions, you can skip those positions when you press PROGR +/–.
For example, disable program position ■

1 Display the MANUAL PROGR menu. (Follow steps 1 to 3 in "Presetting channels manually" on this page.)

2 Press Δ + or ∇ – to move the cursor (▶) to PR, and press ENTER.

3 Press PROGR + or – until 8 appears.

4 Press Δ + or ∇ – to select "–", and press ENTER.
To skip other program positions, repeat steps 3 and 4.

To restore the skipped program positions
■ step 4 above, press Δ + or ∇ – to select "+," and press ENTER.

Customizing channel names

You can caption each channel number using up to five letters to be displayed on the screen.

1 **Display the MANUAL PROGR menu. (Follow steps 1 to 3 in "Presetting channels manually" on this page.)**

2 **Press △ + or ▽ – to move the cursor (▶) to PR, and press ENTER.**

3 **Press △ + or ▽ – to select the program position you want to caption and press ENTER.**

4 **Press △ + or ▽ – to move the cursor (▶) to LABEL, and press ENTER.**

5 **Press △ + or ▽ – to select a letter or number, and press ENTER for each caption space (up to five.)**
Each time you press △ + or ▽ –, the letter (number) changes as shown below.
A→B→...→Z→0→1→...→9→+ – →;→/→. → ←→_ (space)
For the caption space you want to leave blank, select "–."

6 **Repeat steps 2 to 5 to caption other channels.**

To erase a caption
In step 5 above, select "_ (space)."

Manual fine-tuning

Normally, the automatic fine-tuning (AFT) is operating. However, if the picture of a channel is distorted, you can use the manual fine-tuning function for the channel to obtain better picture reception.

1 **Display the MANUAL PROGR menu. (Follow steps 1 to 3 in "Presetting channels manually" on page 23.)**

2 **Press △ + or ▽ – to move the cursor (▶) to PR, and press ENTER.**

3 **Press △ + or ▽ – to select the program position corresponding to the channel which you want to manually fine-tune, and press ENTER.**

4 **Press △ + or ▽ – to move the cursor (▶) to AFT, and press ENTER.**

5 **Press △ + or ▽ – to select OFF, and press ENTER.**

6 **Press △ + or ▽ – to fine-tune the channel so that you get the best TV reception.**
As you press these buttons, the frequency changes from –128 to +128.

7 **After fine-tuning, press ENTER.**
The fine-tuned level is stored.

Improving TV signal

If the reception signal is very strong, you can attenuate it to obtain better picture reception.

1 **Display the MANUAL PROGR menu. (Follow steps 1 to 3 in "Presetting channels manually" on page 23.)**

2 **Press △ + or ▽ – to move the cursor (▶) to PR, and press ENTER.**

3 **Press △ + or ▽ – to select the program position corresponding to the channel whose signal is very strong, and press ENTER.**

4 **Press △ + or ▽ – to move the cursor (▶) to ATT, and press ENTER.**

5 **Press △ + or ▽ – to select ON, and press ENTER.**

Setting S1 Video

The default setting for S1 Video in the Features menu is ON. If an S1 Video signal is received, the projection TV will automatically display the screen in FULL mode. You can turn this function off by setting S1 VIDEO to OFF.

1 **Press MENU.**

2 **Press △ + or ▽ – to move the cursor (▶) to FEATURES, and press ENTER.**

3 **Press △ + or ▽ – to move the cursor (▶) to S1 VIDEO, and press ENTER.**

4 **Press △ + or ▽ – to select ON or OFF, and press ENTER.**

Setting the remote command mode

You can use the supplied remote commander to operate the TV and Sony video equipment, such as a VCR or multi-disc player. To operate Sony video equipment, first set the remote command mode for the video equipment you want to use.



1 **Press and hold the POWER button in the VCR control area.**

2 **Press the number buttons that correspond to the remote command mode.**

Mode number buttons	Remote command mode
0 and then 1	VTR1 (e.g., Beta format VCR)
0 and then 2	VTR2 (e.g., 8 mm format VCR)
0 and then 3	VTR3 (e.g., VHS format VCR)
0 and then 4	MDP (multi-disc player)

After setting the remote command mode, you can use the following buttons to operate the video equipment.



Connections

Connecting a VHF antenna or a combination VHF/UHF antenna—75-ohm coaxial cable (round)

Attach an optional IEC antenna connector to the 75-ohm coaxial cable.
Plug the connector into the 𝕋 (antenna) terminal at the rear of the projection TV.

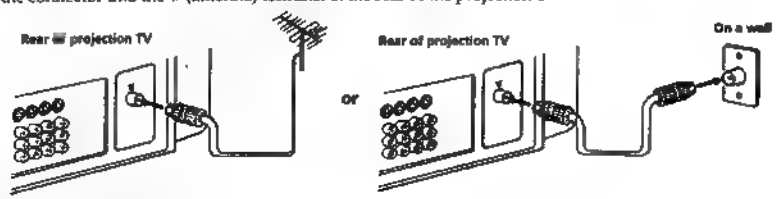

Connecting optional equipment

You can connect optional audio/video equipment to this projection TV such as a VCR, multi-disc player, camcorder, headphones, or stereo system.

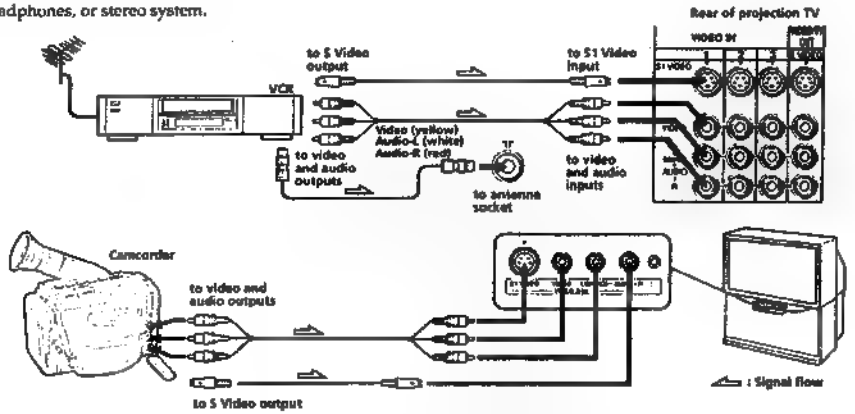

When connecting a monaural VCR
Connect the yellow plug to VIDEO and the white plug to AUDIO-L (mono).

Note on the S1 Video signal
When the S1 Video signal is input through the VIDEO 1/2/3 IN jack, set WIDE MODE ➡ OFF if you do not want to display the picture in full wide mode (see page 13).

If both S Video and video signals are input
The S Video input signal is selected. To view a video signal, disconnect the S Video connection.

Note on the video input
When no signal is input, the screen becomes black and on-screen display becomes dark.

When connecting a VCR to the VIDEO 3 IN jacks
This projection TV is equipped with two sets of the VIDEO 3 IN jacks on the front and rear panels. Front and rear jacks are not available to be used at the same time. When using equipment connected, turn off other equipment not in use.

Channel allocation

Areas allocated in each channel system

M E/ASIA/CATV W EURO
Afghanistan, Albania, Algeria, Austria, Bahrain, Bangladesh, Belgium, Brunei, Canary Islands, Cyprus, Denmark, Egypt, Finland, Germany, Ghana, Gibraltar, Greece, Iceland, India, Indonesia, Iran, Iraq, Italy, Jordan, Kenya, Republic of Korea, Kuwait, Lebanon, Liberia, Libya, Luxemburg, Malaysia, Malta, Mauritania, Mauritius, Maldives Rep., Morocco, Mozambique, Nepal, Netherlands, New Zealand, Nicaragua, Nigeria, Norway, Oman, Pakistan, Portugal, Qatar, Sarawak, Saudi Arabia, Seychelles, Sierra Leone, Singapore, Spain, Srilanka, Sudan, Swaziland, Sweden, Switzerland, Syrian Arab Rep., Tanzania, Thailand, Tunisia, Turkey, Uganda, United Arab Emirates, Western Sahara, Yemen Arab Republic, People's Dem. Rep. of Yemen, Yugoslavia, Zambia, Zimbabwe

AUSTRALIA
Australia, New Zealand

HK/UK
Hong kong, Ireland, Lesotho, South Africa, United Kingdom

CHINA/E EURO
Benin, Bulgaria, China, Congo, Czechoslovakia, Djibouti Republic, Gabon, Guadeloupe, Guiana, Guinea (P.P.R.), Hungary, Ivory Coast, Dem. People's Rep. of Korea, Madagascar, Mongolia, New Caledonia, Niger, Poland, Reunion, Rumania, Senegal, Tahiti, Togo, Former U.S.S.R., Vietnam, Zaire

AMERICA/CATV AMERICA
Bahama Islands, Barbados, Belize, Bermuda, Bolivia, Burma (UHF), Canada, Chile, Colombia, Costa Rica, Cuba, Dominica Republic, Ecuador, El Salvador, Guam, Guatemala, Haiti, Hawaii, Honduras, Jamaica, Laos, Mexico, Panama, Peru, Philippines, Puerto Rico, Surinam, Taiwan, Trinidad & Tobago, U.S.A., U.S.A. (CATV), Venezuela

JAPAN
Burma (Myanmar) (VHF), Japan (VHF, UHF)

TV and color systems of each channel system

The TV system and color system are automatically set according to the channel system.

Channel system	TV system	Color system
M E/ASIA/ CATV W EURO	B/G, H: West European TV standard	AUTO
AUSTRALIA	B/G, H: Australian TV standard	AUTO
HK/UK	I: British TV standard	AUTO
CHINA/E EURO	D/K: East European TV standard	AUTO
AMERICA/CATV AMERICA	M: American TV standard	AUTO
JAPAN	M: Japan TV standard	AUTO

SECTION 2
DISASSEMBLY

2-1. REAR COVER REMOVAL

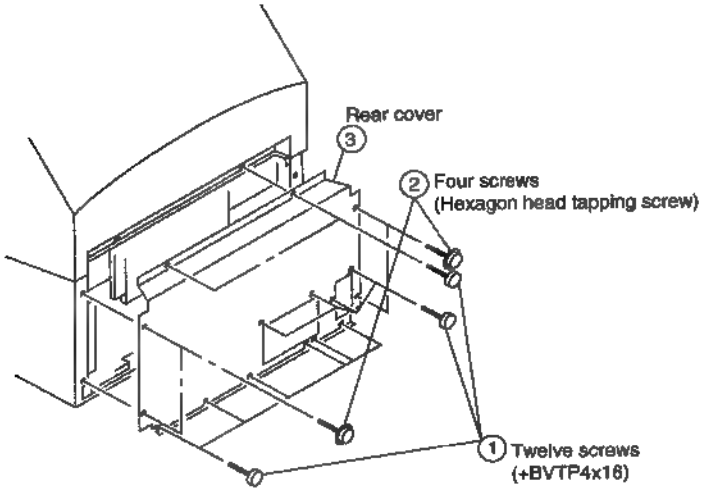

2-2. CHASSIS ASSY REMOVAL

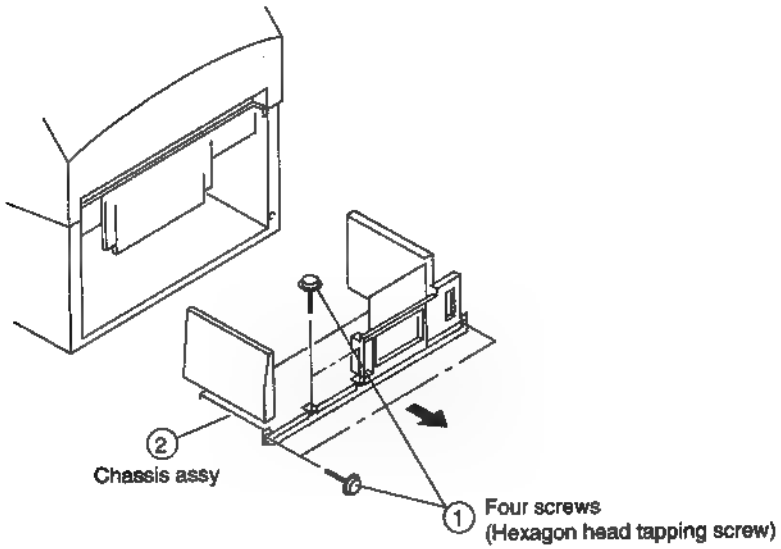

2-3. SERVICE POSITION

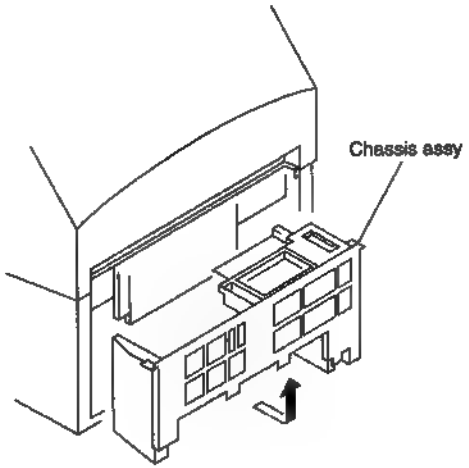

2-4. G BOARD REMOVAL

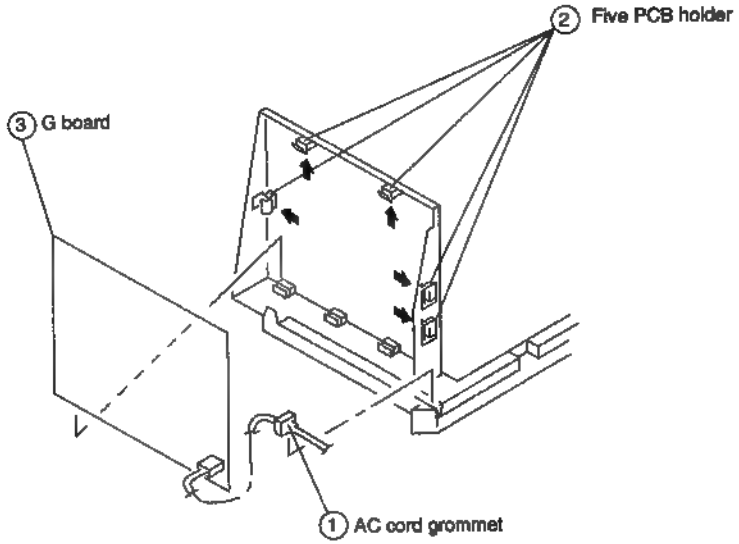

2-5. U BOARD REMOVAL

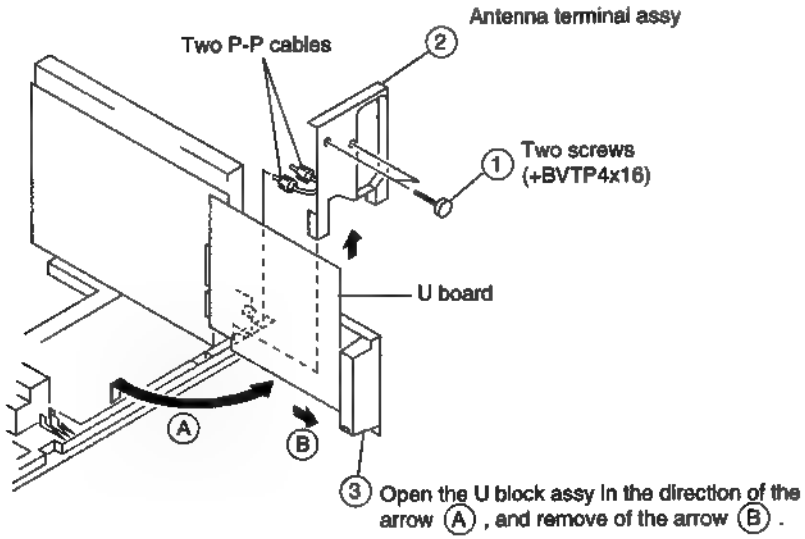

2-6. B BOARD REMOVAL

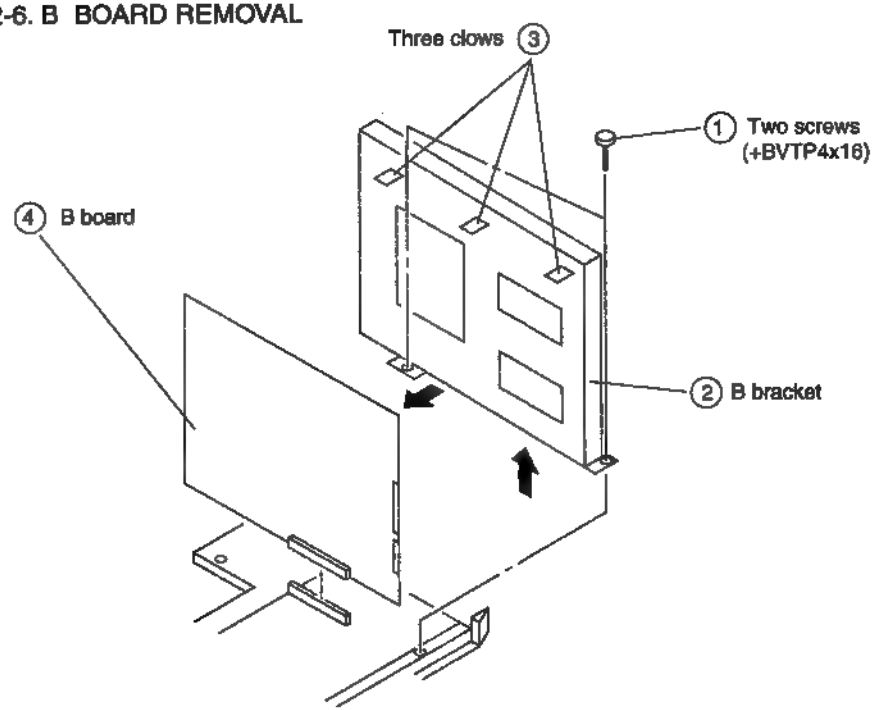

2-7. HA AND HB BOARDS REMOVAL

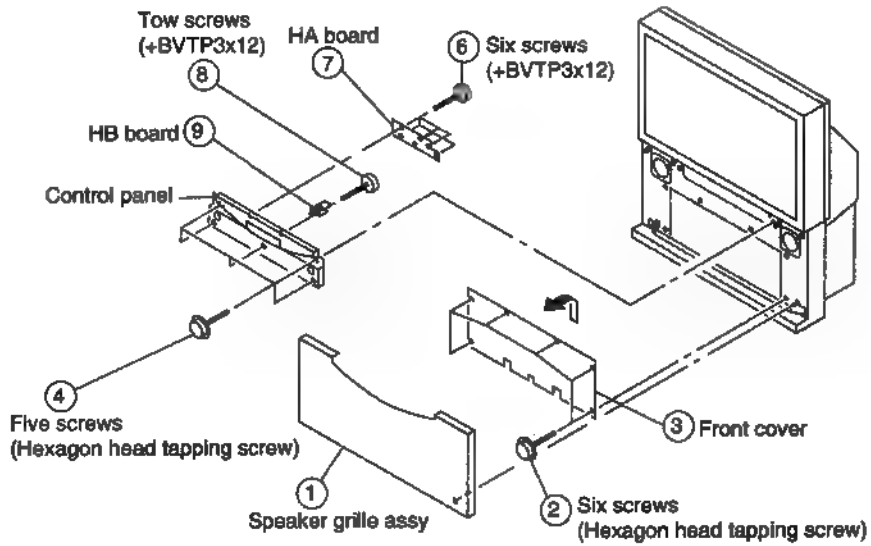

2-8. BEZNET ASSY REMOVAL

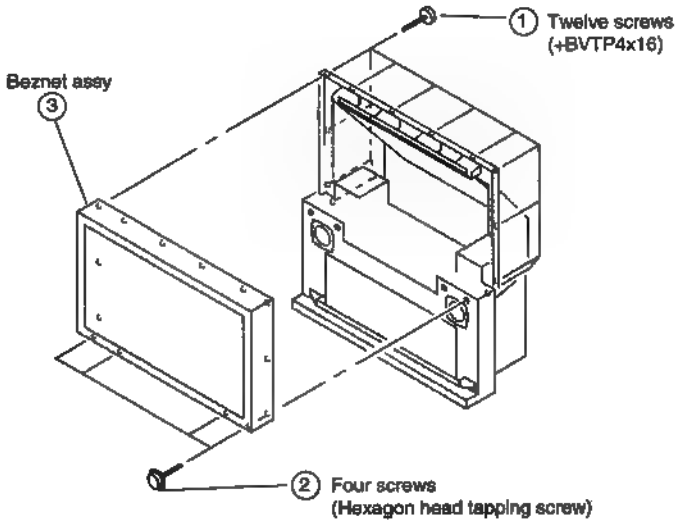

2-9. MIRRER COVER ASSY REMOVAL

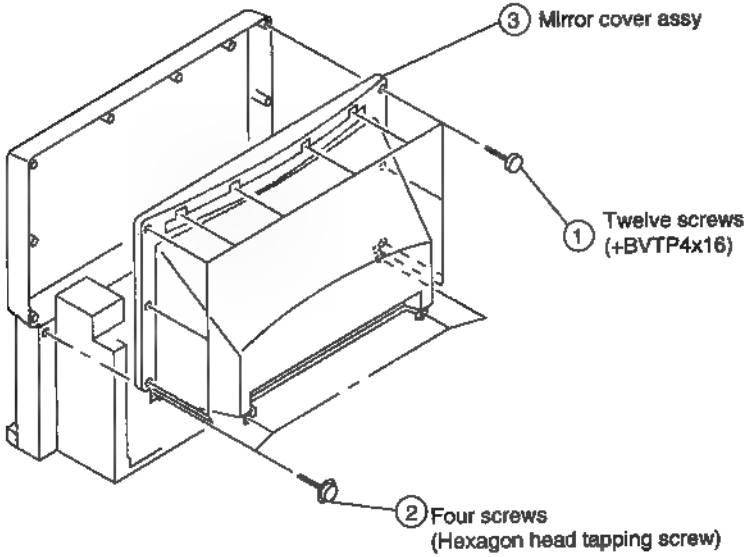

2-10. HIGH-VOLTAGE CABLE INSTALLATION

(1) Remover



(2) Installation

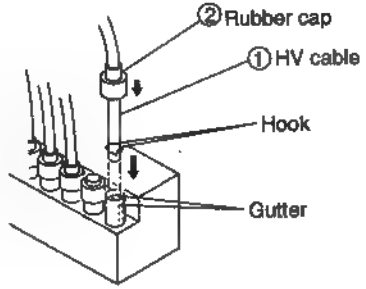

2-11. PICTURE TUBE REMOVAL

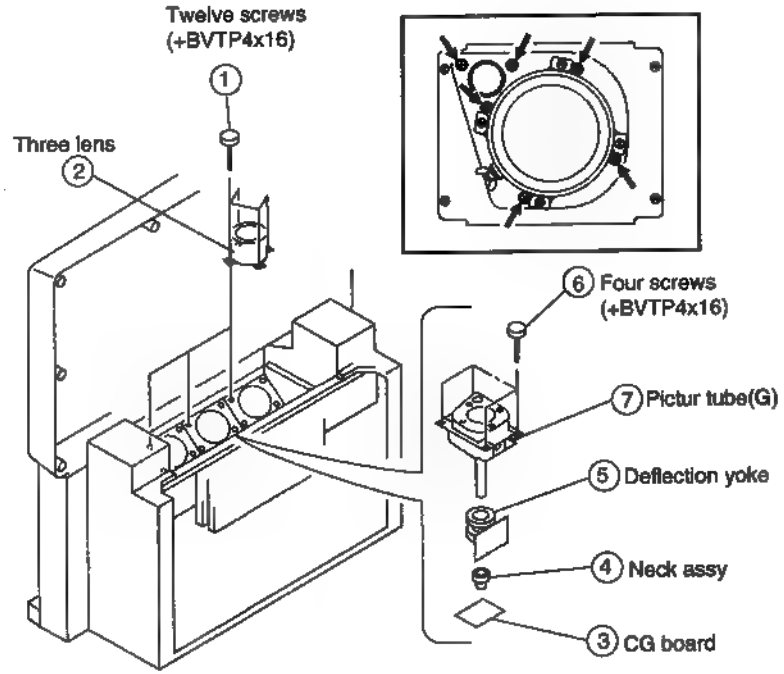

SECTION 3
SET-UP ADJUSTMENTS

ADJUSTMENT ITEM AND PROCEDURE	EQUIPMENT AND SIGNAL	MEASUREMENT POSITION	ADJUSTMENT LOCATION	ILLUSTRATION AND SHAPE AND NUMBER
SCREEN VOLTAGE ADJUSTMENT (ROUGH AIIGNMENT) 1. Turn the red VR on the FOCUS block all the way to the left and then gradually turn it to the right until the point where you can see the retrace line. 2. Next gradually turn it to the left to the position where the retrace line disappears. **FOCUS LENS ADJUSTMENT** 1. Loose the lens screw. 2. Set in service mode. 3. Use VSP on the service mode menu to shown only the green color. 4. Press the Commander Menu button and select FEATURES and CONVERGENCE to display the test signal on the screen. 5. Rotate the green lens and align with the optimal focus point from the test signal. 6. Use RRH from the service mode menu to set to green and red. 7. Output the test signal and rotate the red lens to obtain the optimum focus at the point where the red and green spots overlap. 8. Use RBH from the service mode menu to set to red and blue. 9. Output the test signal and rotate the blue lens to obtain the optimum focus at the point where the blue and red spots overlap. 10. Tighten the lens screw. **SCREEN ADJUSTMENT(G2)** 1. Select VIDEO mode without signals. 2. Connect an oscilloscope to the TP7103(KR), TP7203(KG) and TP7303(KB) of CR board, CG board and CB board. 3. Adjust R. G.and B screen voltage to 175VDC with screen VR on the focusblock.	Monoscope Pattern		PICTURE ..... minimum BRIGHTNESS ..... 50% SCREEN (G2)	 FOCUS block  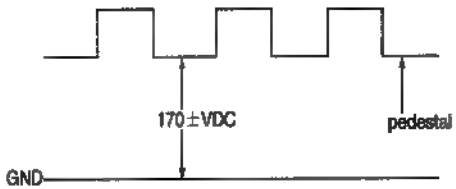

ADJUSTMENT ITEM AND PROCEDURE	EQUIPMENT AND SIGNAL	MEASUREMENT POSITION	ADJUSTMENT LOCATION	ILLUSTRATION AND SHAPE AND NUMBER
FOCUS VR ADJUSTMENT 1. Set in service mode. 2. Use VSP on the service mode menu to shown only the green color. 3. Press the Commander Menu button and output the test signal. 4. Rotate the green VR on the FOCUS block and align to obtain the optimal focus point. 5. Use RRH from the service mode menu to set to green and red. 6. Output the test signal and rotate the red VR to obtain the optimum focus at the point where the red and green spots overlap. 7. Use RBH from the service mode menu to set to red and blue. 8. Output the test signal and rotate the blue VR aligning to obtain the optimum focus at the point where the blue and red spots overlap.				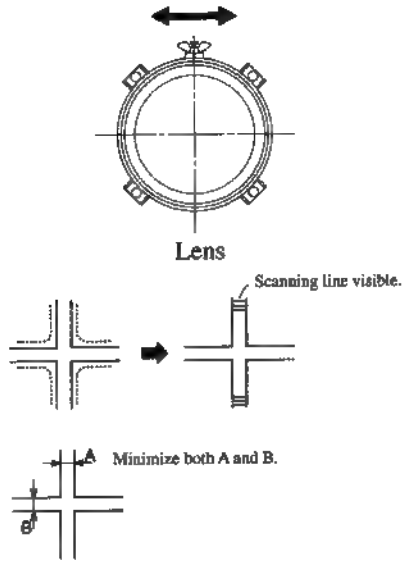
DEFLECTION YOKE TILT ADJUSTMENT 1. Set in service mode. 2. Set to receive the monoscope signal. 3. Use VSP on the service mode menu to shown only the green color. 4. Loosen the deflection yoke setscrew and align the tilt of the Deflection Yoke so that the bars at the center of the monoscope pattern are horizontal. 5. After aligning the deflection yoke, fasten it securely to the funnel-shaped portion (neck) of the CRT. 6. The tilt of the deflection yoke for red is aligned with RRH on the service mode menu, and the tilt on the deflection yoke for green is aligned with RBH on the service menu, is aligned the same as was done for green.	Monoscope pattern			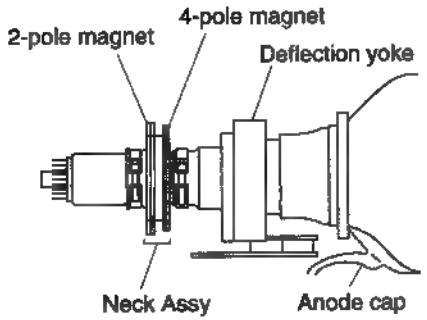

ADJUSTMENT ITEM AND PROCEDURE	EQUIPMENT AND SIGNAL	MEASUREMENT POSITION	ADJUSTMENT LOCATION	ILLUSTRATION AND SHAPE AND NUMBER
2-POLE MAGNET ADJUSTMENT 1. Set in service mode. 2. Set to receive the dot pattern signal. 3. Place the caps on the red and blue lens so that only the green color is shown. 4. Turn the green VR on the focus block to the right and set to overfocus to enlarge the spot. 5. Now align the 2-Pole Magnet so that the enlarged spot is in the center of the Just Focus spot. 6. Align the green focus VR and set for just (precise) focus. 7. Perform the same alignment for red and blue.	Dot pattern		2-pole magnet	Use the center dot 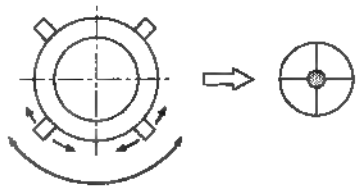
4-POLE MAGNET ADJUSTMENT 1. Set in service mode. 2. Set to receive the dot pattern signal. 3. Place the caps on the red and blue lens so that only the green color is shown. 4. Turn the green VR on the focus block to the left and set to underfocus to enlarge the spot. 5. Now align the 4-Pole Magnet so that the enlarged spot becomes a perfect circle.	Dot pattern		4-pole magnet	Use the center dot 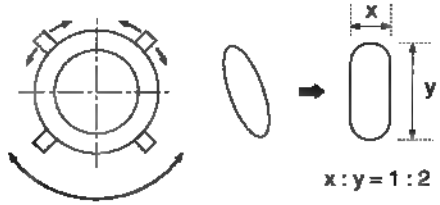

ADJUSTMENT ITEM AND PROCEDURE	EQUIPMENT AND SIGNAL	MEASUREMENT POSITION	ADJUSTMENT LOCATION	ILLUSTRATION AND SHAPE AND NUMBER
DEFOCUS ADJUSTMENT 1. Receive the signal. 2. Adjust the FOCUS knob so that the crosshatch pattern vertical line width is as in the figure on the right.	Crosshatch pattern		FOCUS VR • RED • GREEN • BLUE	• Focus adjustment point 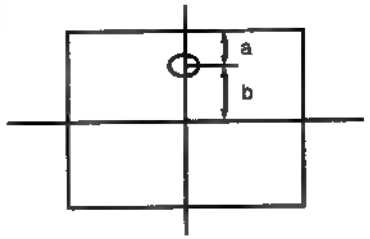 a:b=1:4  without flare

ELECTRICAL ADJUSTMENT BY REMOTE COMMANDER

Use of Remote Commander (RM-Y890) can be performed circuit adjustments about this model.

NOTE : Test Equipment Required.

1. Pattern Generator
2. Frequency counter
3. Digital multimeter
4. Audio oscillator

1. METHOD OF SETTING THE SERVICE ADJUSTMENT MODE

SERVICE MODE PROCEDURE

1. Standby mode. (Power off)
2. DISPLAY → 5 → VOL (+) → POWER on the Remote Commander. (Press each button within a second.)

SERVICE ADJUSTMENT MODE IN

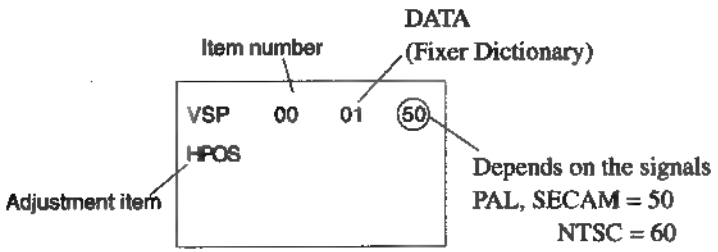

3. The CRT displays the item Being adjusted.
4. Press 1 or 4 on the Remote Commander to select the item.
5. Press 3 or 6 on the Remote Commander to change the data.
6. If you want to recover the latest values press 0 then ENTER to lead the memory.
7. Press MUTING then ENTER to write into memory.

SERVICE ADJUSTMENT MODE MEMORY



MUTING Green
↓
ENTER Red

8. Press 8 then ENTER on the Remote Commander to initlalize.

Carry out step 8) when adjusting IDs 0 to 4 and when replacing and adjusting IC003/005.

Factory original setting

9. Turn set off and on to exit.

2. MEMORY WRITE CONFIRMATION METHOD

1. After adjustment, pull out the plug from AC outlet, and next place, plug in AC outlet again.
2. Turn the power switch ON and set to Service Mode.
3. Call the adjusted items again, confirm they were adjusted.

3. ADJUST BUTTONS AND INDICATOR

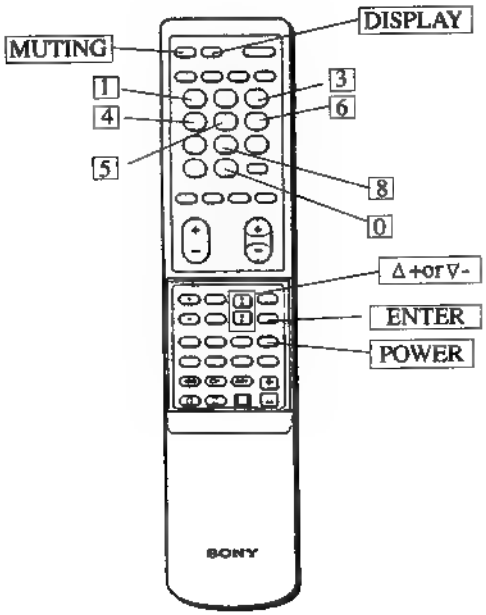

RM-890

4. SERVICE MODE LIST

VSP

SCREEN MODE WZ : WIDE ZOOM, F / N : FULL / NORMAL, Z / ST : ZOOM / SUB TILT

	Item number	Adjustment item	Data range	Initial data WZ	F/N	Z/ST	Note	Device
VSP	00	HPOS	0 ~ 63	30	30	30	H-SHIFT	CXD2018Q
	01	VSIZ	0 ~ 63	35	32	32	V-SIZE	(V DSP)
	02	VPOS	0 ~ 63	17	17	17	V-SHIFT	
	03	VSCO	0 ~ 15	▮	7	7	S-CORRECTION	
	04	VLIN	0 ~ 15	12	10	10	V-LIN	
	05	HSIZ	0 ~ 63	40	30	30	H-SIZE	
	06	HPIN	0 ~ 63	23	27	27	PIN-AMP	
	07	HKEY	0 ~ 31	17	17	17	TILT(TILT)	
	08	UPCP	0 ~ 15	6	6	6	UP-COR-PIN	
	09	LOCP	0 ~ 15	6	9	9	LOW-COR-PIN	
	10	HBOW	0 ~ 15	8	8	8	V-BOW	
	11	HSKE	0 ~ 15	8	8	8	V-ANGLE	

DP

SCREEN MODE WZ : WIDE ZOOM, F / ▮ : FULL / NORMAL, Z / ST : ZOOM / SUB TILT

	Item number	Adjustment item	Data range	Initial data WZ	F/N	Z/ST	Note	Device
R GH	00	CENT	–127 ~ +127	0	0	0	SUB G. H CENTER	CXP85112
	01	SKEW	–127 ~ +127	0	0	0	SUB G. H SKEW	(REGI μCOM)
	02	BOW	–127 ~ +127	▮	0	0	SUB G. H BOW	
	03	4 BOW	–127 ~ +127	▮	0	▮	SUB G. H 4th BOW	
	04	SIZE	–127 ~ +127	0	0	▮	SUB G. H SIZE	
	05	LIN	–127 ~ +127	5	0	0	SUB G. H LINEARITY	
	06	M SIZ	–127 ~ +127	-45	0	0	SUB G. H MID SIZE	
	07	M LIN	–127 ~ +127	0	0	0	SUB G. H MID LINEARITY	
	08	KEY	–127 ~ +127	0	0	0	SUB G. H KEYSTONE	
	09	SSKW	–127 ~ +127	0	▮	0	SUB G. H SUB SKEW	
	10	M PIN	–127 ~ +127	0	0	0	SUB G. H MID PINCUSHION	
	11	PIN	–127 ~ +127	0	0	0	SUB G. H PINCUSHION	
	12	S BOW	–127 ~ +127	0	0	0	SUB G. H SUB BOW	
	13	M BOW	–127 ~ +127	0	0	▮	SUB G. H MID BOW	
	14	4PIN	–127 ~ +127	0	–40	–40	SUB G. H 4th PINCUSHION	
	15	4 SBO	–127 ~ +127	0	0	0	SUB G. H 4th SUB BOW	
R GV	00	CENT	–127 ~ +127	0	0	0	SUB G. V CENTER	
	▮1	SKEW	–127 ~ +127	0	0	0	SUB G. V SKEW	
	02	BOW	–127 ~ +127	3	3	3	SUB G. V BOW	
	03	SIZE	–127 ~ +127	0	0	0	SUB G. V SIZE	
	04	LIN	–127 ~ +127	0	0	▮	SUB G. V LINEARITY	
	05	M SIZ	–127 ~ +127	▮	0	▮	SUB G. V MID SIZE	
	06	M KEY	–127 ~ +127	0	0	0	SUB G. MID KEYSTONE	
	07	KEY	–127 ~ +127	10	10	10	SUB G. V KEYSTONE	
	08	S SKW	–127 ~ +127	0	0	▮	SUB G. V SUB SKEW	
	09	M PIN	–127 ~ +127	15	10	10	SUB G. V MID PINCUSHION	
	10	PIN	–127 ~ +127	– 15	– 10	– 10	SUB G. V PINCUSHION	
	11	S BOW	–127 ~ +127	0	0	0	SUB G. V SUB BOW	
	12	WAVE	–127 ~ +127	0	0	0	SUB G. V 3th WAVE	
	13	4PIN	–127 ~ +127	– 15	0	0	SUB G. V 4th PINCUSHION	
R RH	00	CENT	–63 ~ +63	0	0	0	SUB R. H CENTER	
	01	SKEW	–127 ~ +127	0	0	0	SUB R. H SKEW	
	02	BOW	–127 ~ +127	0	0	0	SUB R. H BOW	
	03	4BOW	–127 ~ +127	0	0	0	SUB R. H 4th BOW	
	04	SIZE	–127 ~ +127	0	0	0	SUB R. H SIZE	
	05	LIN	–127 ~ +127	5	0	0	SUB R. H LINEARITY	
	06	MSIZ	–127 ~ +127	– 40	0	0	SUB R. H MID SIZE	
	07	MLIN	–127 ~ +127	5	0	0	SUB R. H MID LINEARTIY	
	08	KEY	–127 ~ +127	0	0	0	SUB R. H KEYSTONE	
	09	SSKW	–127 ~ +127	0	0	▮	SUB R. H SUB SKEW	
	10	MPIN	–127 ~ +127	10	5	5	SUB R. H MID PINCUSHON	

	Item number	Adjustment item	Data range	Initial data WZ	F/N	Z/ST	Note	Device
R GH	11	PIN	–127 ~ +127	0	5	5	SUB R. H PINCUSHON	CXP85112 (REGI μCOM)
	12	SBOW	–127 ~ +127	45	45	45	SUB R. H SUB BOW	
	13	MBOW	–127 ~ +127	0	0	0	SUB R. H MID BOW	
	14	4PIN	–127 ~ +127	0	–4	–4	SUB R. H 4th PINCUSHON	
	15	4SBO	–127 ~ +127	0	[illegible]	0	SUB R. H 4th SUB BOW	
R RV	00	CENT	–63 ~ +63	30	30	30	SUB R. V CENTER	
	01	SKEW	–127 ~ +127	0	0	[illegible]	SUB R. V SKEW	
	02	BOW	–127 ~ +127	3	3	3	SUB R. V BOW	
	03	SIZE	–127 ~ +127	–10	–10	–10	SUB R. V SIZE	
	04	LIN	–127 ~ +127	0	[illegible]	[illegible]	SUB R. V LINEARITY	
	05	MSIZ	–127 ~ +127	7	0	0	SUB R. V MID SIZE	
	06	MKEY	–127 ~ +127	8	8	8	SUB R. V MID KEYSTONE	
	07	KEY	–127 ~ +127	–15	–15	–15	SUB R. V KEYSTONE	
	08	SSKW	–127 ~ +127	0	0	0	SUB R. V SUB SKEW	
	09	MPIN	–127 ~ +127	15	10	10	SUB R. V MID PINCUSHON	
	10	PIN	–127 ~ +127	15	–5	–5	SUB R. V PINCUSHON	
	11	SBOW	–127 ~ +127	0	0	0	SUB R. V SUB BOW	
	12	WAVE	–127 ~ +127	0	0	0	SUB R. V 3th WAVE	
	13	4PIN	–127 ~ +127	–15	0	0	SUB R. V 4th PINCUSHON	
R BH	00	BSEL	0 ~ 1	0	0	0	0 : R – MUTE 1 : G – MUTE	
	01	CENT	–63 ~ +63	0	0	[illegible]	SUB B. H CENTER	
	02	SKEW	–127 ~ +127	0	0	0	SUB B. H SKEW	
	03	BOW	–127 ~ +127	0	0	0	SUB B. H BOW	
	04	4BOW	–127 ~ +127	0	0	0	SUB B. H 4th BOW	
	05	SIZE	–127 ~ +127	0	0	0	SUB B. H SIZE	
	06	LIN	–127 ~ +127	5	[illegible]	0	SUB B. H LINEARITY	
	07	MSIZ	–127 ~ +127	–40	0	0	SUB B. H MID SIZE	
	08	MLIN	–127 ~ +127	–5	0	0	SUB B. H MID LINEARITY	
	09	KEY	–127 ~ +127	0	0	0	SUB B. H KEYSTONE	
	10	SSKW	–127 ~ +127	0	0	0	SUB B. H SUB SKEW	
	11	MPIN	–127 ~ +127	[illegible]	5	5	SUB B. H MID PINCUSHON	
	12	PIN	–127 ~ +127	0	5	5	SUB B. H PINCUSHON	
	13	SBOW	–127 ~ +127	–45	–45	–45	SUB B. H SUB BOW	
	14	MBOW	–127 ~ +127	0	0	0	SUB B. H MID BOW	
	15	4PIN	–127 ~ +127	0	–4	–4	SUB B. H 4th PINCUSHON	
	16	4SBO	–127 ~ +127	0	0	0	SUB B. H 4th SUB BOW	
R BV	00	CENT	–63 ~ +63	30	30	30	SUB B. V CENTER	
	01	SKEW	–127 ~ +127	[illegible]	0	0	SUB B. V SKEW	
	02	BOW	–127 ~ +127	3	3	3	SUB B. V BOW	
	03	SIZE	–127 ~ +127	–10	–10	–10	SUB B. V SIZE	
	04	LIN	–127 ~ +127	[illegible]	0	0	SUB B. V LINEARITY	
	05	MSIZ	–127 ~ +127	7	0	0	SUB B. V MID SIZE	
	06	MKEY	–127 ~ +127	–8	–8	–8	SUB B. V MID KEYSTONE	
	07	KEY	–127 ~ +127	5	5	5	SUB B. V KEYSTONE	
	08	SSKW	–127 ~ +127	0	0	0	SUB B. V SUB SKEW	
	09	MPIN	–127 ~ +127	15	0	0	SUB B. V MID PINCUSHON	
	10	PIN	–127 ~ +127	–10	–30	–30	SUB B. V PINCUSHON	
	11	SBOW	–127 ~ +127	0	0	0	SUB B. V SUB BOW	
	12	WAVE	–127 ~ +127	0	0	0	SUB B. V 3th WAVE	
	13	4PIN	–127 ~ +127	–15	0	0	SUB B. V 4th PINCUSHON	

D/A

	Item number	Adjustment item	Data range	Initial data	Note	Device
D / A	00	BKU	0 ~ 63	50	BLK UP-SIDE	CXA1315M
	01	BKD	0 ~ 63	10	BLK DOWN-SIDE	

MCD

	Item number	Adjustment item	Data range	Initial data	Note	Device
MCD	00	MHUE	0 ~ 31	15	Main NTSC Hue for main picture (Off Set)	TDA9141 (Main CHROMA DECODER)

SCD

	Item number	Adjustment item	Data range	Initial data	Note	Device
SCD	00	SHUE	0 ~ 31	15	Sub NTSC Hue for main picture (Off Set)	TDA9160A (SUB CHROMA DECODER)

AP

	Item number	Adjustment item	Data range	Initial data	Note	Device
AP	00	FAW	0 ~ 255	[illegible]	NICAM FAW THRESH	MSP3410 (AUDIO PROS / STEREO DECODER)
	01	CTM	0 ~ 255	8	ERROR BIT MONO	
	02	CTN	0 ~ 255	80	ERROR BIT NICAM	
	03	WGO	0 ~ 255	[illegible]	DIFFERENCE (W / G)	
	04	WGS	0 ~ 255	21	DECISION POINT (STEREO W / G)	
	05	WGT	0 ~ 255	80	TIMER (W / G)	
	06	WGB	0 ~ 255	234	W, G, CONST	
	07	ACG	0 ~ 1	1	AGC AUTO / CONST	
	08	CDB	0 ~ 127	40	AGC GAIN / CONST	
	09	FMP	0 ~ 127	34	FM MONO PRESCALE	
	10	WGP	0 ~ 127	60	W, G, PRESCALE	
	11	NIP	0 ~ 127	127	NICAM PRESCALE	
	12	CRM	0 ~ 1	[illegible]	CARRIA MUTE	
	13	ACO	0 ~ 1	1	AUDIO CLOCK OUT	
	14	WAC	0 ~ 1	1	W / G JUDGEMENT	

PIP

	Item number	Adjustment item	Data range	Initial data	Note	Device
PIP	00	RDV	0 – 15	5	V READ DELAY (OFF SET TO EACH POSITION)	SDA9188 (P I N P PROCESSOR)
	01	RDH	0 ~ 63	17	H READ DELAY (OFF SET TO EACH POSITION)	
	02	FRY	0 – 15	4	FRAME BRIGHTNESS	
	03	9V50	0 ~ 7	3	MULTI PIP V 50Hz	
	04	9H50	0 ~ 7	3	MULTI PIP V 50Hz	
	05	9V60	0 ~ 7	3	MULTI PIP V 60Hz	
	06	9H60	0 ~ 7	3	MULTI PIP V 60Hz	
	07	SCON	0 ~ 15	8	PIP SUB CONTRAST	

IPQ

	Item number	Adjustment item	Data range	Initial data	Note	Device
IPQ	00	CIN	0 ~ 1	0	CINE MODE 0 : OFF, 1 : ON	83C652 (FIELD DOBLE / ASPECT CONV)
	01	107	0 ~ 1	1	SET TMS4C1070	
	02	LFR	0 ~ 1	1	LINE FLICKER REDUCTION 0 : OFF, 1 : ON	
	03	HWE	0 ~ 15	13	H PISITION (ADJUSTMENT AT NORMAL MODE)	
	04	NR	0 ~ 3	2	NOISE REDUCTION LEVEL	
	05	Y-V	0 – 127	80	Y LEVEL FOR BACKGROUND	
	06	UV-V	0 ~ 127	0	UV LEVEL FOR BACKGROUND	
	07	PEAK	0 – 127	8	PEAKING LEVEL	
	08	CTI	0 ~ 127	64	CTI LEVEL	
	09	VWE	0 ~ 63	26	VWE1 DELAY	
	10	2BLO		0		
	11	BOXP		0		

CPU

	Item number	Adjustment item	Data range	Initial data	Note	Device
CPU	00	OSH	0 – 63	23	OSD POSITION H	CXP5400 (SYS, µCOM)
	01	ODL	0 – 255	15	POWER ON DELAY	
	02	WIDE	0 ~ 1	1	RELAY FOR WIDE MODEL 0 : 4 : 3 1 : 16 : 9	
	03	TWIN	0 ~ 1	1	0 : Sub V FIELD PROCESSING 1 : Sub V FRAM PROCESSING	
	04	DSPC	0 ~ 1	1	0 : ENABLE RECEIVE OF CHANNEL IDENTICAL TO TWIN PICTURE 1 : DISABLE RECEIVE OF CHANNEL IDENTICAL TO TWIN PICTURE	

TXT

	Item number	Adjustment item	Data range	Initial data	Note	Device
TXT	00	TXH	0 ~ 255	10	TEXT H POSITION	TPU3040 (TEXT PROCESSOR)
	01	TXV	0 – 127	46	TEXT V POSITION	
	02	VSP	0 ~ 255	59	WST LAYER V STOP	
	03	BSP	0 ~ 255	61	BLANKING STOP	
	04	BST	0 ~ 255	53	BLANKING START	
	05	QSF	0 – 31	1	ACQ SOFT SLICER	
	06	A7F	0 ~ 63	10	ADD 7FH DATA	
	07	QDT	0 ~ 63	13	ACQ DATA SLICER	
	08	CST	0 ~ 127	0	CLAMPING START	
	09	CSP	0 ~ 255	80	CLAMPING STOP	
	10	LMT	0 ~ 1	0	LIMIT SLICER ADAPT	
	11	GMX	0 ~ 255	31	GAIN MAX	
	12	FMX	0 ~ 255	31	FILTER MAX	
	13	TVER	0 ~	3	TEXT VERSION	
	14	VSP	0 – 255	59	WST LAYER V STOP	

RGB

	Item number	Adjustment item	Data range	Initial data	Note	Device
RGB	00	SCOL	0 ~ 63	31	SUB COLOR (OFF SET)	TDA4780 (RGB VIDEO PROCESSOR)
	01	SBRT	0 ~ 63	31	SUB BRUGHT (OFF SET)	
	02	RAMP	0 ~ 63	31	RED GAIN FOR WHITE BALANCE	
	03	GAMP	0 ~ 63	31	GREEN GAIN FOR WHITE BALANCE	
	04	BAMP	0 ~ 63	48	BLUE GAIN FOR WHITE BALANCE	
	05	RCUT	0 ~ 63	31	RED CUT OFF FOR WHITE BALANCE	
	06	GCUT	0 ~ 63	31	GREEN CUT OFF FOR WHITE BALANCE	
	07	BCUT	0 ~ 63	48	BLUE CUT OFF FOR WHITE BALANCE	
	08	PDL	0 ~ 63	20	PEAK DRIVE LIMITER LEVEL	
	09	GNMA	0 ~ 63	20	GANMA	
	10	AFBL	0 ~ 1	0	ACTIVE BLACK 0 : OFF, 1 : ON	
	11	RELC	0 ~ 1	1	RELATIVE C/O	
	12	TCPL	0 ~ 1	1	TIME CONST PEAK LIMITER 0 : 2fH, 1 : 1fH	
	13	AXIS	0 – 1	1	NTSC AXISAL	

ADJUSTMENT ITEM AND PROCEDURE	EQUIPMENT AND SIGNAL	MEASUREMENT POSITION	ADJUSTMENT LOCATION	ILLUSTRATION AND SHAPE AND NUMBER

CONVERGENCE ADJUSTMENT

- When replacing the deflection yoke, always perform "DEFLECTION YOKE TILT ADJUSTMENT" before adjusting the convergence.
- Adjustments should be proceeded individually per mode : "FULL MODE", "ZOOM MODE", and "WIDE ZOOM".

"FULL" ..... "FULL" and "NORMAL" modes data
"ZOOM" ..... "ZOOM" and "CHARACTER" modes data
"WIDE ZOOM" ..... "WIDE ZOOM"mode data

1. To copy the data from "FULL MODE" to "ZOOM MODE", press [2] and [0] on the remote commander.
2. After the adjustment, write the data in memory by pressing [MUTING] and [0] on the remote commander.
3. For the data copy between 50 and 60Hz, press [DISPLAY] and [0] on the commander.

Adjustment procedure



ADJUSTMENT ITEM AND PROCEDURE	EQUIPMENT AND SIGNAL	MEASUREMENT POSITION	ADJUSTMENT LOCATION	ILLUSTRATION AND SHAPE AND NUMBER
[FULL MODE ADJUSTMENT] **CONVERGENCE MAIN ADJUSTMENT** Receive the signal and set at "FULLMODE", select the adjustment item in service mode. **• GREEN REGISTRATION ADJUSTMENT** • V-SHIFT adjustment	Monoscope pattern or Crosshatch pattern		<VSP MENU> VPOS (02)	VPOS
• V-LINEARITY adjustment			VLIN (04)	VLIN
• V-SIZE, V-CORRECTION adjustment While tracking, adjust so that the lattice intervals for V-SIZE and VSCO are equal.			VSIZ (01) VSCO (03)	VSIZ  VSCO
• H-SHIFT adjustment			HPOS (00)	HPOS
• H-SIZE adjustment Finely adjust with SUB MSIZE.			HSIZE (05)	HSIZE 
• PIN-AMP adjustment Finely adjust with SUB MPIN.			HPIN (06)	HPIN

ADJUSTMENT ITEM AND PROCEDURE	EQUIPMENT AND SIGNAL	MEASUREMENT POSITION	ADJUSTMENT LOCATION	ILLUSTRATION AND SHAPE AND NUMBER
• UPPER/LOWER-CORNER PIN adjustment Correct the screen top and bottom section line bow. However, if this adjustment is overdone, distortion may occur with the PIN-AMP adjustment that can not be adjusted away. Note : The PIN-AMP adjustment adjusts the overall screen from top to bottom, but the UPPER/LOWER-CORNER PIN adjustments have just large movement in the top and bottom sections, so be careful.			UPCP (08) LOCP (09)	UPCP LOCP
• V-ANGLE, V-BOW adjustment Correct the tilt and bow of the vertical line at the center of the screen.			HSKE (11) HBOW (10)	HSKE  HBOW
• TILT adjustment Adjust to eliminate the tilt of one of the two vertical lines at both ends of the screen.			HKEY (07)	HKEY 

ADJUSTMENT ITEM AND PROCEDURE	EQUIPMENT AND SIGNAL	MEASUREMENT POSITION	ADJUSTMENT LOCATION	ILLUSTRATION AND SHAPE AND NUMBER

CONVERGENCE SUB ADJUSTMENT

Adjustment O : Yes – : No

Display	Adjustment item	Adjustment type					
		RGH	RGV	RRH	RRV	RBH	RBV
BSEL	COL SELECT	–	–	–	–	O	–
CENT	CENT	O	O	O	O	O	O
SKEW	SKEW	O	O	O	O	O	O
BOW	BOW	O	O	O	O	O	O
4BOW	4TH BOW	O	–	O	–	O	–
SIZE	SIZE	O	O	O	O	O	O
LIN	LIN	O	O	O	O	O	O
MSIZ	MID SIZE	O	O	O	O	O	O
MLIN	MID LIN	O	O	O	–	O	–
MKEY	MID KEY	–	O	–	O	–	O
KEY	KEY	O	O	O	O	O	O
SSKW	SUB SKEW	O	O	O	O	O	O
M PIN	MID PIN	O	O	O	O	O	O
PIN	PIN	O	O	O	O	O	O
SBOW	SUB BOW	O	O	O	O	O	O
WAVE	WAVE	–	O	–	O	–	O
MBOW	MID BOW	O	–	O	–	O	–
4PIN	4TH PIN	O	O	O	O	O	O
4SBOW	4TH SUB BOW	O	–	O	–	O	–

ADJUSTMENT ITEM AND PROCEDURE	EQUIPMENT AND SIGNAL	MEASUREMENT POSITION	ADJUSTMENT LOCATION	ILLUSTRATION AND SHAPE AND NUMBER
• GREEN SUB ADJUSTMENT **SCREEN CENTER SECTION GREEN VERTICAL LINE** **ADJUSTMENT** 1. Finely adjust with RGH CENT, RGH BOW, RGH SKEW. Adjust watching out for the RGH CENT screen center section.			<RGH MENU> RGH CENT (00) RGH BOW (02) RGH SKEW (01)	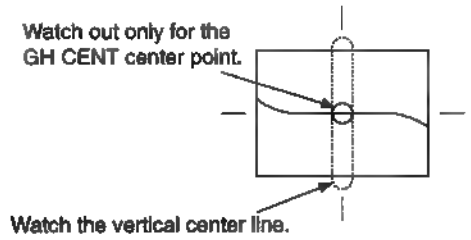 RGH CENT RGH BOW RGH SKEW
2. RGH 4TH BOW adjustment Correct the corner distortion that could not be adjusted away with the RGH BOW adjustment.			RGH 4BOW (03)	RGH 4BOW

ADJUSTMENT ITEM AND PROCEDURE	EQUIPMENT AND SIGNAL	MEASUREMENT POSITION	ADJUSTMENT LOCATION	ILLUSTRATION AND SHAPE AND NUMBER
SCREEN CENTER SECTION GREEN HORIZONTAL LINE ADJUSTMENT 1. Finely adjust the center position of the vertical line at the center of the screen with RGV CENT.			<RGV MENU> RGV CENT (00)	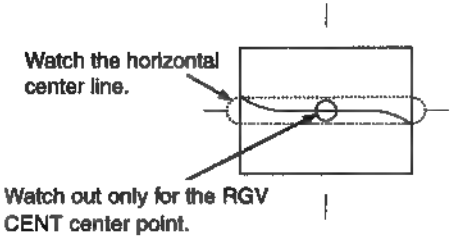 RGV CENT
2. Correct the tilt and bow of the horizontal line at the center of the screen with RGV SKEW and RGV BOW.			RGV SKEW (01) RGV BOW (02)	RGV SKEW  RGV BOW
GREEN SIZE AND LINEARITY ADJUSTMENT 1. Balance the sizes at both sides of the center section of the screen with RGH MLIN. 2. Balance the sizes on both end sections of the screen with RGH LIN. 3. While tracking, adjust with RGH MLIN and RGH LIN so that the sizes of the horizontal line at the center of the screen are symmetrical left and right.			<RGH MENU> RGH MLIN (07) RGH LIN (05)	

ADJUSTMENT ITEM AND PROCEDURE	EQUIPMENT AND SIGNAL	MEASUREMENT POSITION	ADJUSTMENT LOCATION	ILLUSTRATION AND SHAPE AND NUMBER
GREEN HORIZONTAL SIZE ADJUSTMENT 1. Adjust with RGH MSIZE so that the sizes of both ends and of both sides of the center section of the screen are equal. 2. Adjust with RGH SIZE so that the horizontal sizes of both ends and of both sides of the center section of the screen are equal. 3. While tracking, adjust with RGH MSIZ and RGH SIZE so that the lattice intervals for the horizontal line section of the center section of the screen are equal and so that the horizontal size is the prescribed value. 4. If M LIN is changed when the RGH MSIZ and RGH SIZE adjustment is complete, adjust again while tracking. ●With just the H SIZE adjustment in MAIN, if there is no need to adjust RGH SIZE in SUB this can save power.			<RGH MENU> RGH MSIZ (06) RGH SIZE (04)	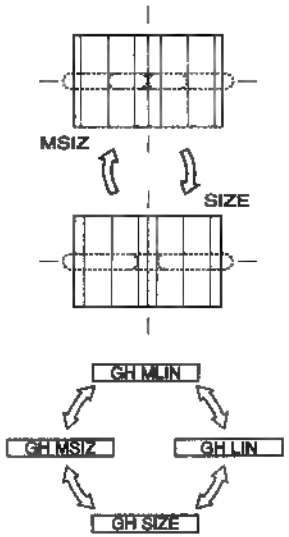
GREEN VERTICAL LINEARITY ADJUSTMENT 1. Adjust RGV LIN so that the vertical lines at the top and bottom of the screen are symmetrical.			<RGV MENU> RGV LIN (04)	

ADJUSTMENT ITEM AND PROCEDURE	EQUIPMENT AND SIGNAL	MEASUREMENT POSITION	ADJUSTMENT LOCATION	ILLUSTRATION AND SHAPE AND NUMBER
GREEN VERTICAL SIZE ADJUSTMENT 1. Adjust with RGV MSIZE so that the sizes for the top and bottom sections of the screen and for both sides of the center section of the screen are equal. 2. Set the vertical size to the prescribed value with RGV SIZE. 3. Adjust RGV MSIZ and RGV SIZE watching the vertical line at the center section of the screen. 4. While tracking, adjust with RGV MSIZ and RGV SIZE so that the lattice intervals for the vertical line section of the center section of the screen are equal and so that the vertical size is the regulation value. 5. If RGV LIN is out of place when the RGV MSIZ and RGV SIZE adjustment is complete, adjust again while tracking. ●If there is no need to adjust RGV SIZE in SUB with just the V SIZE adjustment in MAIN, this can save power.			<RGV MENU> RGV MSIZ (05) RGV SIZE (03)	 
GREEN HORIZONTAL TRAPEZOIDAL DISTORTION ADJUSTMENT 1. Adjust with RGH SSKW so that the tilt of the vertical lines at both ends of the screen is symmetrical left and right. 2. Adjust with RGH KEY so that there is no tilt in the vertical lines at both ends of the screen. 3. If there is a tilt on either the left or right after the RGH KEY adjustment, adjust while tracking.			<RGV MENU> RGH SSKW (09) RGH KEY (08)	

ADJUSTMENT ITEM AND PROCEDURE	EQUIPMENT AND SIGNAL	MEASUREMENT POSITION	ADJUSTMENT LOCATION	ILLUSTRATION AND SHAPE AND NUMBER
GREEN HORIZONTAL QUATERNARY ADJUSTMENT 1. Correct the quaternary distortion with RGH 4PIN. 2. While balancing, correct the quaternary distortion of both end sections of the screen with RGH 4SBO. 3. While tracking, adjust with RGH 4PIN and RGH 4SBO.			<RGH MENU> RGH 4PIN (14) RGH 4SBO (15)	
GREEN HPRIZONTAL ASYMMETRICAL PIN DISTORTION ADJUSTMENT 1. Adjust with RGH MBOW so that the pin asymmetry at both sides of the center section of screen is symmetrical. 2. Adjust with RGH SBOW so that the bow at both end sections of the screen is symmetrical left and right. 3. While tracking, adjust with RGH MBOW and RGH SBOW so that the bow of vertical lines on the entire screen is symmetrical left and right.			<RGH MENU> RGH MBOW (13) RGH SBOW (12)	

ADJUSTMENT ITEM AND PROCEDURE	EQUIPMENT AND SIGNAL	MEASUREMENT POSITION	ADJUSTMENT LOCATION	ILLUSTRATION AND SHAPE AND NUMBER
GREEN HORIZONTAL SYMMETRICAL PIN DISTORTION ADJUSTMENT 1. Adjust the pin distortion at both sides of the center section of the screen with RGH MPIN. 2. Adjust the pin distortion at both end sections of the screen with RGH PIN. 3. While tracking, adjust with RGH MPIN and RGH PIN so that the PIN of vertical lines on the entire screen have no bowing. 4. If there is asymmetrical pin distortion after the RGH MPIN and RGH PIN adjustments, adjust with RGH MBOW and RGH SBOW while tracking. ●With just the PIN AMP adjustment in MAIN, if there is no need to adjust RGV PIN in SUB, this can save power.			<RGH MENU> RGH MPIN (10) RGH PIN (11) RGH MBOW (13) RGH SBOW (12)	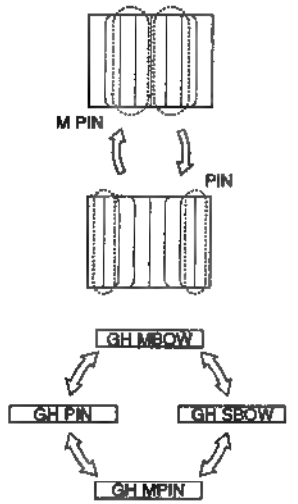
GREEN VERTICAL WAVE (TERTIARY DISTORTION) ADJUSTMENT 1. Take the screen top and bottom horizontal lines with RGV WAVE and find the secondary and quaternary waveform. 2. There is KEY distortion after the RGV WAVE adjustment, so adjust with GV WAVE and RGV KEY while tracking.			<RGV MENU> RGV WAVE (12) RGV KEY (07)	RGV WAVE  RGV KEY  

ADJUSTMENT ITEM AND PROCEDURE	EQUIPMENT AND SIGNAL	MEASUREMENT POSITION	ADJUSTMENT LOCATION	ILLUSTRATION AND SHAPE AND NUMBER
GREEN VERTICAL QUATERNARY DISTORTION ADJUSTMENT 1. Correct the quaternary distortion of the horizontal lines at the top and bottom sections of the screen with RGV 4PIN. 1) Since there is no 4SBO for vertical correction, there will be ■ slight imbalance, but adjust to eliminate the distortion from the horizontal line at either the top or the bottom of the screen. 2) In many cases, the horizontal lines at the top and bottom sections of the screen are not straight lines after the adjustment. As long as the secondary distortion is mild enough that it can be corrected with the PIN adjustment, this is OK.			<RGV MENU> RGV 4PIN (13)	RGV 4PIN 
GREEN VERTICAL TRAPEZOIDAL DISTORTION ADJUSTMENT 1. Adjust with RGV SSKW so that the tilt of the horizontal lines at the top and bottom sections of the screen is symmetrical about the center position horizontal line. 2. Adjust with RGV MKEY so that there is no tilt for the line sections ■ both sides of the horizontal lines at the center section of the stream. 3. Adjust with RGV KEY so that there is no tilt for the horizontal lines ■ the top and bottom sections of the screen. 4. While tracking, adjust with RGV MKEY and RGV KEY so that there is no tilt for the horizontal lines on the entire screen. 5. If the tilt is unbalanced after the RGV MKEY and RGV KEY adjustment, adjust again with RGV SSKW.			<RGV MENU> RGV SSKW (08) RGV MKEY (06) RGV KEY (07) RGV SSKW (08)	RGV SSKW   

ADJUSTMENT ITEM AND PROCEDURE	EQUIPMENT AND SIGNAL	MEASUREMENT POSITION	ADJUSTMENT LOCATION	ILLUSTRATION AND SHAPE AND NUMBER
GREEN VERTICAL ASYMMETRICAL PIN DISTORTION (SECONDARY DISTORTION) ADJUSTMENT 1. Correct the asymmetrical pin distortion at the top and bottom sections of the screen with RGV SBOW.			<RGV MENU> RGV SBOW (11)	RGV SBOW 
GREEN VERTICAL ASYMMETRICAL PIN DISTORTION ADJUSTMENT 1. Adjust the pin distortion for both side sections and the center of the screen with RGV MPIN. 2. Adjust with RGV PIN so that the horizontal lines at the top and bottom sections of the screen are straight lines. 3. Adjust with RGV MPIN and RGV PIN so that there is no curve in the horizontal lines on the entire screen.			<RGV MENU> RGV MPIN (09) RGV PIN (10)	
4. After the adjustments in Items 1-3, adjust the tracking with RGV SBOW, RGV MPIN, and RGV PIN.			RGV SBOW (11)	

ADJUSTMENT ITEM AND PROCEDURE	EQUIPMENT AND SIGNAL	MEASUREMENT POSITION	ADJUSTMENT LOCATION	ILLUSTRATION AND SHAPE AND NUMBER
GREEN AND RED REGISTRATION ADJUSTMENT **(RRH, RRV)** 1. Receive a PAL cross-hatch signal. 2. Adjust so that the red lines lay on the green lines. Adjust with the same procedure as the GREEN SUB adjustment. Notes: 1. The main correction is not carried out during red registration adjustment. 2. Beware. The green adjustment items can be changed by mistake. 3. Unlike for green, adjust within the range -124 ~ +124. **GREEN AND BLUE REGISTRATION ADJUSTMENT** **(RBH, RBV)** 1. Receive a PAL cross-hatch signal. 2. Adjust so that the blue and green lines are on top of each other. Notes : 1. The main correction is not carried out during RED registration adjustment. 2. Beware. The GREEN and RED adjustment items can be changed by mistake. 3. Receive "ALL WHITE SIGNAL" and confirm the registration. 4. After the registration adjustment in "FULL MODE", write the data in memory by pressing MUTING and 0 on the remote commander. 5. Then, copy the data of "FULL / ZOOM" by pressing 2 and 0 on the commander and copy the data of "50/60Hz" by pressing DISPLAY and 0.	PAL Cross-hatch pattern PAL Cross-hatch pattern			

ADJUSTMENT ITEM AND PROCEDURE	EQUIPMENT AND SIGNAL	MEASUREMENT POSITION	ADJUSTMENT LOCATION	ILLUSTRATION AND SHAPE AND NUMBER
WHITE BALANCE ADJUSTMENT 1. Receive the monoscope pattern signal and adjust the picture quality with the menu. 2. Adjust service mode SBRT so that the signal 10 IRE section barely glows. 3. Receive the all-white pattern signal. 4. Adjust the white balance with service mode GCUT and BCUT. 5. Adjust service mode SBRT so that the signal 100 IRE section barely glows. 6. Adjust the white balance with service mode GAMP and BAMP. 7. Repeatedly adjust the white balance for the minimum and maximum picture settings.	Monoscope pattern All-white pattern		PICTURE ..... Minimum < RGB MENU > SBRT (03) GCUT (06) BCUT (07) PICTURE ..... Minimum GAMP (03) BAMP (04) PICTURE ..... Maximum	

SECTION 4
ELECTRICAL ADJUSTMENTS

ADJUSTMENT ITEM AND PROCEDURE	EQUIPMENT AND SIGNAL	MEASUREMENT POSITION	ADJUSTMENT LOCATION	ILLUSTRATION AND SHAPE AND NUMBER
B BOARD ADJUSTMENT **COLOR ADJUSTMENT** 1) SUB-HUE AND SUB-COLOR ADJUSTMENT (MAIN SCREEN) 1. Input the signal and put the set into service mode. 2. Connect an oscilloscope between connector on the B(1/4) board. 3. Adjust SHUE and SCOL so that Vw = Vcy = VMg=VBI in the waveform levels. 4. Write the data to memory.	Color Bar pattern Oscilloscope	CN4 ⑦ pin (B(1/4) Board)	SHUE, SCOL : Vw = Vcy =VMg=VBI MUTING ↓ ENTER	<CN4 ⑦ pin OUTPUT> (FULL MODE) 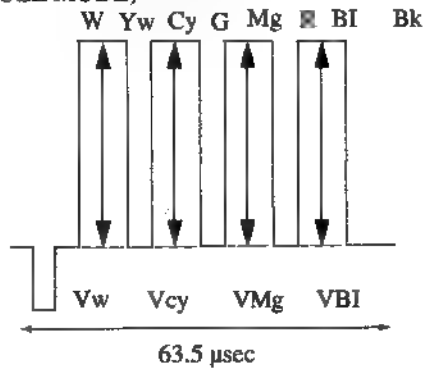
2) SUB-HUE (P IN P SCREEN) 1. Input the signal and put the set into service mode. 2. Connect an oscilloscope between connector on the B(1/4) board. 3. Adjust SHUE so that Vw = Vcy = VMg=VBI in the waveform levels. 4. Write the data to memory.	Color Bar pattern Oscilloscope	CN4 ⑦ pin (B(1/4) Board)	SHUE : Vw = Vcy =VMg=VBI MUTING ↓ ENTER	<CN4 ⑦ pin OUTPUT> (TWIN PICTURE MODE) 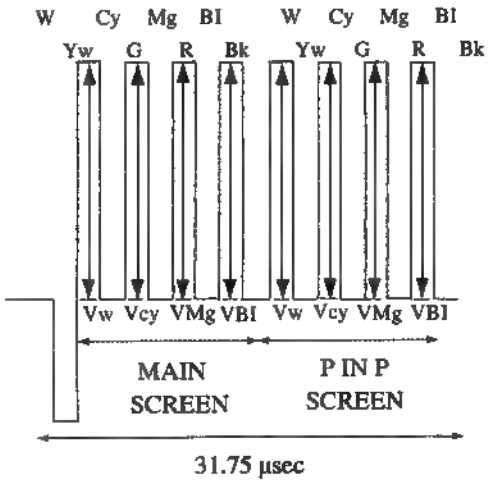
SUB BRIGHTNESS ADJUSTMENT 1. Receive the signal and adjust the picture quality with the menu. 2. Adjust service mode SBRT so that the signal 10 IRE section barely glows.	Monoscoope pattern		PICTURE ..... Minimum SBRT	
HWE ADJUSTMENT 1. Upon receiving the signal, select NORMAL in SCREEN mode. 2. In SERVICE mode adjust " HWE " so that the video signal is balanced on left and right (symmetrical).	Monoscoope pattern		HWE MUTING ↓ ENTER	

ADJUSTMENT ITEM AND PROCEDURE	EQUIPMENT AND SIGNAL	MEASUREMENT POSITION	ADJUSTMENT LOCATION	ILLUSTRATION AND SHAPE AND NUMBER
P IN P POSITION ADJUSTMENT 1. Upon receiving the Monoscope signal, select FLL in SCREEN mode. 2. Set SERVICE mode and then press the P in P command twice. The P in P positon will then move periodically to four points. Adjust " RDV " and " RDH " on the new screen so that the four points are distributed equally at ; up, down, left and right.	Monoscope pattern		RDV (side) RDH (length)	
TEXT POSITION ADJUSTMENT 1. Receive the overlapping TEXT signal. 2. Set the TEXT in MIX mode and adjust the screen positon with " TXH " and " TXV ".			TXH TXV MUTING ↓ ENTER	
OSD POSITION ADJUSTMENT 1. Receive the Color signal and select a mode other than NORMAL mode. 2. Adjust " OSH " so that the center line of the signal and the center of the crosshairs of the OSD display match are aligned with each other.	PAL COLOR Bar pattern		OSH MUTING ↓ ENTER	

ADJUSTMENT ITEM AND PROCEDURE	EQUIPMENT AND SIGNAL	MEASUREMENT POSITION	ADJUSTMENT LOCATION	ILLUSTRATION AND SHAPE AND NUMBER
[ZOOM MODE ADJUSTMENT] **V BLANKING SIZE ADJUSTMENT** 1. Receive PAL monoscope signal and set at "ZOOM MODE". 2. Select "BKU" in D/A menu. 3. Reduce the data value by pressing 3 and 6 on the commander to adjust blanking size and minimize the shear on the screen top. 4. Select "BKD" in D/A menu. 5. Raise the data value by pressing 3 and 6 on the commander to adjust blanking size and minimize the shear on the screen bottom.	PAL Monoscoope pattern			
V SIZE ADJUSTMENT 1. Receive PAL monoscope signal and set at "ZOOM MODE". 2. Select "V SIZE" in VSP menu. 3. Set the V size at 9.4 ± 0.312 by pressing 3 and 6 on the commander. * • After the registration adjustment in "ZOOM MODE", write the data in memory by pressing MUTING and 0 on the commander. • Then, copy the data of "50/60Hz" by pressing DISPLAY and 0. * • "WIDE ZOOM" proceed MAIN and SUB REGISTRATION ADJUSTMENT like "FULL MODE". • After the registration adjustment in "ZOOM MODE", write the data in memory by pressing MUTING and 0 on the commander. • Then, copy the data of "50/60Hz" by pressing DISPLAY and 0.	PAL Monoscoope pattern			

ADJUSTMENT ITEM AND PROCEDURE	EQUIPMENT AND SIGNAL	MEASUREMENT POSITION	ADJUSTMENT LOCATION	ILLUSTRATION AND SHAPE AND NUMBER
H SIZE ADJUSTMENT 1. Receive a PAL monoscope signal to set to "ZOOM MODE". 2. Set to Service Mode. 3. Select H SIZE of VSP menu with the commander buttons [1] and [4]. 4. Adjust to 15.5 ± 0.3 square with [3] and [6].	PAL Monoscoope pattern			
[WIDE ZOOM ADJUSTMENT] **S CORRECTION ADJUSTMENT** 1. Receive a PAL monoscope signal to set to "WIDE ZOOM". 2. Set to Service Mode. 3. Select VSCO of VSP menu with the commander buttons [1] and [4]. 4. Adjust to data "00" with [3] and [6].	PAL Monoscoope pattern			
V SIZE ADJUSTMENT 1. Receive a PAL monoscope signal to set to "WIDE ZOOM ". 2. Set to Service Mode. 3. Select V SIZE of VSP menu with the commander buttons [1] and [4]. 4. Adjust to 11.2 ± 0.2 square with [3] and [6].	PAL Monoscoope pattern			
H SIZE ADJUSTMENT 1. Receive a PAL monoscope signal to set to "WIDE ZOOM ". 2. Set to Service Mode. 3. Select H SIZE of VSP menu with the commander buttons [1] and [4]. 4. Adjust to 15.5 square with [3] and [6].	PAL Monoscoope pattern			

SECTION 5
SAFETY RELATED ADJUSTMENTS

ADJUSTMENT ITEM AND PROCEDURE	EQUIPMENT AND SIGNAL	MEASUREMENT POSITION	ADJUSTMENT LOCATION	ILLUSTRATION AND SHAPE AND NUMBER
[E BOARD] **◪ R988 RESISTOR CONFIRMATION METHOD (HV HOLD DOWN CONFIRMATION) AND ADJUSTMENTS** The following adjustments should always be performed when replacing the following components (marked with ◪ on the schematic diagram). 1. Remove the cap for the unconnected pin in the high-voltage block and connect a HIGH-VOLTAGE Voltmeter. 2. Receive the Dot signal and set the PICTURE and BRIGHTNESS setting to their minimums. 3. Connect a 68kΩ variable resistor across the E board CN4007 connector (with the variable resistor set to its minimum). 4. Gradually upper the value of the variable resistor and check that the hold down circuit operates at a HIGH-VOLTAGE Voltmeter reading of 34.40 ± 0.40kVDC and that the rasters disappear. 5. When the hold-down circuit starts operating, switch OFF the power of the set immediately. 6. Remove the VR connected to CN4007 and measure resistance value. 7. Solder a resistor (METAL OXIDE 1/4W), whose resistor value is equivalent to measured above, to CN4007 in place of the VR. 8. Check Item 5 again.	HIGH-VOLTAGE Voltmeter Dot signal	◪ marked parts C4057, D4026, R988, R4019, T4002, T4003 (FBT), E BOARD, HV Block HV Block CN4007 HIGH-VOLTAGE Voltmeter 34.40 ± 0.40kVDC	◪ R988 PICTURE ..... minimum BRIGHTNESS ..... minimum	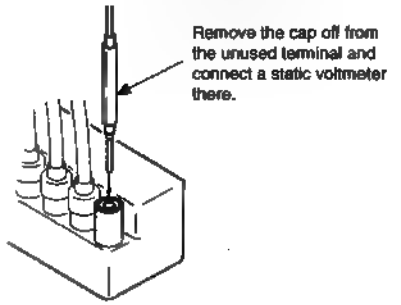 

ADJUSTMENT ITEM AND PROCEDURE	EQUIPMENT AND SIGNAL	MEASUREMENT POSITION	ADJUSTMENT LOCATION	ILLUSTRATION AND SHAPE AND NUMBER
■ R983 RESISTOR CONFIRMATION METHOD (HV REGULATION CONFIRMATION) AND READJUSTMENTS The following adjustments should always be performed when replacing the following components (marked with ■ on the schematic diagram)		■ marked parts C4033, C4034, C4046, C4047, C4049, D4012, D4018, D4023, D4028, D4035, R983, R4022, R4046, R4047, R4048, R4053, R4054, R4057, R4059, R4060, R4061, R4077, R4079, R4086, R4087, R4088, R4091, R4092, R4097, R4098, R4100, Q4013, T4002, T4003 (FBT), E Board HV Block	☒ R983	E BOARD -COMPONENT SIDE- 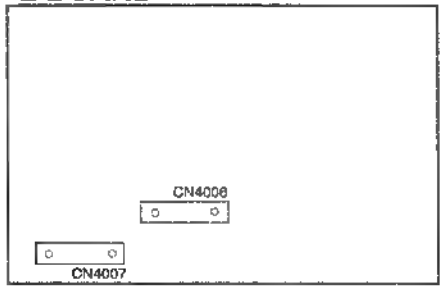
1. Remove the cap for the unconnected pin in the high-voltage block and connect a HIGH-VOLTAGE Voltmeter. 2. Receive the Dot signal and set the PICTURE and BRIGHTNESS settings to their minimums. 3. Connect a 68kΩ variable resistor across the E board CN4006 connector (with the variable resistor set to its maximum). 4. Gradually lower the value of the variable resisotr and check that the hold down circuit operates at a HIGH-VOLTAGE Voltmeter reading of 31.00 ± 0.30k VDC and that the rasters disappear. 5. When the hold-down circuit starts operating, switch OFF the power of the set immediately. 6. Remove the VR connected to CN4006 and measure resistance value. 7. Solder a resistor (METAL OXIDE 1/4W), whose resistor value is equivalent to measured above, to CN4006 in place of the VR. 8. Check Item 5 again.	HIGH-VOLTAGE Voltmeter Dot signal	HV Block CN4006 HIGH-VOLTAGE Voltmeter 31.00 ± 0.30k VDC	PICTURE ..... minimum BRIGHTNESS ..... minimum	CN4006  68KΩ

ADJUSTMENT ITEM AND PROCEDURE	EQUIPMENT AND SIGNAL	MEASUREMENT POSITION	ADJUSTMENT LOCATION	ILLUSTRATION AND SHAPE AND NUMBER
HV HOLD DOWN ADJUSTMENT WITHOUT USING HV REGULATOR (⊠R983, ⊠R988) 1. Receive DOT signal (PICTURE : 80%, BRIGHTNESS : 50%). 2. Turn off the power of the projector, and remove ⊠R983 from CN4006 and ⊠R988 from CN4007. 3. Fix a 47kΩ VR onto CN4006 with solder, and set the resistor value at maximum. Fix a 68kΩ VR onto CN4007 with solder, and set the resistor value at minimum. 4. Turn on the power of the projector. Connect a digital voltmeter to IC4001 ⑤ pin. 5. Slowly turn the 47kΩ VR that is soldered to CN4006, and gradually lower the voltage of IC4001⑤ pin down to 1.67VDC. 6. Slowly turn the 68kΩ VR that is soldered to CN4007, and gradually raise the resistor value until the raster disappears and the HV hold down circuit starts operating. 7. Turn off the power of the projector. 8. Remove the 68kΩ VR from CN4007, and measure the resistor value with the digital voltmeter. Put a resistor (metal oxide, 1/4W) that has same value as the measured resistor onto CN4007 and solder it. 9. Set the value of the 47kΩ VR on CN4006 at the maximum. Receive DOT signal (PICTURE : 80%, BRIGHTNESS : 50%). 10. Turn on the power of the projector. 11. Connect a digital voltmeter to IC 4001⑤ pin. 12. Slowly turn down the 47kΩ VR that is connected to CN4006 to gradually lower the voltage of IC4001 ⑤ pin between 1.62 to 1.7VDC, and check if the raster disappears and the hold down circuit operates. 13. Turn off the power of the projector. 14. Remove the 47kΩ VR from CN4006. Put back the removed ⊠ R983 onto CN4006 and solder it again.	Dot signal Digital voltmeter	IC4001 ⑤ pin	⊠ R983, R988 47kΩ VR ..... maximum 68kΩ VR ..... minimum PICTURE .....80% BRIGHTNESS .....CENTER	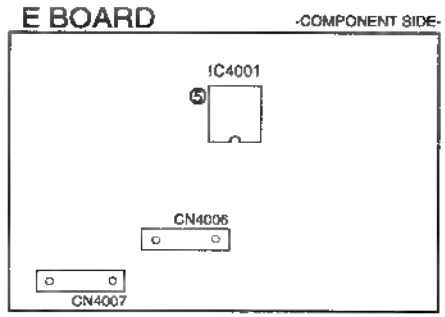 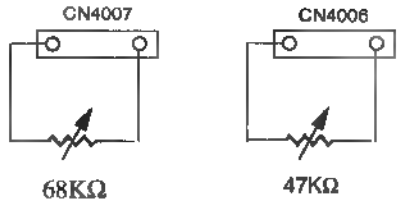

ADJUSTMENT ITEM AND PROCEDURE	EQUIPMENT AND SIGNAL	MEASUREMENT POSITION	ADJUSTMENT LOCATION	ILLUSTRATION AND SHAPE AND NUMBER
HV REGULATOR ADJUSTMENT (■R983) 1. Receive DOT signal (PICTURE : 80%, BRIGHTNESS : 50%). 2. Turn off the power of the projector. 3. Remove ■R983 from CN4006. 4. Fix a 47kΩ VR onto CN4006 with solder, and set the resistor value at maximum. 5. Turn on the power of the projector. Connect a digital voltmeter to IC4001 ⑤ pin. 6. Slowly turn the 47kΩ VR that is soldered to CN4006, and gradually lower the voltage of IC4001⑤ pin down to 1.49VDC. 7. Turn off the power of the projector. 8. Remove the 47kΩ VR from CN4006, and measure the resistor value with the digital voltmeter. Put a resistor (metal oxide, 1/4W) that has same value as the measured resistor onto CN4006 and solder it. 9. Turn on the power of the projector. Check if th evoltage of IC4001 ⑤ pin is between 1.46 nad 1.53VDC. 10. Receive FULL WHITE signal (PICTURE : 80%, BRIGHTNESS : 50%). 11. Turn off the power of the projector.	Dot signal		■ R983 PICTURE .....80% BRIGHTNES .....center	E BOARD -COMPONENT SIDE- 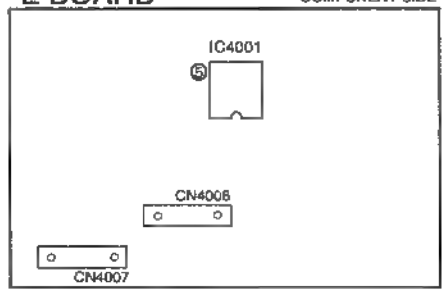 CN4006  47KΩ
[G BOARD] **+B MAX VOLTAGE CONFIRMATION** The following adjustments should always be performed when replacing IC6002 and R6054. 1. Supply 230VAC to with variable autotransformer. 2. Input an entirely monoscope signal. 3. Set the PICTURE control and the BRIGHT controls in to initial reset. 4. Confirm the voltage of G BOARD CN6014 ① pin connecter is less than 134.50 ± 1.00VDC. 5. If step 4 is not satisfied, replace IC6002 and R6054 repeat above steps.				G BOARD – COMPONENT SIDE – 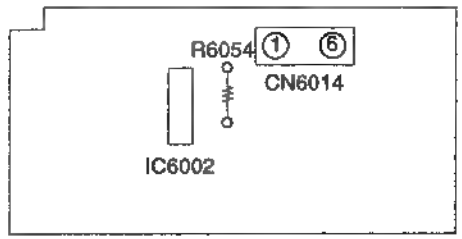

6-5. SEMICONDUCTORS

BA7046F
LM358D
LM393PS
NJM2234M
NJM2235M
NJM2240M
NJM4558M
µPC4558G2



8 pin

CXA1315M
HD74HC123AP
HEF4046BT-T
MC14046BDWR2
MC14053BCP
MC74F163AM
MC74HC163AF
MC74HC4053F
MC74HC4538F
TDA4665T-T
µPD4053BC

18 pin

CXA1817S



30 pin

CXA1855S

48 pin

CXD2018Q

48 pin

CXD2024AQ



80 pin

CXP5068H-244Q
CXP85460-005Q

64 pin

CXP85112B-613S

64 pin

CX20125

8 pin

LA7856A
PA0053B
TDA2579B

18 pin

LM358P
LM393P
ST24016CM1-TR/A
µPC358C
µPC393C

8 pin

MB81C1000A-80PSZ



MC14066BF
MC74F00M
MC74F08DR2
MC74F08M
MC74F74M
MC74HC00AF
MC74HC74AF



14 pin

MN1382S



MSP3410
P83C652FBA-V3/AB517
TPU3040



44 pin

NJM2058D

8 pin

NJM78L05A

NJM78M12FA
NJM7805FA
PQ09RF2
TA7812S

NJM7905FA
NJM7912FA



PM0002B



42 pin

PQ05RF1

PQ12RF1



4 pin

SAA4940H-T



SAA4951WP/V1-T



SAA7158WP-T



68 pin

SBX1780-51

SDA9187-2XGEG
SDA9188-3XGEG



28 pin

STK392-040

22 pin

STR81159A

STV9379



S-80743AL-A7-S



TC4S66F



5 pin

TDA4650/V4
TDA4780/V3

28 pin

TDA6111Q



TDA7265

11 pin

TDA8755T-T



32 pin

TDA9141-N2C
TDA9160A

32 pin

TL431CLP

µPC339C



14 pin

µPC574J



ZA2970-26DTR



36 pin

BF550



DTA114EKA-T146
DTA144EKA-T146
DTC114EKA-T146
DTC114EK
DTC144EKA-T146
2SA1037K-T-146-QR
2SA1162G
2SB709A-QRS-TX
2SC1623-L5L6
2SC2412K-QR
2SC2712-YG

DTA144ESA

IRFI640
2SA1837
2SC4105-N
2SC4793

2SA1013-O
2SA1208

2SA1175-HFE
2SA1309A-QRS
2SC2785-HFE
2SC3311A-QRSTA
2SC3623A-LK

2SA1221-L
2SA1221-T-M
2SB733-34
2SB734-T-4
2SD774-34

2SA1301-O



2SB649A
2SC2688-LK



2SC2878-AB

2SC3997CA



2SC4025MNPR

2SC4632LS-CB7



2SC4834P

BAS16
BBY40

DAN202K

DAP202K

DA204K
1SS226

D1NL20
EGP20G
GP08D
HZT33-02
RGP02-20EL-6394
RGP15GPKG23
1SS83



D1NS4
D1N20R
RD12ES-B2
RD13ES-B2
RD18ES-B2
RD2.4ES-B2
RD20ES-B2
RD27ES-B2
RD3.3ES-B2
RD33ES-B1
RD39ES-B2
RD4.3ES-B2
RD5.6ES-B2
RD7.5ES-B2
RD8.2ES-B2
RD9.1ES-L
RD9.1EW
RM11C
1SS119-25
1SS133



D10SC4MR

D10SC4M
D10SC6M
D8LC40

D10SC6MR



D10XB60S
RBA-4068



D2L40-TA



ERC06-15S
ERC91-02
S2LA20F



ERC38-06
V19E

ERD08M-15

MA110



MA3024-TX
MA3033-L
MA3047-TX
MA3051M
MA3075M
MA3130
RD13M-B2
RD2.0M-B2
RD4.7M-B2
RD5.1M-B2
RD7.5M-B2



SC802-06



S1WB60B



TLR124



7-1.CONTROL PANEL, MIRROR COVER AND BEZNET

● : +BVTP 3x12 7-685-648-79
■ : +BVTP 4X16 7-685-663-79

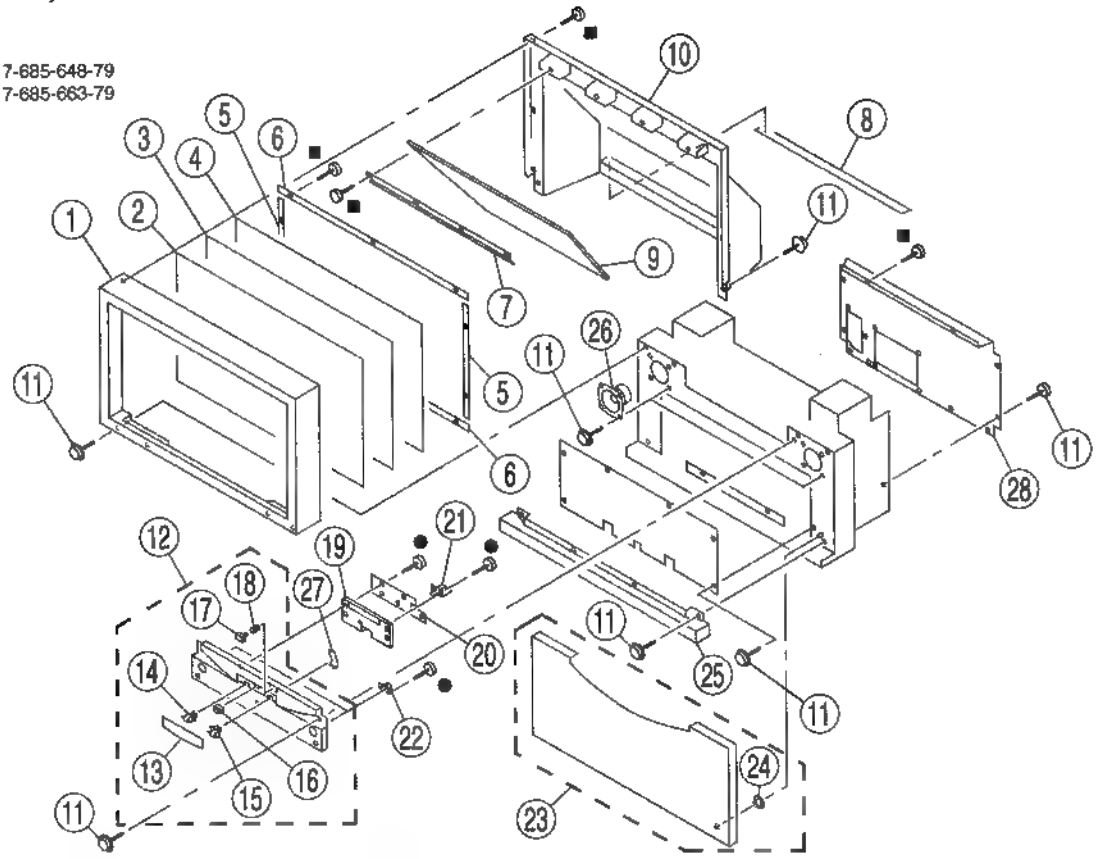

7-2. CHASSIS

● : +BVTP 3x12 7-685-648-79
■ : +BVTP 4X16 7-685-663-79

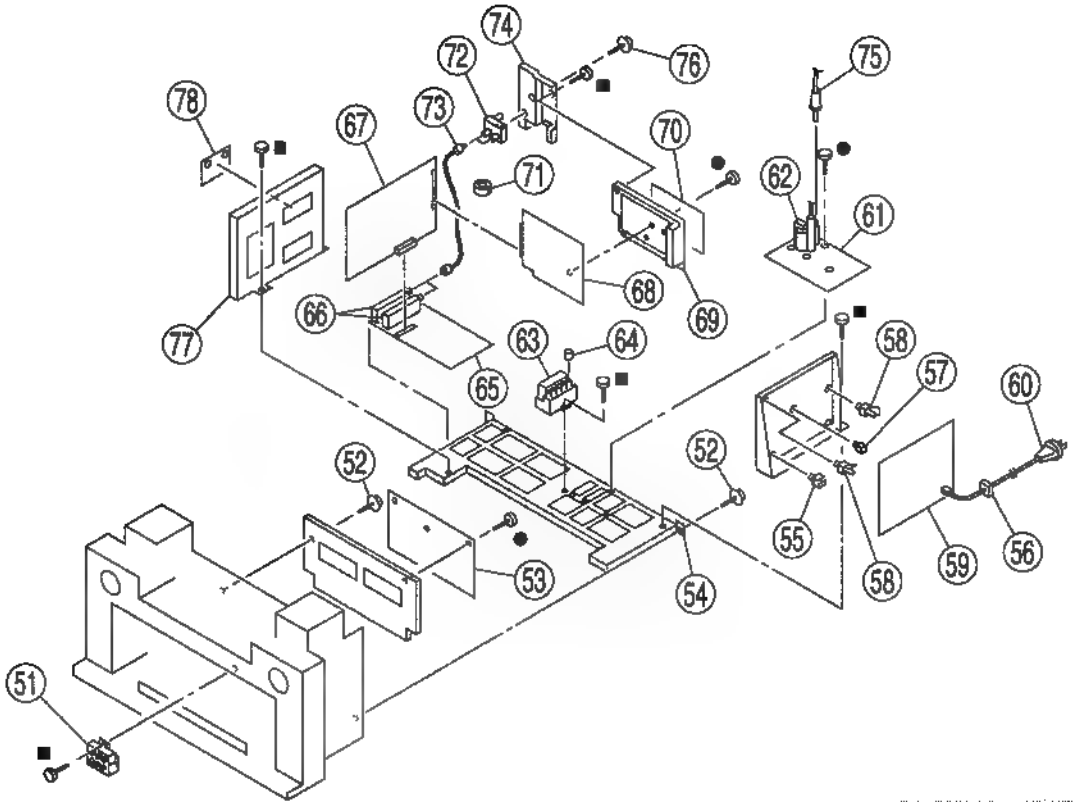

7-3. PICTURE TUBE

■ : BVTP 4X16 7-685-663-79

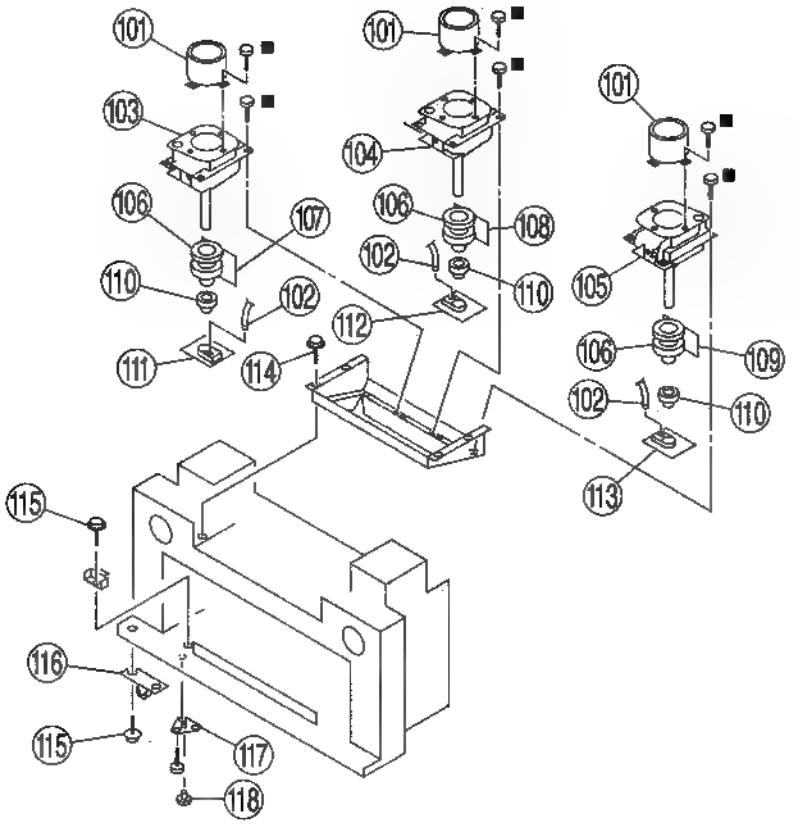

SERVICE MANUAL

RX-1E CHASSIS

MODEL	COMMANDER	DEST.	CHASSIS NO.
KP-46S4	RM-831	AEP	SCC-N24A-A
KP-46S4K	RM-831	OIRT	SCC-N25A-A
KP-46S4U	RM-831	UK	SCC-N26A-A

MODEL	COMMANDER	DEST.	CHASSIS NO.
KP-53S4	RM-831	AEP	SCC-N24B-A
KP-53S4K	RM-831	OIRT	SCC-N25B-A
KP-53S4U	RM-831	UK	SCC-N26B-A

RM-831

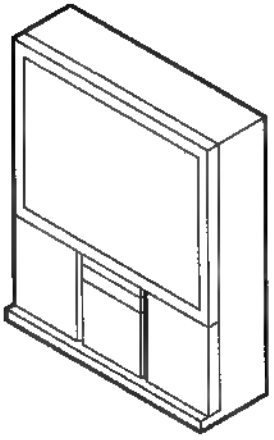

KP-46S4/46S4K/46S4U
KP-53S4/53S4K/53S4U

MICROFILM

PROJECTION TV

SONY

※ Please file according to model size. .....

46 53

SPECIFICATIONS

Television system	B/G/H,D/K,I,L
Colour system	PAL/SECAM and NTSC 3.58/NTSC4.43 (VIDEO IN)
Channel coverage	See " Receivable channels and channel displays " at the bottom.
Projected picture size	116cm (46 inches)
Terminals	133cm (53 inches)
Rear	Center speaker input terminals, 2 terminals
	(L,R), audio outputs - phono jacks (variable)
	1, 21-pin Euro connector (CENELEC standard)
	-inputs for audio and video signals
	- inputs for RGB
	- outputs of TV audio and video signals
	2/ 2, 21-pin Euro connector
	- inputs for audio and video signals
	- inputs for S Video
	- outputs for audio and video signals (selectable)
	2, S video inputs - 4 pin DIN
	(L,R), audio inputs - phono jacks
	4/ 4, 21-pin Euro connector
	- inputs for audio and video signals
	- inputs for S video
	- outputs for audio and video signals (monitor out)
	4, S video inputs - 4 pin DIN
	(L, R), audio inputs - phono jacks
	S video outputs 4-pin DIN (monitor out)
	(L, R) , audio outputs - phono jacks (fixed)
Front	3, video input-phono jack
	(L, R) , audio inputs-phono jacks
	3, S video input-4-pin DIN
	, headphone jack - stereo minijack
Sound output	2 x 30W (music power)
	2 x 15W (RMS)
Power consumption	225W
Dimensions(WxHxD)	KP-46S4K : 1104 x 1267 x 512 mm
	KP-53S4K : 1164 x 1335 x 650 mm
Weight	KP-46S4K : 79kg
	KP-53S4K : 90kg
Supplied accessories	RM-831 Remote Commander
	One IEC designation R6 battery
Other features	Digital comb filter (High resolution)
	PIP (Picture-in-picture)
	FASTEXT
	NICAM (B/G, L, I)
	B/G STEREO
	D/K STEREO

Design and specifications are subject to change without notice.

Receivable Channels and Screen Displays

	Receivable channels	Indication on the screen
PAL B/G/H	E2..12 21..69	C02 C03 C04..C12 C21..C69
CABLE TV (1)	S1..41	S01 S02..S41
CABLE TV (2)	S01..S05 M1..M10 U1..U10	S42..S46 S01..S10 S11..S20
ITALIA	A B C D E F G H H1 H2 21..69	C11..C69
SECAM D/K	R01..R12 R21..R60	C02..C12 C21..C60
SECAM L	F2..F10 F21..F69	C01..C12 C21..C69
PAL I	B21.. B68	C21..C68

SECTION 1
GENERAL

The operation instruction mentioned here are partial abstracts from the Operating Instruction Manual. The page numbers of the Operating Instruction Manual remain as ■ the manual.

Overview

This section briefly describes the buttons and controls on the TV set and on the Remote Commander. For more information, refer to the pages given next to each description.

TV set-front

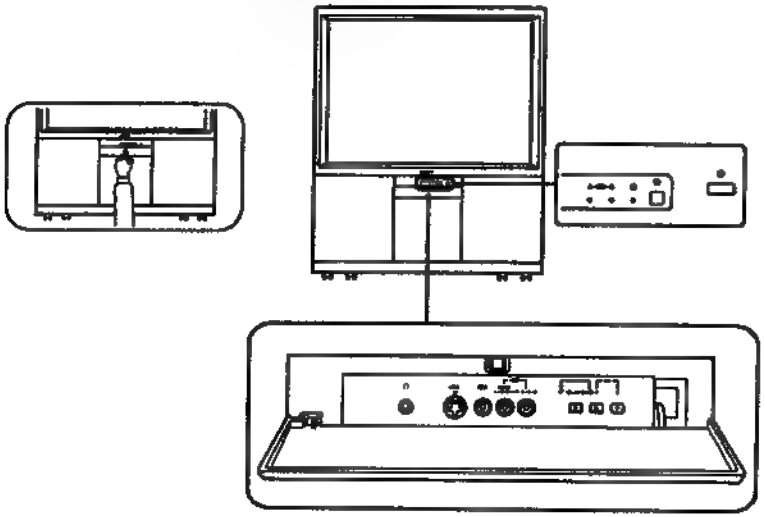

Symbol	Name	Refer to page
⏻	Main power switch	7, 13
⏾	Standby indicator	13
A-CD-B	Stereo A/B indicators	15
Ω	Headphones jack	22
⇥3, ⇤3, ⇤3	Input jacks (S video/video/audio)	22
	Function selector (Programme/volume/input)	14
.–/+	Adjustment buttons for function selector	14

Remote commander RM-831

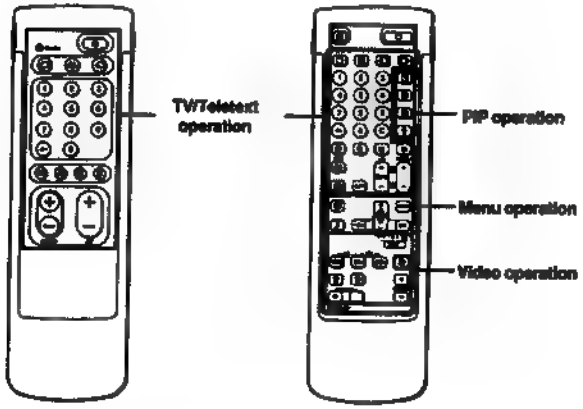

Simple side

Full-Function side

Note
The SAT button does not operate with this TV.

TV/Teletext operation

Symbol	Name	Refer to page
🔇	Mute on/off button	14
⏻	Standby button	13
▢	TV power on/TV mode selector button	13
ⓣ	Teletext button	14
⇤⊡	Input mode selector	14
⊡⇥	Output mode selector	23
1,2,3,4,5,6, 7,8,9,and 0	Number buttons	13
-/--	Double-digit entering button	13
C	Direct channel entering button	10
+/–	Volume control button	13
PROGR+/–	Programme selectors	13
⊠⊠	Teletext page access buttons	19
◉	Picture adjustment button	15
♪	Sound adjustment button	16
⊡	On-screen display button	14
⊡	Teletext hold button	19
⏲	Time display button	14
■■■	Fastext buttons	19

PIP (Picture-in-picture) operation

Symbol	Name	Refer to page
◔	PIP on/off button	17
↕	PIP source selector	17
⇄	Swap button	17
⊞	PIP position changing button	17

Menu operation

Symbol	Name	Refer to page
MENU	Menu on/off button	7
Δ+/ ∇–	Select buttons	7
OK	OK(confirming)button	7
⇦	Back button	7

Video operation

Symbol	Name	Refer to page
VTR1/2/3, MDP	Video equipment selector	24
◀◀ ▶ ▶▶ ■ ● ○ PROGR +/–	Video equipment operation buttons	24

Step 1 Preparation



❶ Check the supplied accessories

When you've taken everything out of the carton, check that you have these items:

- RM-831 Remote Commander
- One IEC designation R6 battery

❷ Insert the battery into the Remote Commander

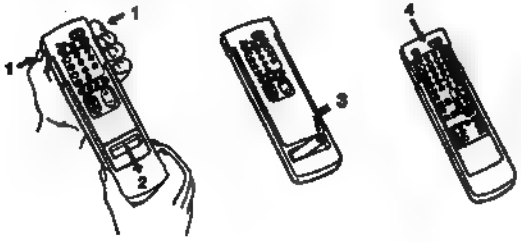

Remove the cover.

Check the correct polarities.

Refit the outside cover making sure that the Full-Function side is visible to use the menu in step 2.

Note: Always remember to dispose of used batteries in an environmental friendly way.

❸ Connect the aerial

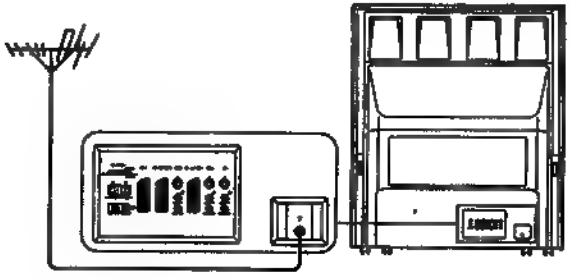

Fit an IEC aerial connector attached to 75-ohm coaxial cable (not supplied) to the 'I' socket at the rear of the TV.

Step 2 Adjusting Colour Registration (CONVERGENCE)



① (main power switch)

Once you have set up the TV, you can choose the language of the menu. Then you should converge the three colour layers (red, green, and blue).

Before you begin

- Check that the Full-Function side of the Remote Commander is visible.
- Locate Menu operation buttons on the Remote Commander. They are shaded in the illustration at the left.

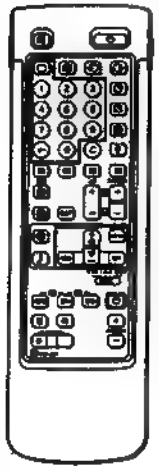

❶ Choose a language

1 Depress ① (main power switch) on the TV unit.
The TV will switch on. If the standby indicator on the TV is lit, press ○ or a number button on the Remote Commander.

2 Press MENU.
The LANGUAGE menu appears. (See Fig. 1).

3 Select the language you want with △ + or ▽ – and press OK.

4 Press ⇐ to return to the main menu.

Fig. 1

❷ Display the menu

Press MENU.

The main menu appears. (See Fig.2)

MENU



Fig. 2

❸ Converge the red, green and blue lines

1 Select "CONVERGENCE" with △ + or ▽ – and press OK.
The CONVERGENCE menu appears. (See Fig. 3.)

2 Select "the line" you want to adjust with △ + or ▽ –.
Key to line adjustment symbols:
I (red vertical – left/right adjustment)
– (red horizontal – up/down adjustment)
I (blue vertical – left/right adjustment)
– (blue horizontal – up/down adjustment)

3 Press OK.
The line to adjust is selected.

4 Press △ + or ▽ – to converge the selected line with the centre green line and press OK.

To move up (horizontal line) To move right (vertical line)	Press △ +
To move down (horizontal line) To move left (vertical line)	Press ▽ –

5 Repeat steps 2 to 4 to adjust the other lines, until all the lines have overlapped to form a white cross. (See Fig. 4.)

6 Press MENU to return to TV picture.

Fig. 3

Fig. 4



Step 3 Tuning in to TV Stations

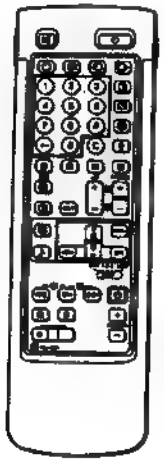

You can preset the channels (up to 100 channels) by choosing either the automatic or manual method.
The automatic method is easier if you want to preset all receivable channels at once. Use the manual method if you only have a few channels and want to preset channels one by one.



Preset Channels Automatically

1 Press MENU to display the main menu.
2 Select "PRESET" with △+ or ▽– and press OK.
The PRESET menu appears. (See Fig. 5.)
3 Select "AUTO TUNING" with △+ or ▽– and press OK.
The AUTO TUNING menu appears. (See Fig. 6.)
4 Select the programme with -/- - and enter the digit numbers from which you want to start presetting.
5 Press OK. Select if necessary the TV broadcast system with △+ or ▽– and press OK. (B/G for western European countries, D/K for eastern European countries, L for France and I for the United Kingdom.)
6 Using △+ or ▽–, select C (to start presetting regular channels) or S (to start presetting cable channels) and press OK.
The automatic channel presetting starts.
When presetting is finished, the preset menu reappears. All available channels are now stored on successive number buttons.
If you want to change to another broadcasting system, repeat steps 3 to 5.
7 Press MENU to return to TV picture.

Fig. 5



Fig. 6

To go back to the main menu
Keep pressing ⇐ .

To stop automatic channel presetting
Press ⇐ on the Remote Commander.

Notes
- After presetting the channels automatically, you can check which channels are stored on which programme positions.
- You can exchange the programme positions to have them appear on screen in the order you like. For details, see "Exchanging the Programme Positions" on page 10.

Use this method if there are only a few channels in your area to preset or if you want to preset channels one by one.

If you have made a mistake
Press ⇐ to go back to the previous position.

To return to the main menu
Keep pressing ⇐.

Preset Channels Manually

1 Press MENU to display the main menu.
2 Select "PRESET" with △+ or ▽– and press OK. (See Fig. 7.)
3 Select "MANUAL TUNING" with △+ or ▽– and press OK.
The MANUAL TUNING menu appears. (See Fig. 8.)
4 Using △+ or ▽–, select the programme position to which you want to preset a channel, and press OK.
You can also select the programme position with the number buttons (e.g. for programme 24, press –/---, 2 and 4).
5 Select, if necessary, the TV broadcast system (B/G for western European countries, D/K for eastern European countries, L for France and I for the United Kingdom) with △+ or ▽–. Then press OK.
6 Using △+ or ▽–, select C (to start presetting regular channels) or S (to start presetting cable channels) and press OK.
7 Press △+ or ▽– until the channel you want appears on the screen.
You can also select the channel directly using the number buttons. Press C (once for VHF/UHF channels, twice for cable TV channels), then the number buttons (e.g., for channel 5, press 0 and 5).
Then press OK.

To preset other channels

Repeat steps 4 to 7.

To return to TV picture

Press MENU.

Fig. 7



Fig. 8

GB

Additional Presetting Functions



This section shows you additional presetting functions such as exchanging or skipping programme positions, captioning a station name, and manual fine-tuning.

You can skip this section, if not needed.

Before you begin

- Check that the Full Function side of the Remote Commander is visible.
- Locate the Menu operation buttons.

PROGRAMME EXCHANGE

Exchanging Programme Positions

With this function, you can exchange the programme positions to a preferable order.

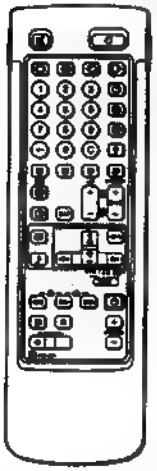

1 Press MENU to display the main menu.

2 Select "PRESET" with Δ+ or ∇– and press OK.
The PRESET menu appears.

3 Select "PROGRAMME EXCHANGE" with Δ+ or ∇– and press OK.
The PROGRAMME EXCHANGE menu appears. (See Fig. 8.)

4 Using Δ+ or ∇–, select the programme position you want to exchange with another and press OK.

5 Using Δ+ or ∇–, select the programme position to be exchanged and press OK. Now the two programme positions have been exchanged.

6 Repeat steps 4 and 5 to exchange other programme positions.

7 Press MENU to return to TV picture.

Fig. 8

If you have made a mistake
Press ⇐ to go back to the previous position.

To go back to main menu
Keep pressing ⇐.

Tuning in to a Channel Temporarily

You can tune in to a channel temporarily, even when it has not been preset. Use the buttons on the Full-Function side of the Remote Commander.

1 Press C on the Remote Commander for regular channels, or twice to get cable channels.
The indication "C" ("S" for cable channels) appears on the screen. (See Fig. 10.)

2 Enter the double-digit channel number using the number buttons (e.g. for channel 4, first press 0, then 4).
The channel appears.
However, the channel will not be stored.

Fig. 10

MANUAL TUNING

Skipping Programme Positions

You can skip unused programme positions when selecting programmes with the PROGR +/– buttons. However, the skipped programmes may still be called up when you use the number buttons.

1 Press MENU to display the main menu.

2 Select "PRESET" with Δ+ or ∇– and press OK.
The PRESET menu appears.

3 Select "MANUAL TUNING" with Δ+ or ∇– and press OK.
The MANUAL TUNING menu appears. (See Fig.11.)

4 Using Δ+ or ∇–, select the programme position which you want to skip and press OK.

5 Press Δ+ or ∇– until "- - -" appears in the SYS position. (See Fig. 12.)

6 Press OK.
When you select programmes using the PROGR +/– buttons, the programme position will be skipped.

7 Repeat steps 4 to 6 to skip other programme positions.

8 Press MENU to return to TV picture.



Fig. 11



Fig. 12

If you have made a mistake
Press ⇐ to go back to the previous position.

To go back to main menu
Keep pressing ⇐.

MANUAL TUNING

Captioning a Station Name

You can "name" a channel using up to five characters (letters or numbers) to be displayed on the TV screen (e.g. BBC1). Using this function, you can easily identify which channel you are watching.

1 Press MENU to display the main menu.

2 Select "PRESET" with Δ+ or ∇– and press OK.
The PRESET menu appears.

3 Select "MANUAL TUNING" with Δ+ or ∇– and press OK.
The MANUAL TUNING menu appears.

4 Select "PR" with Δ+ or ∇– and press OK.

5 Select programme position you want to caption with Δ+ or ∇– and press OK.

6 Select "LABEL" with Δ+ or ∇– and press OK.

7 Select a letter or number with Δ+ or ∇– and press OK.
Select other characters in the same way. If you want to leave an element blank, select - and press OK. (See Fig. 13.)

8 Repeat steps 4 to 7 to caption names for other channels.

9 Press MENU to return to TV picture.



Fig.13

MANUAL TUNING

Manual Fine-Tuning

Normally, the AFT (automatic fine-tuning) is already operating. However, if the picture is distorted, you can use the manual fine tuning function to obtain better picture reception.

1 Press MENU to display the main menu.
2 Select "PRESET" with △+ or ▽– and press OK.
The PRESET menu appears.
3 Select "MANUAL TUNING" with △+ or ▽– and press OK.
The MANUAL TUNING menu appears.
4 Select "PR" with △+ or ▽– and press OK.
5 Select programme position you want to manually fine-tune with △+ or ▽– and press OK.
6 Select "AFT" with △+ or ▽– and press OK.
7 Select "OFF" with △+ or ▽– and press OK. (See Fig. 14.)
8 Fine-tune the channel with △+ or ▽– so that you get the best TV reception. As you press the cursor buttons, the frequency changes from – 128 to + 127.
9 After fine tuning, press OK.
Now the fine-tuned level is stored.
10 Repeat steps 4 to 9 to fine-tune other channels.
11 Press MENU to return to TV picture.

To reactivate AFT (automatic fine tuning)
Repeat from the beginning and select "ON" in step 7.

Fig. 14

Operating Instructions

GB

Watching the TV

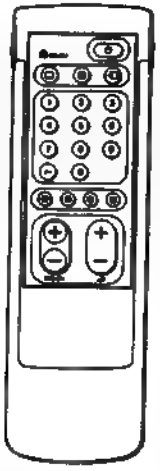

If no picture appears when you depress ⏻ on the TV and if the standby indicator on the TV is lit, the TV is in standby mode.
Press ⏻ or one of the number buttons to switch it on.

This section explains the basic functions you use while watching TV. Most of the operations can be done using the simple side of the Remote Commander.



Switching the TV on and off

Switching on

Depress ⏻ (main power switch) on the TV unit.

Switching off temporarily

Press ⏻ on the Remote Commander.
The TV enters standby mode and the standby indicator on the front of the TV lights up.

To switch on again

Press ⏻, PROGR +/–, or one of the number buttons on the Remote Commander.

Switching off completely

Depress ⏻ (main power switch) on the TV unit.

Selecting TV Programmes

Press PROGR +/– or press the number buttons.

To select a double-digit number

Press –/--, then the numbers.
For example, if you want to choose 23, press –/--, 2, and 3.

Adjusting the Volume

Press 🔊 +/–.

Operating the TV Using the Buttons on the TV

With the –/+ buttons on the TV, you can select programmes, adjust the volume, and select video input sources.

To switch on the TV from the standby mode

Press the –/+ buttons.

To reset picture and sound controls to the factory preset level (RESET function)

Press the –/+ buttons simultaneously.

To select TV programmes

Press P repeatedly until the programme number appears, then press the –/+ button to select.

To adjust the volume

Press P repeatedly until the ◿ appears, then press the –/+ button to adjust. (See Fig. 15.)

To select video input sources

Press P repeatedly until the ↩ (video input indication) appears, then press the –/+ button to select. Each pressing the button, the indication changes as follows.

AV1→RGB→AV2→YC2
↑ ↓
YC4←AV4←YC3←AV3

After the video input source is selected, the ◿ appears. Press the –/+ button to adjust the volume. (See Fig. 16.)



Fig. 15

Fig. 16

Watching Teletext or Video Input

Watching teletext

1 Press ▤ to view the teletext.
2 For teletext operation, enter a 3-digit page number with the number buttons to select a page.
For teletext operation, press one of the coloured buttons.
For both operations, press ⊕ (PAGE +) for the next page or ⊖ (PAGE –) for the preceding page.
3 To go back to the normal TV picture, press ▢.

Watching a video input picture

1 Press ↩ repeatedly until the desired video input appears.
2 To go back to the normal TV picture, press ▢.

More Convenient Functions

Use the Full-Function side of the Remote Commander.

Displaying the on screen indications

- Press ⓘ once to display all the indications.
- Press ⓘ again to make the indications disappear.

Muting the sound

Press ✕.
To resume normal sound, press ✕ again.

Displaying the time

Press ▤. This function is available only when teletext is broadcast.
To make the time display disappear, press ▤ again.

For details of the teletext operation, refer to page 19.

For details of the video input picture, refer to page 23.

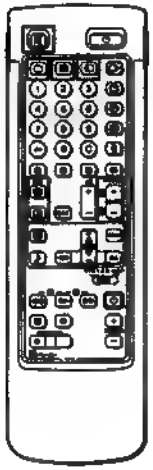

Adjusting and Setting the TV Using the Menu

PICTURE
SOUND

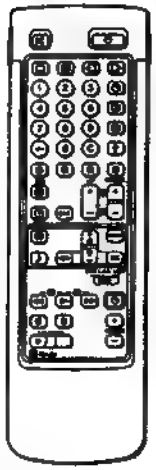

If you have made a mistake
Press ⇐ to go back to the previous position.
To go back to the main menu
Keep pressing ⇐.

Note
Hue is only available for NTSC colour systems.

Note on LINE OUT
The audio level and the dual sound mode output from the ⟳ jack on the rear correspond to the Headphone VOLUME and DUAL SOUND settings.

When watching a video input picture
You can select DUAL SOUND to change the sound.

Adjusting the Picture and Sound

Although the picture and sound are adjusted at the factory, you can adjust them to suit your own taste. You can also select dual sound (bilingual) programmes when available or adjust the sound for listening with the headphones.

1 Press ◐ (for picture) or ♪ (for sound) on the remote Commander.
or
Press MENU and select "PICTURE" or "SOUND," then press OK. The PICTURE ADJUSTMENT or SOUND ADJUSTMENT menu appears.
(See Fig. 17 or Fig. 18.)
2 Using △+ or ▽–, select the item you want to adjust and press OK.
To move up/down:
From ⓓ position, press ▽– to move down.
From ⓤ position, press △+ to move up.
ⓓ means next page.
ⓤ means previous page.
3 Adjust the setting with △+ or ▽– and press OK.
For the effect of each control, see the table below.
4 Repeat steps 2 and 3 to adjust other items.
5 Press MENU to return to TV picture.



Fig. 17



Fig. 18

Effect of each control

PICTURE ADJUSTMENT	Effect
◐ (contrast)	Less ——— More
☼ (brightness)	Darker ——— Brighter
● (colour)	Less ——— More
◿ (hue)	Greenish ——— Reddish
ⓘ (sharpness)	Softer ——— Sharper
RESET	Resets picture to the factory preset levels.
NOISE REDUCE	OFF: Normal ON: When reducing the picture noise
DIGITAL MODE	1: Line Flicker reduction on. 2: Line Flicker reduction off.

SOUND ADJUSTMENT	Effect
♩ (Treble)	Less ——— More
♪ (Bass)	Less ——— More
◺◿ (Balance)	More left ——— More right
RESET	Resets sound to the factory preset levels.
SPACE SOUND	OFF: Normal ON: Obtain acoustic sound effect.
LOUDNESS	OFF: Normal ON: When listening to low volume sound.
DUAL SOUND*	A: left channel B: right channel Stereo mono STEREO ↔ MONO The selected mode of the A-CD-B indicator on the TV lights up.
∩ (Headphones)	Less◿ ———

*When receiving a NICAM programme

NICAM stereo/monaural: STEREO NICAM → MONO
NICAM bilingual: NICAM A → NICAM B → MONO

GB

FEATURES

Using the SLEEP TIMER

You can select a time period after which the TV automatically switches into standby mode.

1 Press MENU to display the main menu.
2 Select "FEATURES" with △+ or ▽– and press OK.
The FEATURES menu appears.
3 Select "SLEEP TIMER" with + or ▽– and press OK. (See Fig. 19.)
The time period option changes colour.
4 Select the time period with △+ or ▽–.
The time period changes as follows:
OFF → 0:30 → 1:00 → 1:30 → 2:00
5 After selecting the time period, press OK.
The cursor moves back to the left margin and the timer starts counting.
One minute before the TV switches into standby mode, a message is displayed on the screen.
6 Press MENU to return to TV picture.

To switch off the timer
Select "OFF" in step 3.

To check the remaining time
Press .

Fig. 19

FEATURES

PARENTAL LOCK

You can prevent undesirable broadcasts from appearing on the screen. We suggest you use this function to prevent children from watching programmes which you consider unsuitable.

1 Select the TV programme which you want to block.
2 Press MENU to display the main menu.
3 Select "FEATURES" with △+ or ▽– and press OK.
The FEATURES menu appears.
4 Select "PARENTAL LOCK" with △+ or ▽– and press OK.
5 Select "ON" with △+ or ▽– and press OK. (See Fig. 20.)
6 Press MENU to return to TV picture.

If you try to select a programme that has been blocked
The message "LOCKED" appears on the blank TV screen.



Fig. 20

Cancelling PARENTAL LOCK

1 On the PARENTAL LOCK menu, select "OFF" with △+ or ▽–.
2 Press OK.

PIP (Picture In Picture)

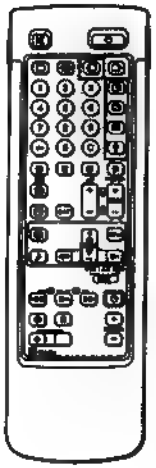

Note
RGB input source cannot be displayed in PIP.

With this function you can display a "PIP screen" (small picture) within the main TV picture. In this way you can watch or monitor the video output from any connected equipment (for example from a VTR) while watching TV or vice versa. For information about connection of other equipment, refer to page 22.



Switching PIP on and off

Press .
The PIP screen will be displayed. The PIP picture will come from the source chosen when the TV was last used.

To Switch PIP off
Press again.

Selecting a PIP source

1 Press ↑.
The symbol ↑ will be displayed at the bottom, left-hand corner of the screen.
2 Press -/ repeatedly until the desired PIP source is indicated (e.g. TV, AV1, AV2, YC2, AV3, YC3, AV4, YC4).

Note
If no video source has been connected, the PIP picture will be noisy.

Swapping screens

Press .
The main screen will switch the picture with the PIP screen.



Notes
- If a TV programme is on the PIP screen and a video source on the main picture, and you want to change channels, first press ↑ and then the programme number buttons or PROGR +/–.
- Swapping screens takes about 2 seconds after pressing .
- After swapping screens if the colour systems of the main and PIP pictures are different, the PIP picture first appears in black and white and then in colour.

Changing the position of the PIP

Press repeatedly to change the position of the PIP screen within the main screen. There are four different positions available.



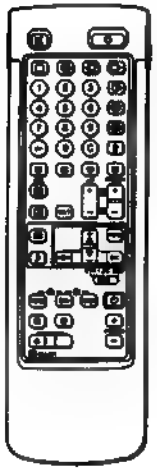

Displaying Frame-by-frame Pictures (PHOTO)

1 Press MENU to display the main menu.
2 Select "FEATURES" with △+ or ▽– and press OK.
The FEATURES menu appears. (See Fig. 21.)
3 Select "PHOTO" with △+ or ▽– and press OK. (See Fig. 22.)
The preset programme is displayed in nine separated screen in sequence. (See Fig. 23.)

To restore the normal picture

Press OK and MENU.

Fig. 21

Fig. 22

Fig. 23

Checking All the Preset Programmes (INDEX)

1 Press MENU to display the main menu.
2 Select "FEATURES" with △+ or ▽– and press OK.
The FEATURES menu appears. (See Fig. 24.)
3 Select "INDEX" with △+ or ▽– and press OK. (See Fig. 25.)
The nine preset programmes appear in the separated screen in sequence, switching the picture for each seconds. After all the nine programmes are displayed, each sequence switch the picture with the sound for each five seconds. Press △+ also switches to the next nine programmes. (See Fig. 26.)

To restore the normal picture

Press OK and MENU.

Fig. 24

Fig. 25



Fig. 26

Teletext

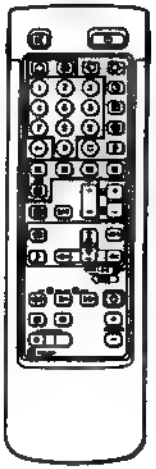

Note
Teletext errors may occur if the broadcasting signals are weak.

With the simple side of the Remote Commander
You can switch teletext on and off, operate Fastext, and directly select page numbers.

Note
Fastext operation is only possible, if the TV station broadcasts Fastext signals.

TV stations broadcast an information service called Teletext via the TV channels. Teletext service allows you to receive various information pages such as weather reports or news at any time you want. For advanced teletext operation, use the buttons on the Full-Function side of the Remote Commander.

Direct Access Functions

Switching Teletext on and off

1 Select the TV channel which carries the teletext broadcast you want to watch.
2 Press ⓣ to switch on teletext.
A teletext page will be displayed (usually the index page).
If there is no teletext broadcast, "No text available" is displayed on the information line at the top of the screen.

To switch teletext off

Press ○.

Selecting a teletext page

With direct page selection

Use the number buttons to input the three digits of the chosen page number.
If you have made a mistake, type in any three digits. Then re-enter the correct page number.
If the requested page is not available at that moment, a message will be displayed.

Accessing next or preceding page

Press ⊕ (PAGE+) or ⊖ (PAGE-).
The next or preceding page appears.

Superimposing the teletext display on the TV programme

- Press ⓣ once in teletext mode or twice in TV mode.
- Press ⓣ again to resume normal teletext reception.

Preventing a teletext page from being updated

- Press ⓗ (HOLD). The HOLD symbol "H" is displayed on the information line.
- Press ⓗ to resume normal teletext reception.

Using Fastext

With Fastext you can access pages with one key stroke.
When a Fastext page is broadcast, a colour-coded menu will appear at the bottom of the screen. The colours of this menu correspond to the red, green, yellow and blue buttons on the Remote Commander.
Press the corresponding coloured button on the Remote Commander which corresponds to the colour-coded menu. The page will be displayed after a few seconds.

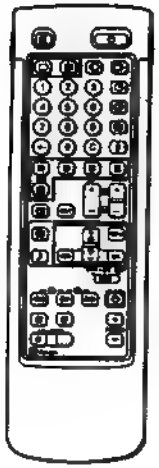

Note
Some of the features may not be available depending on the teletext service.

Using the Teletext Menu

This TV is provided with a menu-guided teletext system. When teletext is switched on, you can use the menu buttons to operate the teletext menu. Select the teletext menu functions in the following way:

1 Press MENU. The menu will be superimposed on the teletext display. (See Fig. 27.)

2 Using △+ or ▽–, select the teletext function you want and press OK.

INDEX

The index will give you an overview of the contents of the teletext and the page numbers.

ENLARGING

For convenient reading of a teletext page, you can enlarge the teletext display with the ability to scroll up and down. After having selected the function, an information line TOP/BOTTOM/FULL will be displayed. (See Fig. 28.)

To enlarge the upper half with "TOP", select "TOP" and hold down the ▽–. To enlarge the lower half with "BOTTOM," select "BOTTOM" and hold down the △+. The picture can be scrolled up to 12 steps in each direction. Press OK for "FULL" to resume the normal size.

Press ⏻ to resume normal teletext reception.

TEXT CLEAR

After selecting the function, you can watch a TV programme while waiting for a teletext page to be displayed. (See Fig. 29.)

Press ⏻ to resume normal teletext reception.

SUBTITLES

Your teletext service will inform you if a TV programme is subtitles.

After having selected the function the subtitles will be displayed.

REVEAL

Sometimes pages contain concealed information, such as answers to a quiz. The REVEAL option lets you disclose the information. After having selected the function, concealed information will be displayed.

By choosing REVEAL again on the menu, the concealed information will be canceled.

Press ⏻ to resume normal teletext reception.



Fig. 27

Fig. 28

Fig. 29

Press OK to select "OFF" for the TIME PAGE setting to cancel the request.

To cancel the request Select SUBPAGE and press OK.

Note:
"TIME PAGE" and "SUBPAGE" features may not be available depending on the teletext service.

TIME PAGE

Your teletext service will inform you, if a time coded page is available. You may have a page (e.g. an alarm page) displayed at a certain time.

1 Using △+ or ▽–, select "ON." Press OK.
The TV programme you were watching before you selected TIME PAGE is restored.
An information window will be displayed at the bottom of the page.

2 To select the desired page, enter three digits for the page number (e.g.452) using the number buttons and press OK.

3 To select the desired time, enter four digits for the desired time (e.g. 1800) using the number buttons and press OK.
The selected time is displayed at the top in the left-hand corner.
At the requested time, the page will be displayed.
Press ⏻ to resume normal teletext mode.

SUBPAGE

You may want to select a particular teletext page from several subpages which are rotated automatically. After having selected the function, an information line will be displayed.

To select the desired subpage, enter four digits using PROGR +/– or the number buttons (e.g. enter 0002 for the second page of a sequence).

GB

Connecting and Operating Optional Equipment

Connecting Optional Equipment

You can connect optional audio-video equipment to this TV such as a VCR, video disc player, and stereo system.

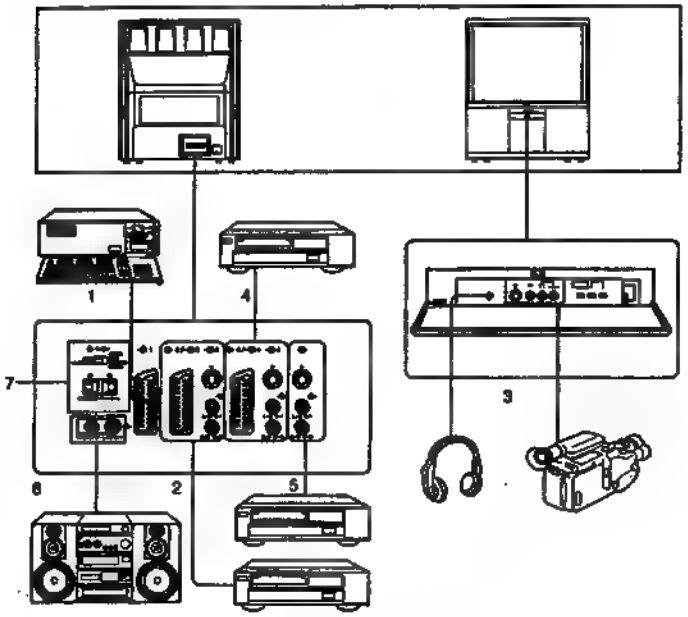

To connect a VCR using the 'T' terminal
Connect the aerial output of the VCR to the aerial terminal 'T' of the TV.
We recommend that you tune in the video signal to programme number "0." For details see "Preset channels manually" on page 9.

If the picture or the sound is distorted
Move the VCR away from the TV.

S-Video input (Y/C input)
Video signals may be separated into Y (luminance or brightness) and C (chrominance) signals. Separating the Y and C signals prevents them from interfering with one another, and therefore improves picture quality (especially luminance). This TV is equipped with 3 S Video input jacks through which these separated signals can be input directly.

When connecting a monaural VCR
Connect only the white -◁- jack to both the TV and VCR.

Acceptable input signal	Available output signal
1 Normal audio/video and RGB signal	Video/audio from TV tuner
2 Normal audio/video and S video signal	Video/audio from selected source
3 Normal audio/video and S video signal	No outputs
4 Normal audio/video and S video signal	Video/audio displayed on TV screen (monitor out)
5 No inputs	S-video/audio signal displayed on TV screen (monitor out)
6 No inputs	Audio signal (variable)
7 Centre speaker input. Select to CENTRE when TV set's speakers are used for external amplifier (e.g. Dolby amplifier). For normal operation, switch position is MAIN.	No outputs

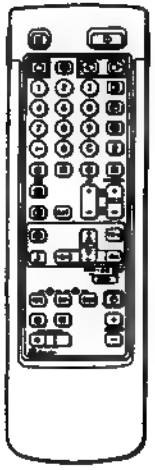

-◁-1 connector always outputs the audio and video signals from the 'T' aerial terminals.

▷-4/-◁-4 connector always outputs the audio and video signals which you are currently watching on the TV screen (i.e. monitor output).

Selecting Input

This section explains how to view the video input picture (of the video source connected to your TV).

Press -◁- repeatedly to select the input source.

The symbol of the selected input source will appear. (See Fig. 30.)

To go back to the normal TV picture

Press ○.

Fig. 30

Symbol	Input signal
-◁-1	Audio/video input through the -◁-1 connector
-◁-	Audio/RGB input through the -◁-1 connector
-◁-2	Audio/video input through the ▷-2/ -◁-2 connector
-◁-2	Audio/S video input through the ▷-2/ -◁-2 or -◁-2 connector (4-pin connector)
-◁-3	Audio/video input through -◁-3 and -◁-3 on the front
-◁-3	Audio/S video input through the -◁-3 (4-pin connector) and -◁-3 connectors
-◁-4	Audio/video input through the ▷-4/ -◁-4 connector
-◁-4	Audio/S video input through the ▷-4/ -◁-4 or -◁-4 connector(4-pin connector)

You can also select the input mode using the P◁▷ and -/+ buttons on the TV. In this case, first select -◁-, and then press -/+ buttons to select the input.

Selecting Output from the ▷-2/-◁-2 Connector

You can select the output signal from the ▷-2/-◁-2 connector. The ▷-2/-◁-2 connector outputs the input signals from the other connectors as indicated below.

Press ▷- repeatedly to select the output.

The symbol of the selected output source appears. (See Fig. 31.)

Fig. 31

Symbol	Output signal of the ▷-2/-◁-2 connector
1 ▷-	Audio/video signal from the -◁-1 connector
2 ▷-	Audio/video signal from the ▷-2/-◁-2 connector
2 ◁▷-	Audio/S video signal from the ▷-2/-◁-2 or -◁-2 connector (4 pin)
3 ▷-	Audio/video signal from the -◁-3, -◁-3 connectors
3 ◁▷-	Audio/S video signal from the -◁-3, -◁-3 connectors
4 ▷-	Audio/video signal from the ▷-4/ -◁-4 connector
4 ◁▷-	Audio/S video signal from the ▷-4/-◁-4 or -◁-4 connector (4 pin)
TV▷-	Audio/video signal from the 'T' aerial terminal

GB

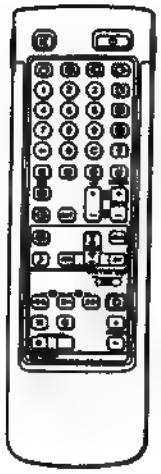

When recording
When you use the ● (record) button, make sure to press this button and the one to the right of it simultaneously.

Remote Control of Other Sony Equipment

You can use the TV Remote Commander to control most of Sony remote-controlled video equipment such as: beta, 8 mm and VHS VCRs and video disc players.

Tuning the Remote Commander to the equipment

1 Set the VTR 1/2/3 MDP selector according to the equipment you want to control:

VTR 1: Beta VCR
VTR 2: 8 mm VCR
VTR 3: VHS VCR
MDP: Video disc player

2 Use the buttons indicated in the illustration to operate the additional equipment.
If your video equipment is furnished with a COMMAND MODE selector, set this selector to the same position as the VTR 1/2/3 MDP selector on the TV Remote Commander.
If the equipment does not have a certain function, the corresponding button on the Remote Commander will not operate.

For Your Information

Optimum Viewing Area

For the best picture quality, try to position the projection TV so that you can view the screen from within the areas shown below.

Horizontal viewing area

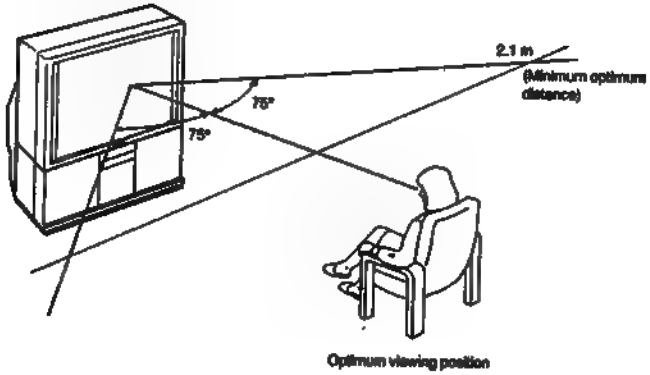

Vertical viewing area

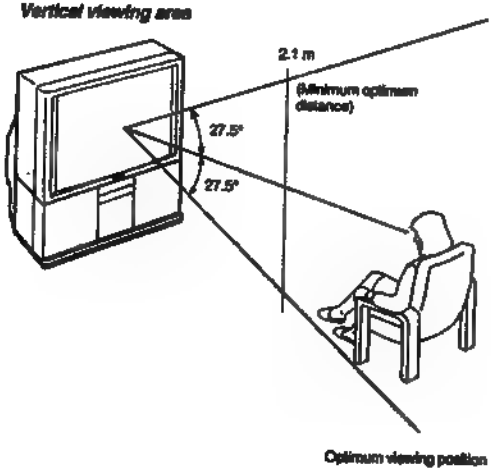

SECTION 2
DISASSEMBLY

2-1-1. BACK COVER REMOVAL

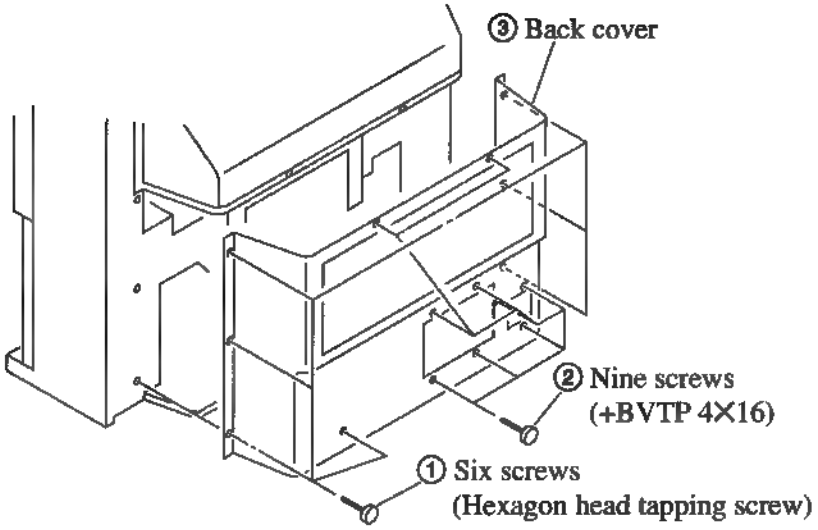

2-1-2. CHASSIS ASSY REMOVAL

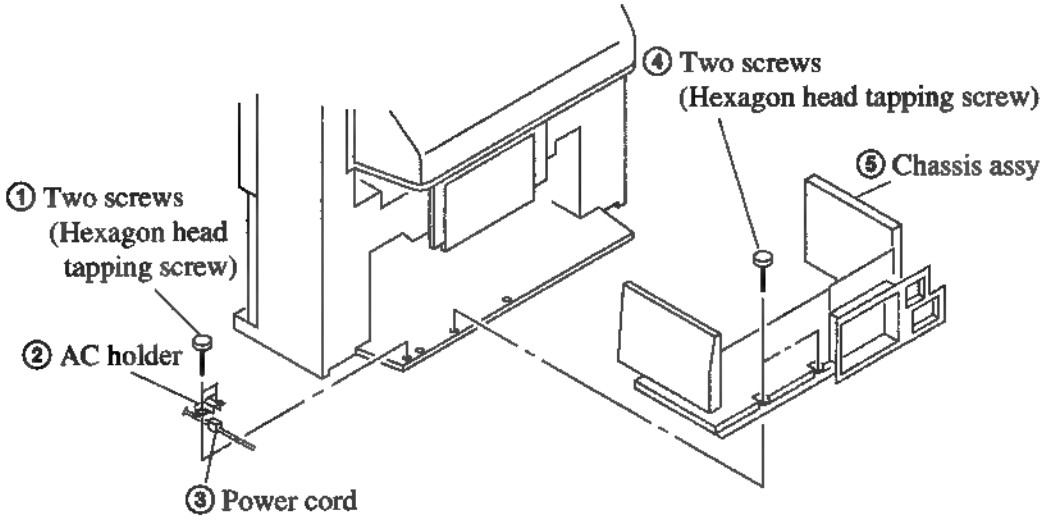

2-1-3. SERVICE POSITION

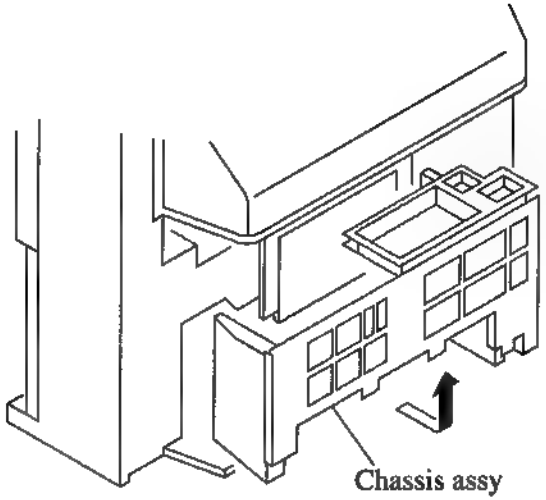

2-1-4. G BOARD REMOVAL

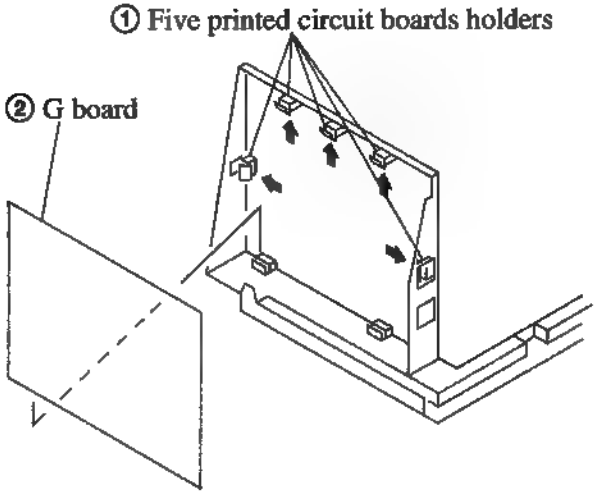

2-1-5. U BOARD REMOVAL

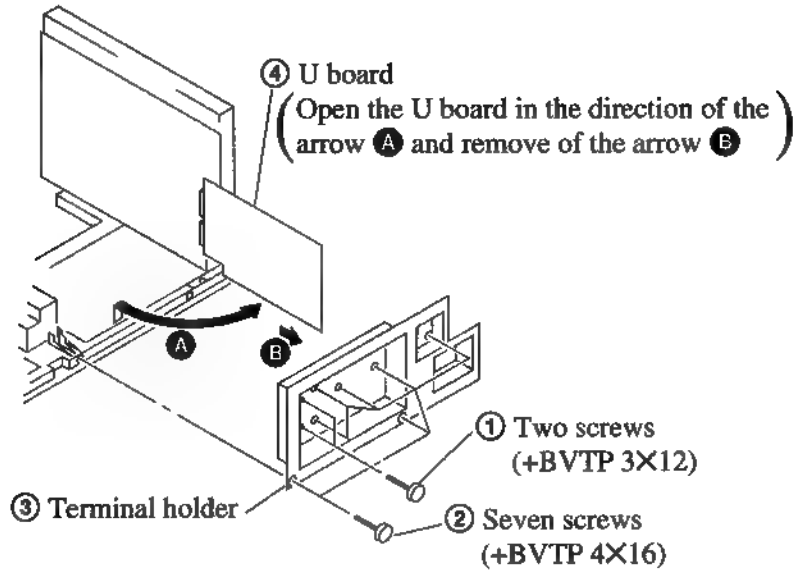

2-1-6. B BOARD REMOVAL

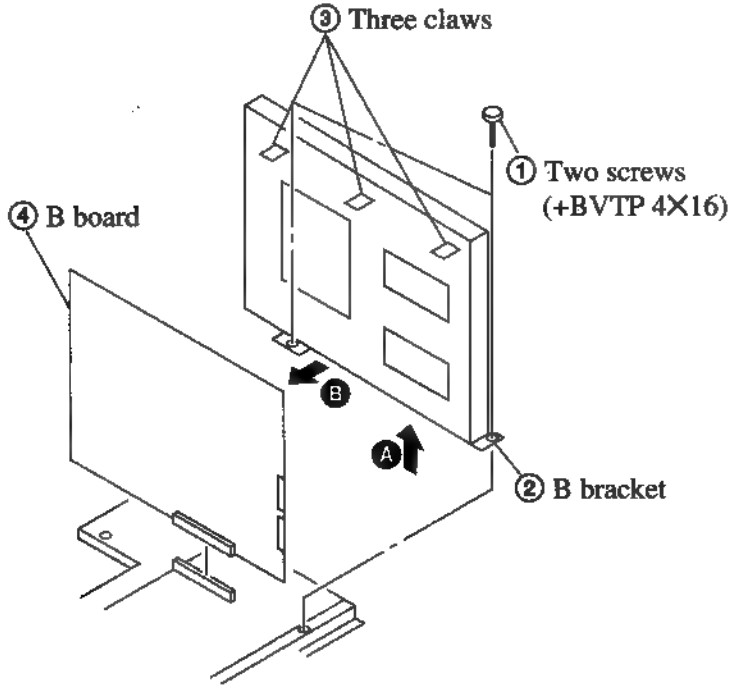

2-1-7. HA AND HB BOARDS REMOVAL

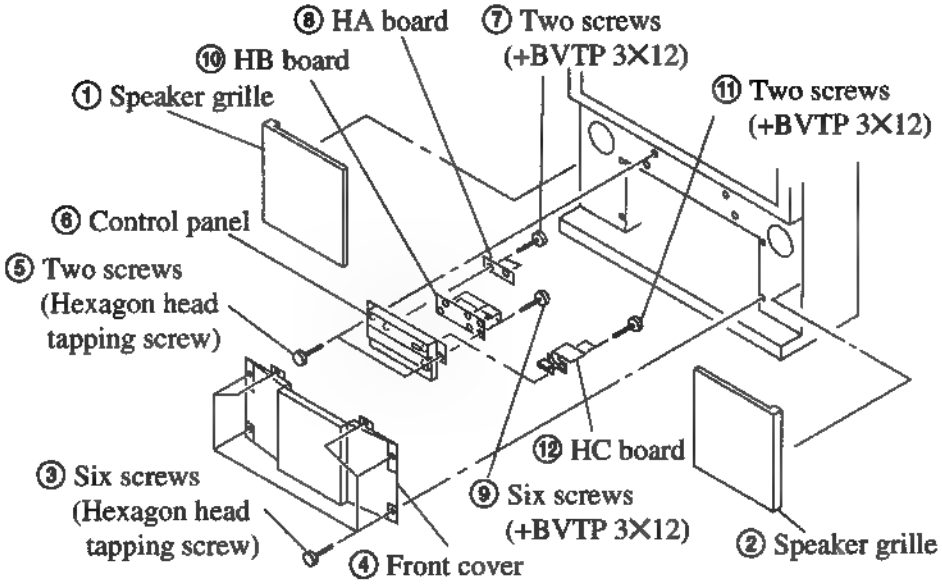

2-1-8. BEZNET ASSY REMOVAL

(1) KP-46S4/46S4K/46S4U

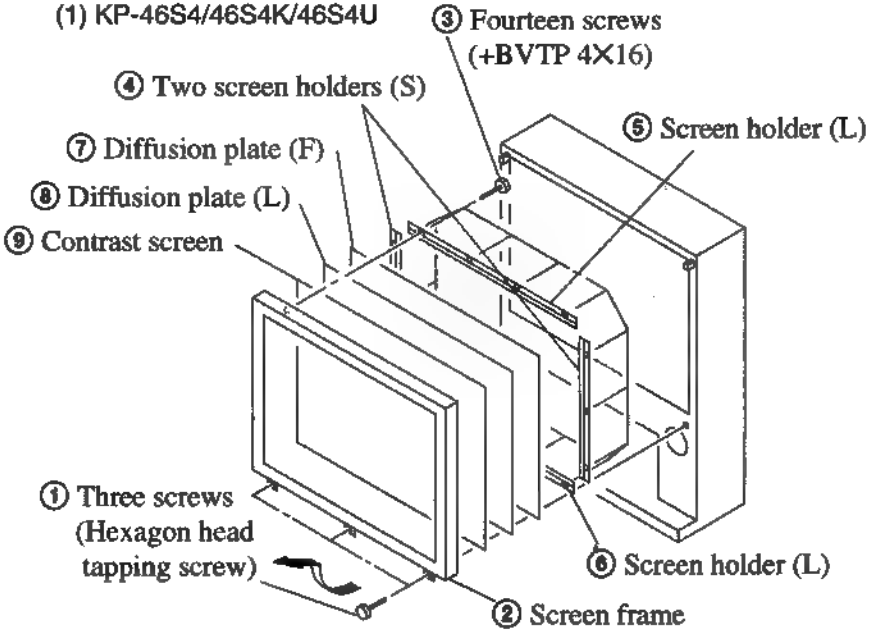

(2) KP-53S4/53S4K/53S4U

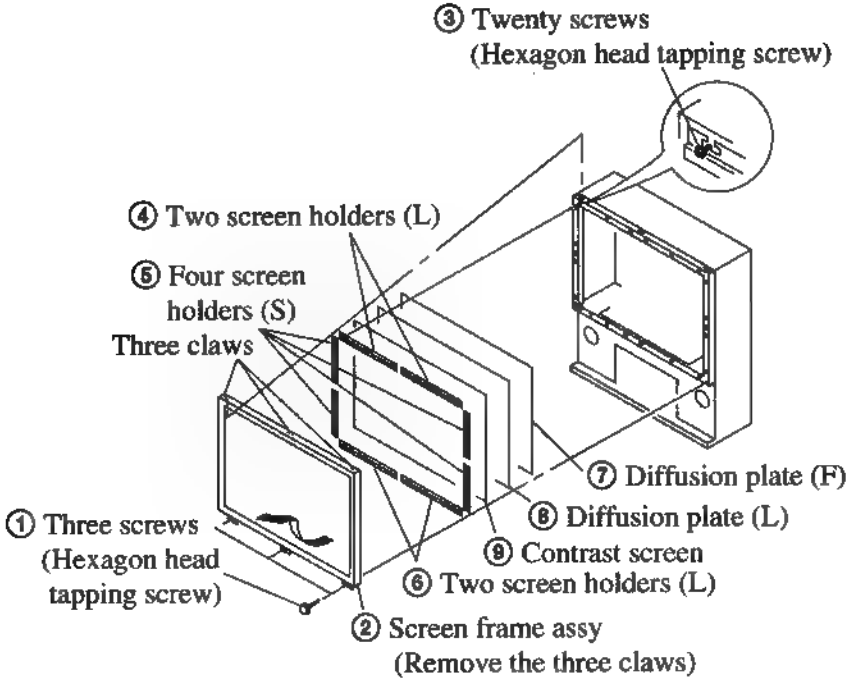

2-1-9. MIRROR COVER ASSY REMOVAL

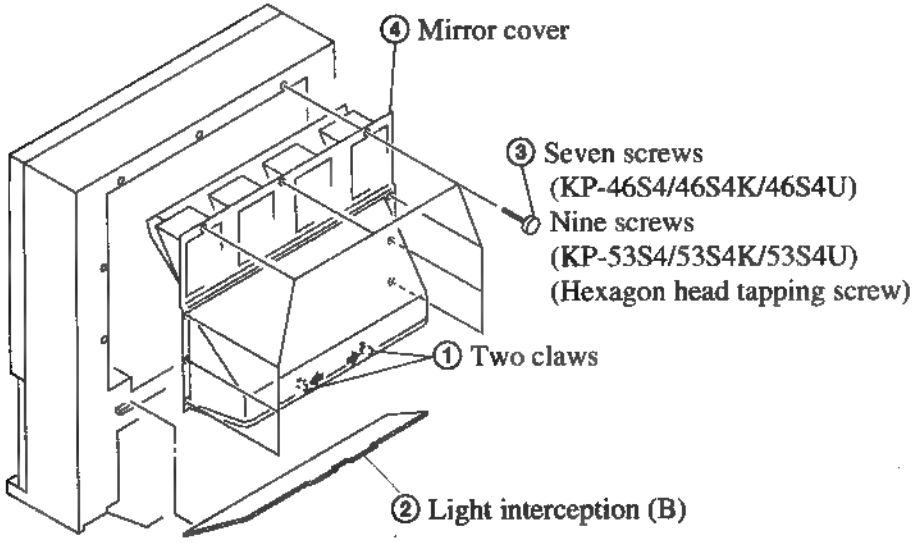

2-1-10. HIGH-VOLTAGE CABLE INSTALLATION AND REMOVAL

(1) Remover



(2) Installation



2-1-11. PICTURE TUBE REMOVAL

CAUTION

Removing the arrow-marked screws is strictly prohibit.
If removed, it many cause liquid spill.

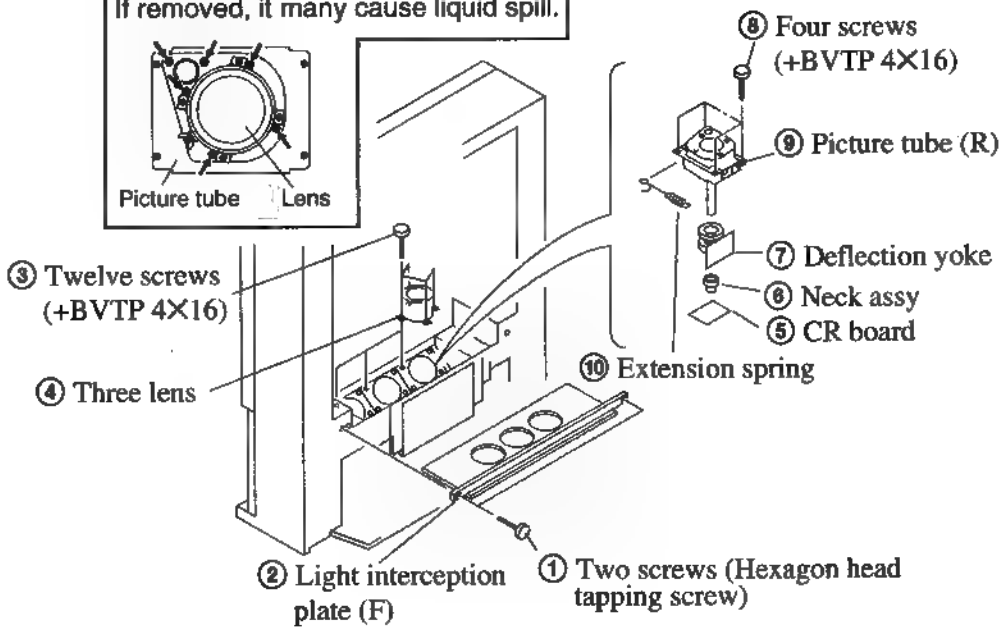

2-2.SERVICE STAY ASSY HOW TO USE AND CARRY BACK SERVICE STAY ASSY

2-2-1. SERVICE STAY ASSY (X-4034-033-2)

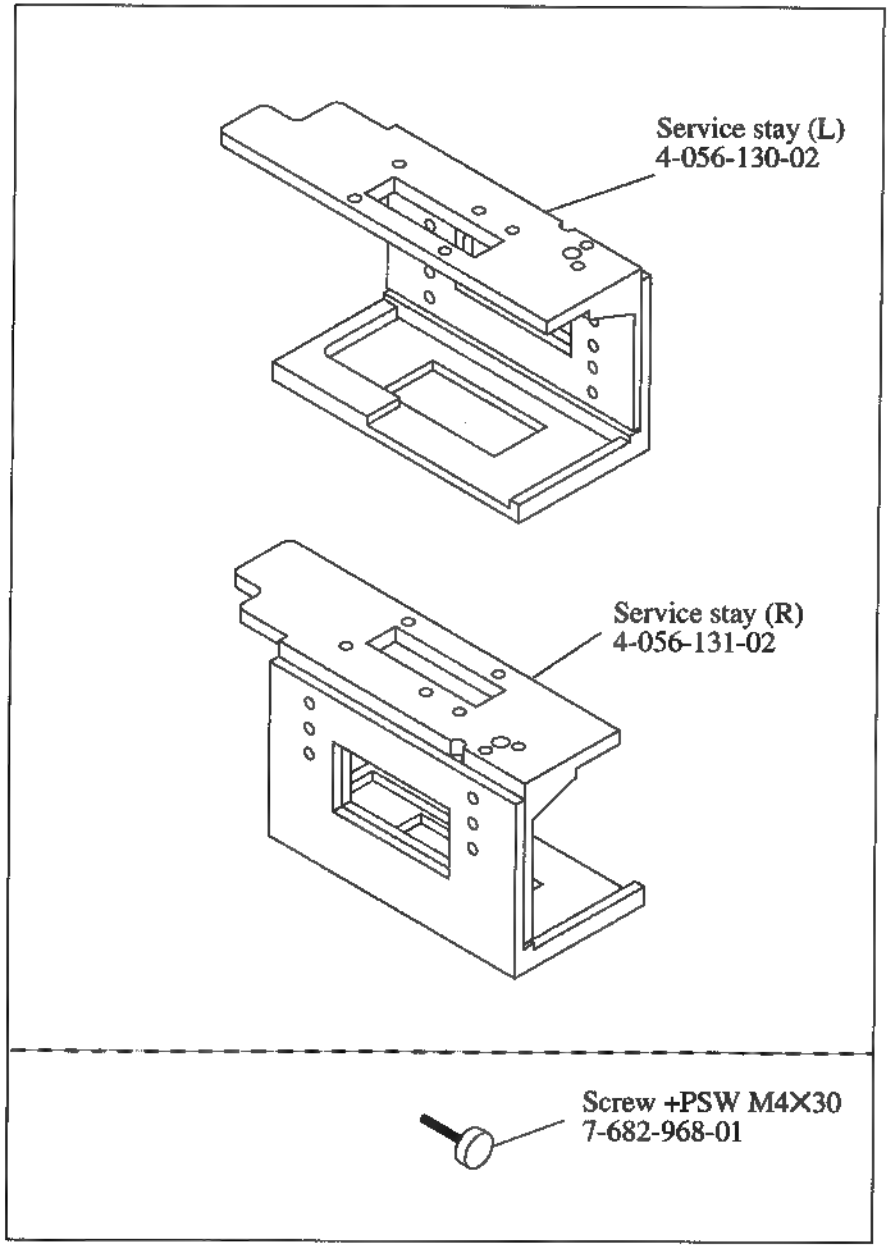

2-2-2.CONTROL PANEL REMOVAL

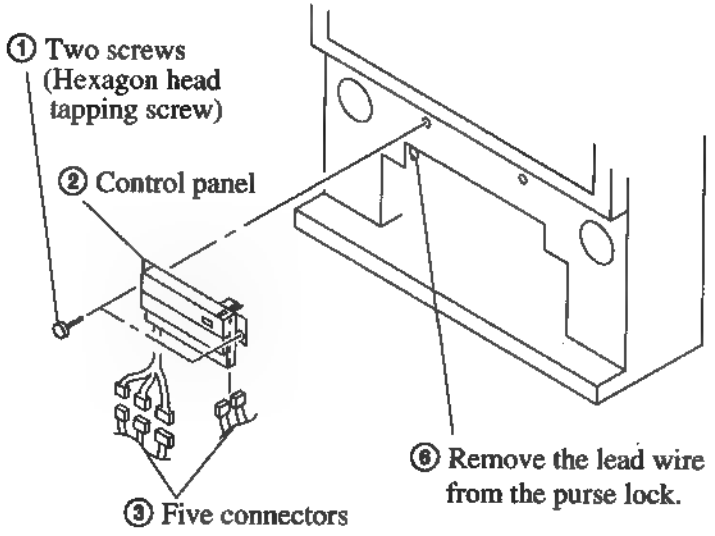

2-2-3. CABINET REMOVAL

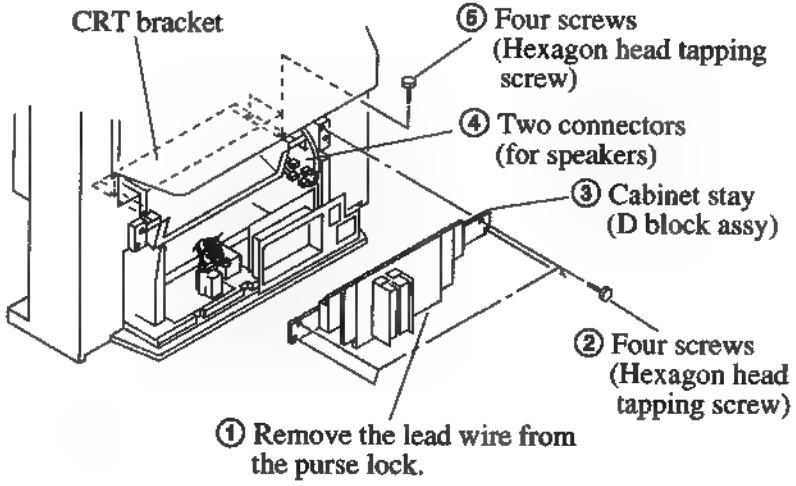

2-2-4. SETTING OF STAY ASSY

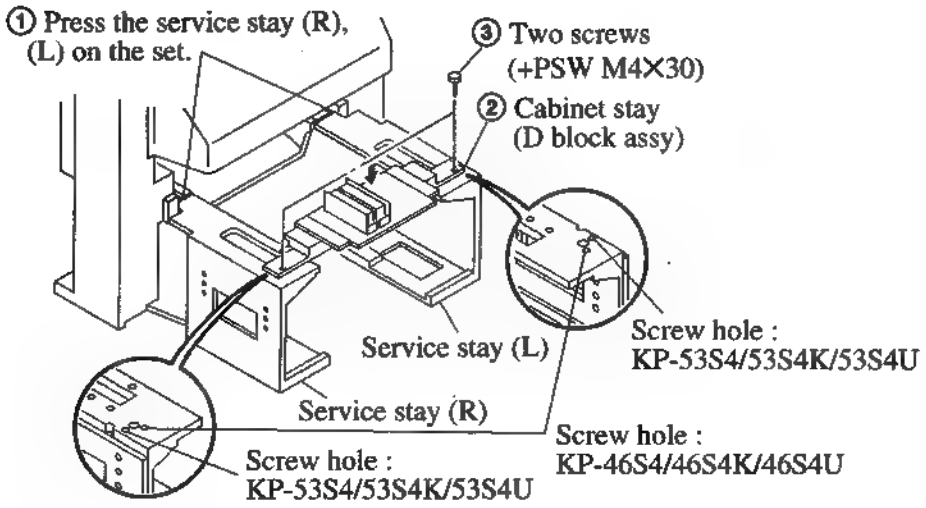

2-2-5. INSTALL A CHASSIS ASSY

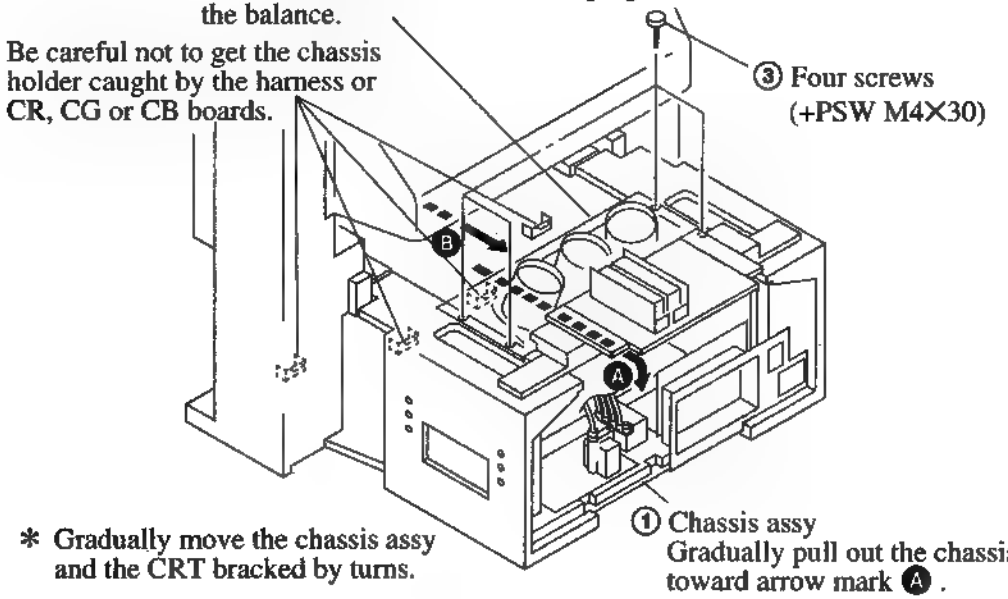

2-2-6. CARRY BACK SERVICE STAY ASSY

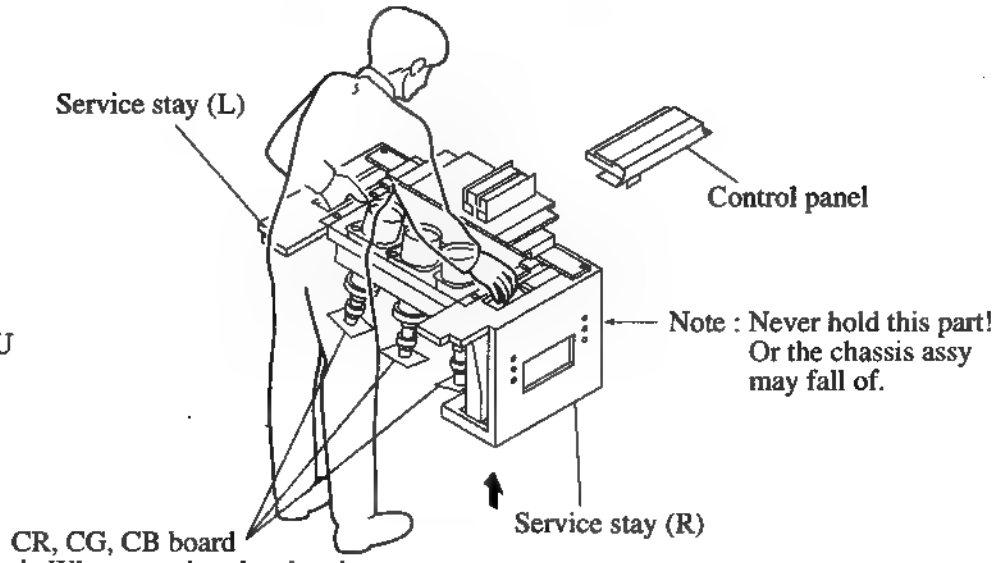

* When carrying the chassis assy, be careful not to touch the CR, CG or CB boards with your legs.

* Even with 2 servicemen, be sure to put your hands into the grooves on the top of service stays (L) and (R) to carry the chassis assy.
* To hold the chassis assy, put your hands into the grooves on the top of service stays (L) and (R).

SECTION 3
SET-UP ADJUSTMENTS

ADJUSTMENT ITEM AND PROCEDURE	EQUIPMENT AND SIGNAL	MEASUREMENT POSITION	ADJUSTMENT LOCATION	ILLUSTRATION AND SHAPE AND NUMBER
SCREEN VOLTAGE ADJUSTMENT (ROUGH ALIGNMENT) 1. Turn the red VR on the FOCUS block all the way to the left and then gradually turn it to the right until the point where you can see the retrace line. 2. Next gradually turn it to the left to the position where the retrace line disappears. **FOCUS LENS ADJUSTMENT** 1. Loosen the lens screw. 2. Set in service mode. 3. Use VSP on the service mode menu to show only the green colour. 4. Press the Commander Menu button and select FEATURES and CONVERGENCE to display the test signal on the screen. 5. Rotate the green lens and align with the optimal focus point from the test signal. 6. Use RRH from the service mode menu to set to green and red. 7. Disply the test signal and rotate the red lens to obtain the optimum focus at the point where the red and green spots overlap. 8. Use RBH from the service mode menu to set to red and blue. 9. Disply the test signal and rotate the blue lens to obtain the optimum focus at the point where the blue and red spots overlap. 10. Tighten the lens screw. **SCREEN (G2) ADJUSTMENT** 1. Select VIDEO mode without signals. 2. Connect an oscilloscope to the TP7103(KR), TP7203(KG) and TP7303(KB) of CR board, CG board and CB board. 3. Adjust R to 172±2Vdc G to 170±2Vdc B to 164±1Vdc by rotating screen VR on the focus block.	Monoscope Pattern		PICTURE .....minimum BRIGHTNESS .....50% SCREEN (G2)	 FOCUS block  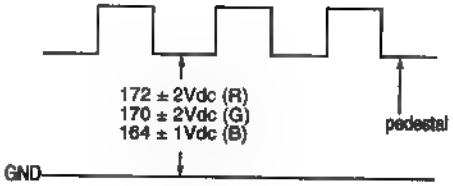

ADJUSTMENT ITEM AND PROCEDURE	EQUIPMENT AND SIGNAL	MEASUREMENT POSITION	ADJUSTMENT LOCATION	ILLUSTRATION AND SHAPE AND NUMBER
FOCUS VR ADJUSTMENT 1. Set in service mode. 2. Use VSP on the service mode menu to show only the green colour. 3. Press the Commander Menu button (convergence) and output the test signal. 4. Rotate the green VR on the FOCUS block and align to obtain the optimal focus point. 5. Use RRH from the service mode menu to set to green and red. 6. Disply the test signal and rotate the red VR to obtain the optimum focus at the point where the red and green spots overlap. 7. Use RBH from the service mode menu to set to red and blue. 8. Disply the test signal and rotate the blue VR aligning to obtain the optimum focus at the point where the blue and green spots overlap.				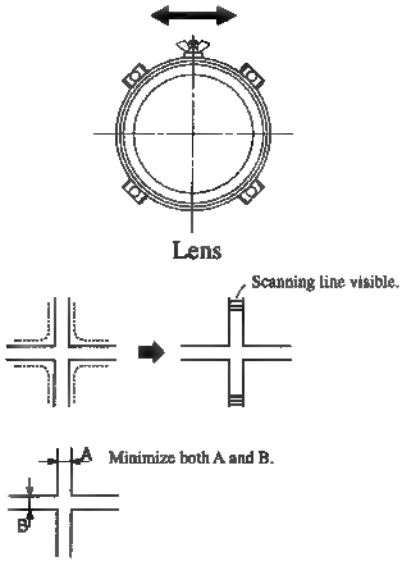
DEFLECTION YOKE TILT ADJUSTMENT 1. Set in service mode. 2. Set to receive the monoscope signal. 3. Use VSP on the service mode menu to show only the green colour. 4. Loosen the deflection yoke set screw and align the tilt of the deflection yoke so that the bars at the centre of the monoscope pattern are horizontal. 5. After aligning the deflection yoke, fasten it securely to the funnel-shaped portion (neck) of the CRT. 6. The tilt of the deflection yoke for red is aligned with RRH on the service mode menu, and the tilt on the deflection yoke for blue is aligned with RBH on the service menu, is aligned the same as was done for green.	Monoscope pattern			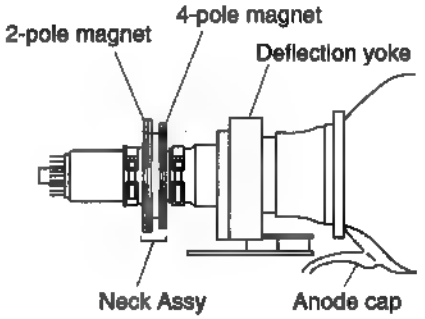

ADJUSTMENT ITEM AND PROCEDURE	EQUIPMENT AND SIGNAL	MEASUREMENT POSITION	ADJUSTMENT LOCATION	ILLUSTRATION AND SHAPE AND NUMBER
2-POLE MAGNET ADJUSTMENT 1. Set in service mode. 2. Set to receive the dot pattern signal. 3. Place the caps on the red and blue lens so that only the green colour is showing. 4. Turn the green VR on the focus block to the right and set to overfocus to enlarge the spot. 5. Now align the 2-Pole Magnet so that the enlarged spot is in the center of the Just Focus spot. 6. Align the green focus VR and set for just (precise) focus. 7. Perform the same alignment for red and blue.	Dot pattern		2-pole magnet	Use the center dot 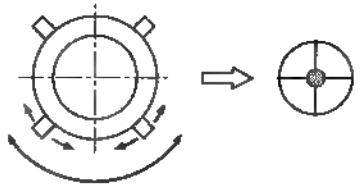
4-POLE MAGNET ADJUSTMENT 1. Set in service mode. 2. Set to receive the dot pattern signal. 3. Place the caps on the red and blue lens so that only the green colour is showing. 4. Turn the green VR on the focus block to the left and set to underfocus to enlarge the spot. 5. Now align the 4-Pole Magnet so that the enlarged spot becomes a perfect circle.	Dot pattern		4-pole magnet	Use the center dot 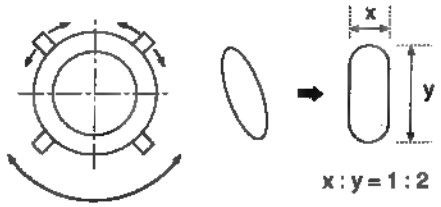
DEFOCUS ADJUSTMENT 1. Receive the crosshatch signal. 2. Adjust the FOCUS knob so that the crosshatch pattern vertical line width is as in the figure on the right. 3. Blue only defocus Adjustment.	Crosshatch pattern		FOCUS VR • RED • GREEN • BLUE	• Focus adjustment point 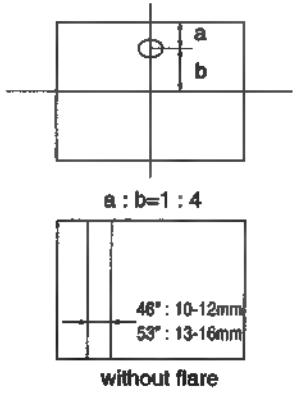

ELECTRICAL ADJUSTMENT BY REMOTE COMMANDER

By using Remote Commander (RM-831),all circuit adjustments can be made.

NOTE : Test Equipment Required.

1. Pattern Generator
2. Frequency counter
3. Digital multimeter
4. Audio oscillator

1. METHOD OF SETTING THE SERVICE ADJUSTMENT MODE

SERVICE MODE PROCEDURE

1. Standby mode. (Power off)
2. DISPLAY → 5 → VOL (+) → TV POWER on the Remote Commander.
   (+ → 5 → ◢ → ▢) (Press each button within a second.)

SERVICE MODE ADJUSTMENT

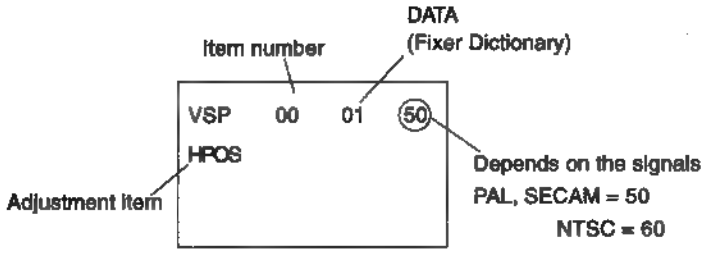

3. The CRT displays the item being adjusted.
4. Press 1 or 4 on the Remote Commander to select the item.
5. Press 3 or 6 on the Remote Commander to change the data.
6. If you want to recover the latest values press 7 then 0 to read the memory.
7. Press MUTING then 0 to write into memory.

SERVICE ADJUSTMENT MODE MEMORY

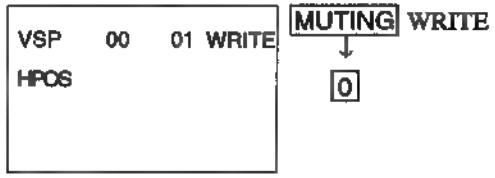

8. Press 8 then 0 on the Remote Commander to initialize.
9. Turn set off and on to exit.

2. AFTER IC401 (NON VOLATILE MEMORY) REPLACEMENT

1. Enter to Service Mode.
2. Press 5 and 0 of the commander to initialize data.
3. Adjust standard data to call each item number with 3 and 6 of the commander.
   Write the data per each item number (MUTING + 0)
4. Select CP2 items menu and respectively set the data with 3 and 6 of the commander.

	Item number	Adjustment item	AEP	UK	(OIRT)
CP2	03	B/G	1	1	1
	04	I	1	1	1
	05	IRE	0	1	0
	06	D/K	1	0	1
	07	AUS	0	0	0
	08	L	1	1	1

   Press MUTING + 0 of the commander to write the data.
5. Select item CSET of TXT menu and set the data with 3 and 6 of the commander.

TXT	14	CSET	3 : West (AEP/UK), 5 : EAST(K) 6 : GREEK

   Press MUTING + 0 of the commander to write the data.
6. Press 8 and 0 of the commander to make the user control data standard.

3. ADJUST BUTTONS AND INDICATOR

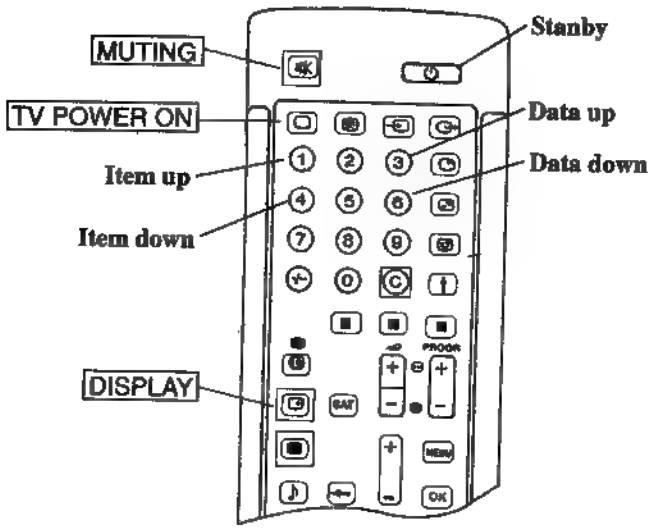

RM-831

4. SERVICE MODE LIST

VSP

	Item number	Adjustment item	Data range	Initial data	Note	Device
VSP	00	HPOS	0 ~ 63	51	H-SHIFT	CXD2018Q
	01	VSIZ	0 ~ 63	24	V-SIZE	
	02	VPOS	0 ~ 63	24	V-SHIFT	
	03	VSCO	0 ~ 15	8	S-CORRECTION	
	04	VLIN	0 ~ 15	10	V-LINEARITY	
	05	HSIZ	0 ~ 63	[illegible]	H-SIZE	
	06	HIPN	0 ~ 63	38	PIN-AMP	
	07	HKEY	0 ~ 31	9	TILT	
	08	UPCP	0 ~ 15	7	UPPER CORNER PIN	
	09	LOCP	0 ~ 15	10	LOWER CORNER PIN	
	[illegible]	HBOW	0 ~ 15	7	V-BOW	
	11	HSKE	0 ~ 15	9	V-ANGLE	

DP

	Item number	Adjustment item	Data range	Initial data	Note	Device
R GH	00	CENT	–127 ~ +128	20	GREEN. H CENTER	CXP85112B-613S
	01	SKEW	–127 ~ +128	0	GREEN. H SKEW	
	02	BOW	–127 ~ +128	0	GREEN. H BOW	
	03	4BOW	–127 ~ +128	0	GREEN. H 4th BOW	
	04	SIZE	–127 ~ +128	0	GREEN. H SIZE	
	05	LIN	–127 ~ +128	7	GREEN. H LINEARITY	
	06	MSIZ	–127 ~ +128	–5	GREEN. H MIDDLE SIZE	
	07	MLIN	–127 ~ +128	–1	GREEN. H MIDDLE LINEARITY	
	08	KEY	–127 ~ +128	0	GREEN. H KEY	
	09	SSKW	–127 ~ +128	0	GREEN. H SUB SKEW	
	10	MPIN	–127 ~ +128	30	GREEN. H MIDDLE PIN	
	11	PIN	–127 ~ +128	0	GREEN. H PIN	
	12	SBOW	–127 ~ +128	0	GREEN. H SUB BOW	
	13	MBOW	–127 ~ +128	0	GREEN. H MIDDLE BOW	
	14	4PIN	–127 ~ +128	–3	GREEN. H 4th PIN	
	15	4SBOW	–127 ~ +128	0	GREEN. H 4th SUB BOW	
R GV	00	CENT	–127 ~ +128	0	GREEN. V CENTER	CXP85112B-613S
	01	SKEW	–127 ~ +128	0	GREEN. V SKEW	
	02	BOW	–127 ~ +128	2	GREEN. V BOW	
	03	SIZE	–127 ~ +128	0	GREEN. V SIZE	
	04	LIN	–127 ~ +128	4	GREEN. V LINEARITY	
	05	MSIZ	–127 ~ +128	0	GREEN. V MIDDLE SIZE	
	06	MKEY	–127 ~ +128	0	GREEN. V MIDDLE KEY	
	07	KEY	–127 ~ +128	10	GREEN. V KEY	
	08	SSKW	–127 ~ +128	0	GREEN. V SUB SKEW	
	09	MPIN	–127 ~ +128	25	GREEN. V MIDDLE PIN	
	10	PIN	–127 ~ +128	–20	GREEN. V PIN	
	11	SBOW	–127 ~ +128	–2	GREEN. V SUB BOW	
	12	WAVE	–127 ~ +128	0	GREEN. V WAVE	
	13	4PIN	–127 ~ +128	10	GREEN. V 4th PIN	
R RH	00	CENT	–127 ~ +128	–30	RED. H CENTER	CXP85112B-613S
	[illegible]	SKEW	–127 ~ +128	0	RED. H SKEW	
	02	BOW	–127 ~ +128	0	RED. H BOW	
	03	4BOW	–127 ~ +128	0	RED. H 4th BOW	
	04	SIZE	–127 ~ +128	0	RED. H SIZE	
	05	LIN	–127 ~ +128	–10	RED. H LINEARITY	
	06	MSIZ	–127 ~ +128	–5	RED. H MIDDLE SIZE	
	07	MLIN	–127 ~ +128	–5	RED. H MIDDLE LINEARITY	
	08	KEY	–127 ~ +128	–5	RED. H KEY	
	09	SSKW	–127 ~ +128	0	RED. H SUB SKEW	
	[illegible]	MPIN	–127 ~ +128	30	RED. H MIDDLE PIN	
	11	PIN	–127 ~ +128	[illegible]	RED. H PIN	

	Item number	Adjustment item	Data range	Initial data	Note	Device
RRH	12	SBOW	–127 ~ +128	30	RED. H SUB BOW	CXP85112B-613S
	13	MBOW	–127 ~ +128	3	RED. H MIDDLE BOW	
	14	4PIN	–127 ~ +128	–3	RED. H 4th PIN	
	15	4SBOW	–127 ~ +128	–2	RED. H 4th SUB BOW	
R RV	00	CENT	–127 ~ +128	[illegible]	RED. V CENTER	CXP85112B-613S
	01	SKEW	–127 ~ +128	0	RED. V SKEW	
	02	BOW	–127 ~ +128	2	RED. V BOW	
	03	SIZE	–127 ~ +128	0	RED. V SIZE	
	04	LIN	–127 ~ +128	[illegible]	RED. V LINEARITY	
	05	MSIZ	–127 ~ +128	0	RED. V MIDDLE SIZE	
	06	MKEY	–127 ~ +128	10	RED. V MIDDLE KEY	
	07	KEY	–127 ~ +128	10	RED. V KEY	
	08	SSKW	–127 ~ +128	0	RED. V SUB SKEW	
	09	MPIN	–127 ~ +128	25	RED. V MIDDLE PIN	
	10	PIN	–127 ~ +128	5	RED. V PIN	
	11	SBOW	–127 ~ +128	–2	RED. V SUB BOW	
	12	WAVE	–127 ~ +128	15	RED. V WAVE	
	13	4PIN	–127 ~ +128	10	RED. V 4th PIN	
R BH	00	BSEL	0/1	0	RESISTRATION μ CON BSEL	CXP85112B-613S
	01	CENT	–127~ +128	30	BLUE. H CENTER	
	02	SKEW	–127 ~ +128	0	BLUE. H SKEW	
	03	BOW	–127 ~ +128	0	BLUE. H BOW	
	04	4BOW	–127 ~ +128	[illegible]	BLUE. H 4th BOW	
	05	SIZE	–127 ~ +128	–1	BLUE. H SIZE	
	06	LIN	–127 ~ +128	–10	BLUE. H LINEARITY	
	07	MSIZ	–127 ~ +128	–5	BLUE. H MIDDLE SIZE	
	08	MLIN	–127 ~ +128	5	BLUE. H MIDDLE LINEARITY	
	09	KEY	–127 ~ +128	0	BLUE. H KEY	
	10	SSKW	–127 ~ +128	0	BLUE. H SUB SKEW	
	11	MPIN	–127 ~ +128	30	BLUE. H MIDDLE PIN	
	12	PIN	–127 ~ +128	0	BLUE. H PIN	
	13	SBOW	–127 ~ +128	–30	BLUE. H SUB BOW	
	[illegible]	MBOW	–127 ~ +128	–3	BLUE. H MIDDLE BOW	
	15	4PIN	–127 ~ +128	–3	BLUE. H 4th PIN	
	16	4SBOW	–127 ~ +128	2	BLUE. H 4th SUB BOW	
R BV	00	CENT	–127 ~ +128	0	BLUE. V CENTER	CXP85112B-613S
	01	SKEW	–127 ~ +128	0	BLUE. V SKEW	
	02	BOW	–127 ~ +128	2	BLUE. V BOW	
	03	SIZE	–127 ~ +128	–10	BLUE. V SIZE	
	04	LIN	–127 ~ +128	0	BLUE. V LINEARITY	
	05	MSIZ	–127 ~ +128	0	BLUE. V MIDDLE SIZE	
	06	MKEY	–127 ~ +128	–10	BLUE. V MIDDLE KEY	

	Item number	Adjustment item	Data range	Initial data	Note	Device
R BV	07	KEY	–127 ~ +128	0	BLUE. V KEY	CXP85112B-613S
	08	SSKW	–127 ~ +128	0	BLUE. V SUB SKEW	
	09	MPIN	–127 ~ +128	25	BLUE. V MIDDLE PIN	
	10	PIN	–127 ~ +128	0	BLUE. V PIN	
	11	SBOW	–127 ~ +128	[illegible]	BLUE. V SUB BOW	
	12	WAVE	–127 ~ +128	–15	BLUE. V 3th WAVE	
	13	4PIN	–127 ~ +128	[illegible]	BLUE. V 4th PIN	

D/A

	Item number	Adjustment item	Data range	Initial data	Note	Device
D/A	00	BKU	0 – 63	63	V.BLK UP-SIDE	CXA1315PM
	01	BKD	0 – 63	0	V.BLK DOWN-SIDE	

MCD

	Item number	Adjustment item	Data range	Initial data	Note	Device
MCD	00	MHUE	0 ~ 31	[illegible]	SUB HUE OF MAIN PICTURE	TDA9141
	01	YDLT	0 ~ 15	7	Y DELAY	TDA9143

SCD

	Item number	Adjustment item	Data range	Initial data	Note	Device
SCD	00	SHUE	0 ~ 31	15	SUB HUE OF SUB PICTURE	TDA9160

RGB

	Item number	Adjustment item	Data range	Initial data	Note	Device
RGB	00	SCOL	0 ~ 15	4	SUB COLOUR	TDA4780
	01	SBRT	0 ~ 63	27	SUB BRIGHT	
	02	RAMP	0 ~ 63	31	RED GAIN	
	03	GAMP	0 ~ 63	31	GREEN GAIN	
	04	BAMP	0 ~ 63	31	BLUE GAIN	
	05	RCUT	0 ~ 63	31	RED LEVEL REFERENCE	
	06	GCUT	0 ~ 63	31	GREEN LEVEL REFERENCE	
	07	BCUT	0 ~ 63	31	BLUE LEVEL REFERENCE	
	08	PDL	0 ~ 63	31	PEAK DRIVE LIMITER	
	09	GNMA	0 ~ 63	0	GAMMA	
	[illegible]	ADBL	0/1	0	ADAPTIVE BLACK	
	11	RELC	0/1	1	RELATIVE TO CUT-OFF	
	12	TCPL	0/1	1	TIME CONSTANT PEAK DRIVE LIMITER	

PIP

	Item number	Adjustment item	Data range	Initial data	Note	Device
PIP	00	RDV	0 ~ 15	8	V READ DELAY	SDA9188-3X
	01	RDH	0 ~ 63	16	H READ DELAY	
	02	FRY	0 ~ 15	3	BRIGHTNESS OF THE BORDER FRAME	
	03	9V50	0 ~ 7	3	MULTI PIP V 50Hz	
	04	9H50	0 ~ 7	2	MULTI PIP H 50Hz	
	05	9V60	0 ~ 7	2	MULTI PIP V 60Hz	
	06	9H60	0 ~ 7	3	MULTI PIP H 60Hz	
	07	SCON	0 ~ 15	8	CONTRAST D/A CONVERTER	

IPQ

	Item number	Adjustment item	Data range	Initial data	Note	Device
IPQ	00	CIN	0 / 1	0	CINE MODE (ABAB RASTER) OFF/ON	83C652
	01	107	0 / 1	1	MEMORY CONFIGURATION TMS4C2972 SWITCH	
	02	LFR	0 / 1	1	LINE FLICKER REDUCTION MODE OFF/ON	
	03	HWE	0 ~ 15	15	HWE 1 LINE DEALY OFF SET TO DEFAULT	
	04	NR	0 ~ 3	2	NOISE REDUCTION LEVEL	
	05	Y-V	0 ~ 255	60	Y-VALUE (BRIGHTNESS)	
	06	UV-V	0 ~ 255	0	UV-VALUE (COLOUR)	
	07	PEAK	0 ~ 127	[illegible]	PEAKING	
	08	CTI	0 ~ 127	64	CTI LEVEL DATA	
	09	VWE	0 ~ 63	31	VWE1 DELAY	

TXT

	Item number	Adjustment item	Data range	Initial data	Note	Device
TXT	00	TXH	0 ~ 255	9	H START POSITION	TPU3040/TPU3041
	01	TXV	0 ~ 63	44	V START POSITION	
	02	VSP	0 ~ 255	59	V STOP POSITION	
	03	BSP	0 ~ 255	61	BLANKING STOP	
	04	BST	0 ~ 255	53	BLANKING START	
	05	QSF	0 ~ 31	1	ACQUSITION SOFT SLICER	
	06	A7F	0 ~ 255	10	VALUE OF ADRESS 007FH	
	07	QDT	0 ~ 63	13	ACQUSITION DATA SLICER	
	08	CST	0 ~ 255	0	CLAMPING START	
	09	CSP	0 ~ 255	80	CLAMPING STOP	
	10	LMT	0 / 1	0	LIMIT SLICER ADAPTION SW	
	11	GMX	0 ~ 255	31	GAIN MAX	
	12	FMX	0 ~ 255	31	FILTER MAX	
	13	TVER	0 ~ 3	3	TPU VERSION (TC2023)	
	14	CSET	0 ~ 7	3	TELETEXT LANGUAGE SETTING 3: WEST (AEP/UK) 5: EAST (K), 6: GREEK	

AP

	Item number	Adjustment item	Data range	Initial data	Note	Device
AP	00	FAW	0 ~ 255	[illegible]	NICAM FAW THRESHOLD	MSP3410
	01	CTM	0 ~ 255	4	NICAM ERROR BIT THRESHOLD(MONO → NICAM)	
	02	CTN	0 ~ 255	80	NICAM ERROR BIT THRESHOLD(NICAM → MONO)	
	03	WGO	0 ~ 255	10	WEST GERMAN STEREO LOW THRESHOLD	
	04	WGS	0 ~ 255	21	WEST GERMAN STEREO HIGH THRESHOLD	
	05	WGT	0 ~ 255	80	WEST GERMAN STEREO LOW 2 THRESHOLD	
	06	WGB	0 ~ 255	250	WEST GERMAN STEREO HIGH 2 THRESHOLD	
	07	ACG	0 / 1	1	AGC AUTO / CONSTANT SWITCH	
	08	CDB	0 ~ 63	30	AGC GAIN VALUE AT CONSTANT MODE	
	09	FMP	0 ~ 127	26	FM MONO PRESCALE	
	10	WGP	0 ~ 127	26	WEST GERMAN STEREO PRESCALE	
	11	INIP	0 ~ 127	127	I NICAM PRESCALE	
	12	BNIP	0 ~ 127	72	B/G NICAM PRESCALE	
	13	LNIP	0 ~ 127	[illegible]	L NICAM PRESCALE	
	14	DNIP	0 ~ 127	72	D/K NICAM PRESCALE	
	15	CRM	0 / 1	0	CARRIER MUTE FUNCTION	
	16	ACO	0 / 1	1	AUDIO CLOCK OUT OFF/ON	
	17	WAC	0 ~ 15	1	WEST GERMAN STEREO JUDGE CONSTANT	

CPU

	Item number	Adjustment item	Data range	Initial data	Note	Device
CPU	00	OSH	0 ~ 63	18	OSD H POSITION	CXP85460
	01	ODL	0 ~ 256	15	POWER ON DELAY	
	02	FTZP	0 / 1	1	FTZ MUTE PRIORITY	
	03	RGBP	0 / 1	0	RGB MODE PRIORITY	
	04	NICP	0 / 1	1	NICAM PRIORITY	
	05	B/G	0 / 1	1	TV SYSTEM B/G OFF/ON	
	06	I	0 / 1	1	TV SYSTEM I OFF/ON	
	07	IRE	0 / 1	0	TV SYSTEM IRE OFF/ON	
	08	D/K	0 / 1	1	TV SYSTEM D/K OFF/ON	
	09	AUS	0 / 1	0	TV SYSTEM AUS OFF/ON	
	10	L	0 / 1	1	TV SYSTEM L OFF/ON	
	11	MYC 2	0 / 1	0	YC2/AV2 PRIORITY	
	12	MYC 4	0 / 1	0	YC4/AV4 PRIORITY	

IP 2

	Item number	Adjustment item	Data range	Initial data	Note	Device
IP2	00	BOX	0 / 1	0	BOX FUNCTION SWITCH	TDA9160
	01	SCF	0 ~ 3	0	SCREEN FADE FUNCTION	
	02	SPS	0 ~ 3	0	SPLIT SCREEN FUNCTION	
	03	PHAS	0 / 1	0	PHASE FLAG	
	04	AXIS	0 / 1	1	RGB AXIS	
	05	HSFT	0 ~ 31	10	H. SHIFT ADJUSTMENT	
	06	SFTE	0 / 1	1	PICTURE SHIFT ENABLE	
	07	SFTF	0 / 1	0	PICTURE SHIFT FACTORY CHECK	
	08	3BCN	0 ~ 255	10	BINARY BIT CHECK FOR TELETEXT	

ADJUSTMENT ITEM AND PROCEDURE	EQUIPMENT AND SIGNAL	MEASUREMENT POSITION	ADJUSTMENT LOCATION	ILLUSTRATION AND SHAPE AND NUMBER
CONVERGENCE ADJUSTMENT ●When replacing the deflection yoke, always perform "DEFLECTION YOKE TILT ADJUSTMENT" before adjusting the convergence. Adjustment procedure  				
• GREEN REGISTRATION ADJUSTMENT			<VSP MENU>	
• V-SHIFT adjustment	Monoscope pattern or Crosshatch pattern		VSP VPOS	VPOS 
• V-LINEARITY adjustment			VSP VLIN	VLIN
• V-SIZE, V-CORRECTION adjustment While tracking, adjust so that the lattice intervals for VSIZ and VSCO are equal.			VSP VSIZ VSP VSCO	VSIZ  VSCO

ADJUSTMENT ITEM AND PROCEDURE	EQUIPMENT AND SIGNAL	MEASUREMENT POSITION	ADJUSTMENT LOCATION	ILLUSTRATION AND SHAPE AND NUMBER
• H-SHIFT adjustment			VSP HPOS	HPOS
• H-SIZE adjustment Finely adjust with SUB MSIZ.			VSP HSIZ	HSIZ
• PIN-AMP adjustment Finely adjust with SUB MPIN.			VSP HPIN	HPIN
• UPPER/LOWER-CORNER PIN adjustment Correct the screens top and bottom bow line. However, if this adjustment is overdone, distortion may occur with the PIN-AMP adjustment that can not be re-adjusted. Note : The PIN-AMP adjusts the overall screen from top to bottom, but the UPPER/LOWER-CORNER PIN adjustments have large movement in the top and bottom sections, so be careful.			VSP UPCP VSP LOCP	UPCP LOCP
• V-ANGLE, V-BOW adjustment Correct the tilt and bow of the vertical line at the center of the screen.			VSP HSKE VSP HBOW	HSKE  HBOW 
• TILT adjustment Adjust to eliminate the tilt of one of the two vertical lines at both ends of the screen.			VSP HKEY	HKEY 

ADJUSTMENT ITEM AND PROCEDURE	EQUIPMENT AND SIGNAL	MEASUREMENT POSITION	ADJUSTMENT LOCATION	ILLUSTRATION AND SHAPE AND NUMBER

CONVERGENCE SUB ADJUSTMENT

Adjustment O : Yes – : No

Display	Adjustment item	Adjustment type					
		RGH	RGV	RRH	RRV	RBH	RBV
BSEL	COL SELECT	–	–	–	–	O	–
CENT	CENT	O	O	O	O	O	O
SKEW	SKEW	O	O	O	O	O	O
BOW	BOW	O	O	O	O	O	O
4BOW	4TH BOW	O	–	O	–	O	–
SIZE	SIZE	O	O	O	O	O	O
LIN	LIN	O	O	O	O	O	O
MSIZ	MID SIZE	O	O	O	O	O	O
MLIN	MID LIN	O	O	O	–	O	–
MKEY	MID KEY	–	O	–	O	–	O
KEY	KEY	O	O	O	O	O	O
SSKW	SUB SKEW	O	O	O	O	O	O
M PIN	MID PIN	O	O	O	O	O	O
PIN	PIN	O	O	O	O	O	O
SBOW	SUB BOW	O	O	O	O	O	O
WAVE	WAVE	–	O	–	O	–	O
MBOW	MID BOW	O	–	O	–	O	–
4PIN	4TH PIN	O	O	O	O	O	O
4SBOW	4TH SUB BOW	O	–	O	–	O	–

ADJUSTMENT ITEM AND PROCEDURE	EQUIPMENT AND SIGNAL	MEASUREMENT POSITION	ADJUSTMENT LOCATION	ILLUSTRATION AND SHAPE AND NUMBER
• GREEN SUB ADJUSTMENT **SCREEN CENTER SECTION GREEN VERTICAL LINE ADJUSTMENT** 1. Finely adjust with RGH CENT, RGH BOW, RGH SKEW. Adjust by watching out for the RGH CENT screen center section.			<RGH MENU> RGH CENT RGH BOW RGH SKEW	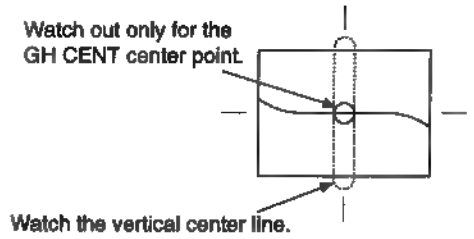 RGH CENT RGH BOW RGH SKEW
2. RGH 4TH BOW adjustment Correct the corner distortion that could not be adjusted away with the RGH 4BOW adjustment.			RGH 4BOW	RGH 4BOW

ADJUSTMENT ITEM AND PROCEDURE	EQUIPMENT AND SIGNAL	MEASUREMENT POSITION	ADJUSTMENT LOCATION	ILLUSTRATION AND SHAPE AND NUMBER
SCREEN CENTER SECTION GREEN HORIZONTAL LINE ADJUSTMENT 1. Finely adjust the center position of the vertical line at the center of the screen with RGV CENT.			<RGV MENU> RGV CENT	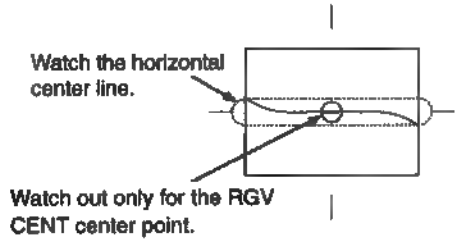 RGV CENT
2. Correct the tilt and bow of the horizontal line at the center of the screen with RGV SKEW and RGV BOW.			RGV SKEW RGV BOW	RGV SKEW RGV BOW
GREEN SIZE AND LINEARITY ADJUSTMENT 1. Balance the sizes at both sides of the center section of the screen with RGH MLIN. 2. Balance the sizes on both end sections of the screen with RGH LIN. 3. While tracking, adjust with RGH MLIN and RGH LIN so that the sizes of the horizontal line at the center of the screen are symmetrical left and right.			<RGH MENU> RGH MLIN RGH LIN	

ADJUSTMENT ITEM AND PROCEDURE	EQUIPMENT AND SIGNAL	MEASUREMENT POSITION	ADJUSTMENT LOCATION	ILLUSTRATION AND SHAPE AND NUMBER
GREEN HORIZONTAL SIZE ADJUSTMENT 1. Adjust with RGH MSIZE so that the sizes of both ends and of both sides of the center section of the screen are equal. 2. Adjust with RGH SIZE so that the horizontal sizes of both ends and of both sides of the center section of the screen are equal. 3. While tracking, adjust with RGH MSIZ and RGH SIZE so that the lattice intervals for the horizontal line section of the center section of the screen are equal and so that the horizontal size is the prescribed value. 4. If M LIN is changed when the RGH MSIZ and RGH SIZE adjustment is complete, adjust again while tracking. ●With just the H SIZE adjustment in MAIN, if there is no need to adjust RGH SIZE in SUB this can save power.			<RGH MENU> RGH MSIZ RGH SIZE	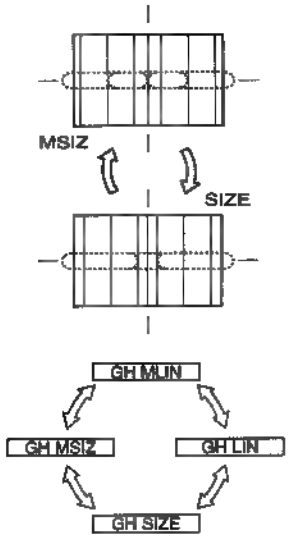
GREEN VERTICAL LINEARITY ADJUSTMENT 1. Adjust RGV LIN so that the vertical lines at the top and bottom of the screen are symmetrical.			<RGV MENU> RGV LIN	

ADJUSTMENT ITEM AND PROCEDURE	EQUIPMENT AND SIGNAL	MEASUREMENT POSITION	ADJUSTMENT LOCATION	ILLUSTRATION AND SHAPE AND NUMBER
GREEN VERTICAL SIZE ADJUSTMENT 1. Adjust with RGV MSIZE so that the sizes for the top and bottom sections of the screen and for both sides of the center section of the screen are equal. 2. Set the vertical size to the prescribed value with RGV SIZE. 3. Adjust RGV MSIZ and RGV SIZE watching the vertical line at the center section of the screen. 4. While tracking, adjust with RGV MSIZ and RGV SIZE so that the lattice intervals for the vertical line section of the center section of the screen are equal and so that the vertical size is the regulation value. 5. If RGV LIN is out of place when the RGV MSIZ and RGV SIZE adjustment is complete, adjust again while tracking. ●If there is no need to adjust RGV SIZE in SUB with just the V SIZE adjustment in MAIN, this can save power.			<RGV MENU> RGV MSIZ RGV SIZE	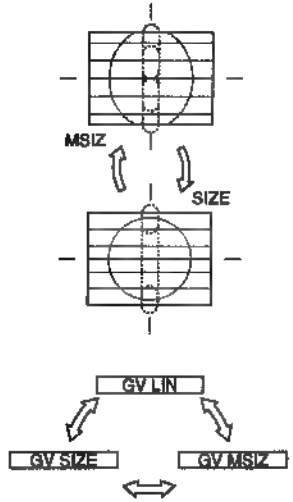
GREEN HORIZONTAL TRAPEZOIDAL DISTORTION ADJUSTMENT 1. Adjust with RGH SSKW so that the tilt of the vertical lines at both ends of the screen is symmetrical left and right. 2. Adjust with RGH KEY so that there is no tilt in the vertical lines at both ends of the screen. 3. If there is a tilt on either the left or right after the RGH KEY adjustment, adjust while tracking.			<RGV MENU> RGH SSKW RGH KEY	

ADJUSTMENT ITEM AND PROCEDURE	EQUIPMENT AND SIGNAL	MEASUREMENT POSITION	ADJUSTMENT LOCATION	ILLUSTRATION AND SHAPE AND NUMBER
GREEN HORIZONTAL QUATERNARY ADJUSTMENT 1. Correct the quaternary distortion with RGH 4PIN. 2. While balancing, correct the quaternary distortion of both end sections of the screen with RGH 4SBOW. 3. While tracking, adjust with RGH 4PIN and RGH 4SBOW.			<RGH MENU> RGH 4PIN RGH 4SBOW	
GREEN HORIZONTAL ASYMMETRICAL PIN DISTORTION ADJUSTMENT 1. Adjust with RGH MBOW so that the pin asymmetry at both sides of the center section of screen is symmetrical. 2. Adjust with RGH SBOW so that the bow at both end sections of the screen is symmetrical left and right. 3. While tracking, adjust with RGH MBOW and RGH SBOW so that the bow of vertical lines on the entire screen is symmetrical left and right.			<RGH MENU> RGH MBOW RGH SBOW	

ADJUSTMENT ITEM AND PROCEDURE	EQUIPMENT AND SIGNAL	MEASUREMENT POSITION	ADJUSTMENT LOCATION	ILLUSTRATION AND SHAPE AND NUMBER
GREEN HORIZONTAL SYMMETRICAL PIN DISTORTION ADJUSTMENT 1. Adjust the pin distortion at both sides of the center section of the screen with RGH MPIN. 2. Adjust the pin distortion at both end sections of the screen with RGH PIN. 3. While tracking, adjust with RGH MPIN and RGH PIN so that the PIN of vertical lines on the entire screen have no bowing. 4. If there is asymmetrical pin distortion after the RGH MPIN and RGH PIN adjustments, adjust with RGH MBOW and RGH SBOW while tracking. ●With just the PIN AMP adjustment in MAIN, if there is no need to adjust RGV PIN in SUB, this can save power.			<RGH MENU> RGH MPIN RGH PIN RGH MBOW RGH SBOW	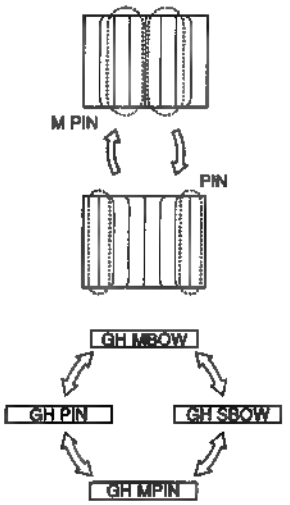
GREEN VERTICAL WAVE (TERTIARY DISTORTION) ADJUSTMENT 1. Take the screen top and bottom horizontal lines with RGV WAVE and find the secondary and quaternary waveform. 2. There is KEY distortion after the RGV WAVE adjustment, so adjust with RGV WAVE and RGV KEY while tracking.			<RGV MENU> RGV WAVE RGV KEY	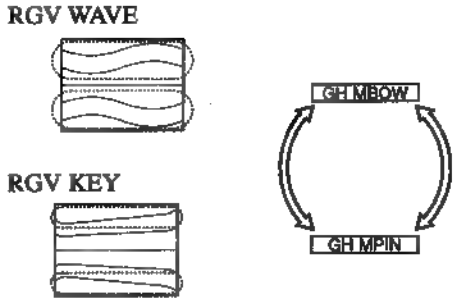

ADJUSTMENT ITEM AND PROCEDURE	EQUIPMENT AND SIGNAL	MEASUREMENT POSITION	ADJUSTMENT LOCATION	ILLUSTRATION AND SHAPE AND NUMBER
GREEN VERTICAL QUATERNARY DISTORTION ADJUSTMENT 1. Correct the quaternary distortion of the horizontal lines at the top and bottom sections of the screen with RGV 4PIN. 1) Since there is no 4SBOW for vertical correction, there will be a slight imbalance, but adjust to eliminate the distortion from the horizontal line at either the top or the bottom of the screen. 2) In many cases, the horizontal lines at the top and bottom sections of the screen are not straight lines after the adjustment. As long as the secondary distortion is mild enough that it can be corrected with the PIN adjustment, this is OK.			<RGV MENU> RGV 4PIN	RGV 4PIN 
GREEN VERTICAL TRAPEZOIDAL DISTORTION ADJUSTMENT 1. Adjust with RGV SSKW so that the tilt of the horizontal lines at the top and bottom sections of the screen is symmetrical about the center position horizontal line. 2. Adjust with RGV MKEY so that there is no tilt for the line sections at both sides of the horizontal lines at the center section of the stream. 3. Adjust with RGV KEY so that there is no tilt for the horizontal lines at the top and bottom sections of the screen. 4. While tracking, adjust with RGV MKEY and RGV KEY so that there is no tilt for the horizontal lines on the entire screen. 5. If the tilt is unbalanced after the RGV MKEY and RGV KEY adjustment, adjust again with RGV SSKW.			<RGV MENU> RGV SSKW RGV MKEY RGV KEY RGV SSKW	RGV SSKW   

ADJUSTMENT ITEM AND PROCEDURE	EQUIPMENT AND SIGNAL	MEASUREMENT POSITION	ADJUSTMENT LOCATION	ILLUSTRATION AND SHAPE AND NUMBER
GREEN VERTICAL ASYMMETRICAL PIN DISTORTION (SECONDARY DISTORTION) ADJUSTMENT 1. Correct the asymmetrical pin distortion at the top and bottom sections of the screen with RGV SBOW.			<RGV MENU> RGV SBOW	RGV SBOW
GREEN VERTICAL ASYMMETRICAL PIN DISTORTION ADJUSTMENT 1. Adjust the pin distortion for both side sections and the center of the screen with RGV MPIN. 2. Adjust with RGV PIN so that the horizontal lines at the top and bottom sections of the screen are straight lines. 3. Adjust with RGV MPIN and RGV PIN so that there is no curve in the horizontal lines on the entire screen.			<RGV MENU> RGV MPIN RGV PIN	
4. After the adjustments in Items 1-3, adjust the tracking with RGV SBOW, RGV MPIN, and RGV PIN.			RGV SBOW	

ADJUSTMENT ITEM AND PROCEDURE	EQUIPMENT AND SIGNAL	MEASUREMENT POSITION	ADJUSTMENT LOCATION	ILLUSTRATION AND SHAPE AND NUMBER
GREEN AND RED REGISTRATION ADJUSTMENT (RRH, RRV) 1. Receive a PAL cross-hatch signal. 2. Adjust so that the red lines lay on the green lines. Adjust with the same procedure as the GREEN SUB adjustment. Notes: 1. The main correction is not carried out during red registration adjustment. 2. Beware. The green adjustment items can be changed by mistake. 3. Unlike for green, adjust within the range -127 ~ +128. **GREEN AND BLUE REGISTRATION ADJUSTMENT (RBH, RBV)** 1. Receive a PAL cross-hatch signal. 2. Adjust so that the blue and green lines are on top of each other. Notes : 1. The main correction is not carried out during RED registration adjustment. 2. Beware. The GREEN and RED adjustment items can be changed by mistake.	PAL Cross-hatch pattern PAL Cross-hatch pattern			

ADJUSTMENT ITEM AND PROCEDURE	EQUIPMENT AND SIGNAL	MEASUREMENT POSITION	ADJUSTMENT LOCATION	ILLUSTRATION AND SHAPE AND NUMBER
AGC ADJUSTMENT 1. Receive an off-air signal. 2.Adjust the AGC VR (IF 1001) so that there is no snow noise and cross-modulation.				
WHITE BALANCE ADJUSTMENT 1. Receive the monoscope pattern signal and adjust the picture quality with the menu. 2. Adjust service mode SBRT so that the signal 10 IRE section barely glows. 3. Receive the all-white pattern signal. 4. Adjust the white balance with service mode GCUT and BCUT. 5. Adjust service mode SBRT so that the signal 100 IRE section barely glows. 6. Adjust the white balance with service mode GAMP and BAMP. 7. Repeatedly adjust the white balance for the minimum and maximum picture settings.	Monoscope pattern All White pattern		PICTURE .....minimum < RGB MENU > RGB SBRT RGB GCUT RGB BCUT PICTURE .....minimum RGB GAMP RGB BAMP PICTURE .....maximum	

SECTION 4
SAFETY RELATED ADJUSTMENTS

ADJUSTMENT ITEM AND PROCEDURE	EQUIPMENT AND SIGNAL	MEASUREMENT POSITION	ADJUSTMENT LOCATION	ILLUSTRATION AND SHAPE AND NUMBER
[E BOARD] **HV HOLD DOWN CIRCUIT OPERATION CHECK AND ADJUSTMENT** When replacing the following components marked with ◪ on the schematic diagram, always check hold-down voltage and if necessary re-adjust. **OPERATION CHECK** 1. Connect a HV static voltmeter to the unconnected plug of the high-voltage block. 2. Connect a 68kΩ variable resistor, set to maximum value, across CN4006. 3. Power on the set. 4. Receive dot signal pattern. 5. Gradually lower the value of the variable resistor and check that the hold-down circuit operates at a static voltmeter reading of 33.40±0.30kVdc when the raster disappears. **HV HOLD-DOWN ADJUSTMENT** 1. REPART STEPS ① ~ ⑤ as above. 2. Just at the point hold-down circuit begins to operate switch off the set. 3. Remove the VR connected across CN4006, and measure it's resistance. 4. Solder a resistor value, nearest to the measured value, across CN4007. 5. Reconfirm operation check.	HIGH-VOLTAGE Voltmeter Dot pattern	◪ marked parts C4057, D4026, R988, R4019, T4002, T4003 (FBT), E BOARD, HV Block HV Block CN4006 HIGH-VOLTAGE Voltmeter 33.40 ± 0.30kVdc	◪ R988	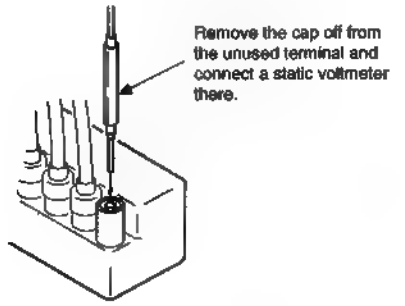 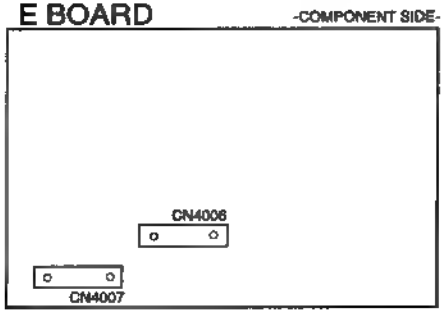 

ADJUSTMENT ITEM AND PROCEDURE	EQUIPMENT AND SIGNAL	MEASUREMENT POSITION	ADJUSTMENT LOCATION	ILLUSTRATION AND SHAPE AND NUMBER
HV REGULATION CIRCUIT CHECK AND ADJUSTMENT When replacing the following components marked with ◪ on the schematic diagram always check HV regulation, and if necessary re-adjust. **OPERATION CHECK** 1. Connect a HV static voltmeter to the unconnected plug of the high-voltage block. 2. Power on the set. 3. Receive dot signal pattern. 4. Check that the HV static voltmeter is reading 31.00±0.2kVdc. **HV Regulation adjustment** 1. Repeat step ① as aboue. 2. Connect 68kΩ variable resistor, set to maximum value, to CN4006. 3. Power on the set. 4. Receive dot signal pattern. 5. Gradually lower the value of the variable resistor until the static voltmeter is reading 31.00±0.20kVdc. 6. Switch off the set. 7. Remove the VR connected across CN4006, and measure its value. 8. Solder a resistor value, nearest to the measured value, across CN4006. 9. Reconfirm operation check.	Dot pattern HIGH-VOLTAGE Voltmeter	◪ marked parts C4033, C4034, C4046, C4047, C4049, D4012, D4018, D4023, D4028, D4035, R983, R4022, R4046, R4047, R4048, R4053, R4054, R4057, R4059, R4060, R4061, R4077, R4079, R4086, R4087, R4088, R4091, R4092, R4097, R4098, R4100, Q4013, T4002, T4003 (FBT), ◧ Board, HV Block HIGH-VOLTAGE Voltmeter 31.00 ± 0.20k Vdc CN4006	■ R983	E BOARD -COMPONENT SIDE- 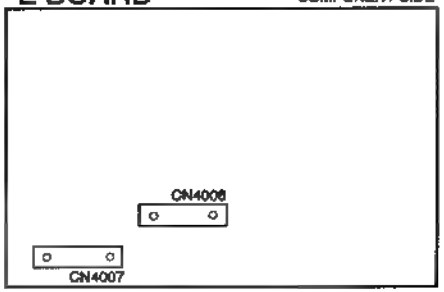 

ADJUSTMENT ITEM AND PROCEDURE	EQUIPMENT AND SIGNAL	MEASUREMENT POSITION	ADJUSTMENT LOCATION	ILLUSTRATION AND SHAPE AND NUMBER
HV HOLD DOWN ADJUSTMENT WITHOUT USING STATIC HIGH VOLTAGE METER It is normally desirable that HV hold down and HV regulation checks uses a high voltage meter. However, sometimes one is not available, for example in the held, below is an adjustment method that can be used. 1. Receive DOT signal (PICTURE : 80%, BRIGHTNESS : 50%). 2. Turn off the power of the projector, and remove ⋈R983 from CN4006 and ⋈R988 from CN4007. 3. Fix a 47kΩ VR onto CN4006 with solder, and set the resistor value at maximum. Fix a 68kΩ VR onto CN4007 with solder, and set the resistor value at minimum. 4. Turn on the power of the projector. Connect a digital voltmeter to IC4001 ⑤ pin. 5. Slowly turn the 47kΩ VR that is soldered to CN4006, and gradually lower the voltage of IC4001 ⑤ pin down to 1.67Vdc. 6. Slowly turn the 68kΩ VR that is soldered to CN4007, and gradually raise the resistor value until the raster disappears and the HV hold down circuit starts operating. 7. Turn off the power of the projector. 8. Remove the 68kΩ VR from CN4007, and measure the resistor value with the digital voltmeter. Put a resistor (metal oxide, 1/4W) that has same value as the measured resistor onto CN4007 and solder it. 9. Set the value of the 47kΩ VR on CN4006 at the maximum. Receive DOT signal (PICTURE : 80%, BRIGHTNESS : 50%). 10. Turn on the power of the projector. 11. Connect a digital voltmeter to IC 4001 ⑤ pin. 12. Slowly turn down the 47kΩ VR that is connected to CN4006 to gradually lower the voltage of IC4001 ⑤ pin between 1.62 to 1.70Vdc, and check if the raster disappears and the hold down circuit operates. 13. Turn off the power of the projector. 14. Remove the 47kΩ VR from CN4006. Put back the removed ⋈ R983 onto CN4006 and solder it again.	Dot pattern Digital voltmeter	IC4001 ⑤ pin	⋈ R983, R988 47kΩ VR ..... maximum 68kΩ VR ..... minimum PICTURE .....80% BRIGHTNESS .....CENTER	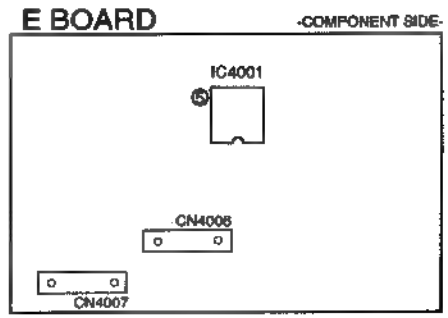 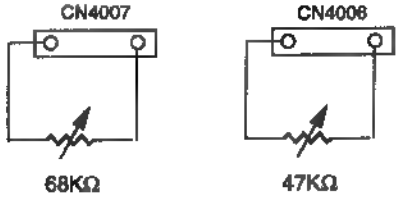

ADJUSTMENT ITEM AND PROCEDURE	EQUIPMENT AND SIGNAL	MEASUREMENT POSITION	ADJUSTMENT LOCATION	ILLUSTRATION AND SHAPE AND NUMBER
HV REGULATOR ADJUSTMENT WITHOUT USING STATIC HIGH VOLTAGEMETER (⊠R983) 1. Receive DOT signal (PICTURE : 80%, BRIGHTNESS : 50%). 2. Turn off the power of the projector. 3. Remove ⊠R983 from CN4006. 4. Fix a 47kΩ VR onto CN4006 with solder, and set the resistor value at maximum. 5. Turn on the power of the projector. Connect a digital voltmeter to IC4001 ⑤ pin. 6. Slowly turn the 47kΩ VR that is soldered to CN4006, and gradually lower the voltage of IC4001 ⑤ pin down to 1.49Vdc. 7. Turn off the power of the projector. 8. Remove the 47kΩ VR from CN4006, and measure the resistor value with the digital voltmeter. Put a resistor (metal oxide, 1/4W) that has same value as the measured resistor onto CN4006 and solder it. 9. Turn on the power of the projector. Check if the voltage of IC4001 ⑤ pin is between 1.46 and 1.53Vdc. 10. Receive FULL WHITE signal (PICTURE : 80%, BRIGHTNESS : 50%). 11. Turn off the power of the projector.	Dot signal Digital voltmeter Full white pattern	IC4001 ⑤ pin	⊠ R983 PICTURE .....80% BRIGHTNESS .....center PICTURE .....80% BRIGHTNESS .....center	E BOARD -COMPONENT SIDE- 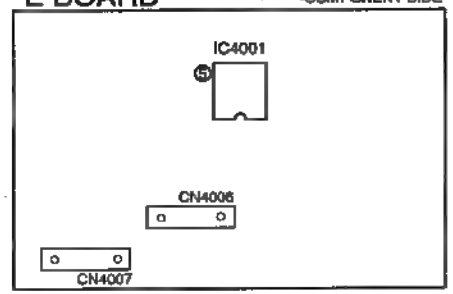 
[G BOARD] **+B MAX VOLTAGE CONFIRMATION** The following adjustments should always be performed when replacing IC6002 and R6054. 1. Supply 230VAC ⊞ with variable autotransformer. 2. Input monoscope signal. 3. Set the PICTURE control and the BRIGHTNESS controls to reset. 4. Confirm the voltage of G BOARD CN6014 ① pin connecter is less than 134.50 ± 1.00Vdc. 5. If step 4 is not satisfied, replace IC6002 and R6054 repeat above steps.		CN6014 ① pin		G BOARD – COMPONENT SIDE – 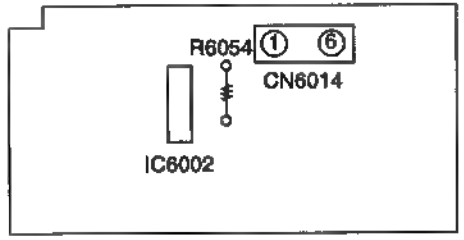 Voltage of CN6014 ① pin Less than 134.50 ±1.00Vdc

SECTION 5
ELECTRICAL ADJUSTMENTS

ADJUSTMENT ITEM AND PROCEDURE	EQUIPMENT AND SIGNAL	MEASUREMENT POSITION	ADJUSTMENT LOCATION	ILLUSTRATION AND SHAPE AND NUMBER
B BOARD ADJUSTMENT **SUB COLOUR (SCOL) ADJUSTMENT** 1. Input the PAL Colour Bar signal and adjustment the picture control. 2. Set to service mode. 3. Connect an oscilloscope between ㉔ pin of IC409 and ground. 4. Adjust SCOL so that Vcy = VMg = VBi in the waveform levels. 5. Write the data to memory.	PAL Colour Bar pattern Oscilloscope	IC409 ㉔ pin (B(3/4) Board)	PICTURE .... 80% RGB SCOL : Vcy =VMg=VBi	<IC409 ㉔ pin> 
SUB HUE (MHUE,SHUE) ADJUSTMENT 1. Input the NTSC Colour Bar signal. 2. Set to service mode. 3. Connect an oscilloscope between ㉔ pin of IC409 and ground. 4. Adjust MHUE so that Vcy = VMg in the waveform levels. 5. Write the data to memory.	NTSC Colour Bar pattern Oscilloscope	IC409 ㉔ pin (B(3/4) Board)	MCD MHUE : Vcy =VMg	<IC409 ㉔ pin> 
(PIP MODE) 1. Input the NTSC Colour Bar signal. 2. Select PIP on screen mode and put the set into service mode. 3. Connect an oscilloscope between ㉔ pin of IC409 and ground. 4. Adjust SHUE so that Vcy = VMg in the waveform levels. 5. Write the data to memory.	NTSC Colour Bar pattern Oscilloscope	IC409 ㉔ pin (B(3/4) Board)	SCD SHUE : Vcy =VMg	(PIP MODE) < IC409 ㉔ pin > 
SUB CONTRAST (SCON) ADJUSTMENT (PIP MODE) 1. Input the PAL Colour Bar signal. 2. Select PIP on screen mode and put the set into service mode. 3. Connect an oscilloscope Q1 emitter on the B(1/4) board and ground. 4. Adjust SCON so that V MAIN-Y = V PIP-Y in the waveform levels. 5. Write the data to memory.	PAL Colour Bar pattern Oscilloscope	Q1 emitter (B(1/4) Board)	PIP SCON: V MAIN-Y =V PIP-Y	(PIP MODE) < B(1/4) board - Q1 emitter > 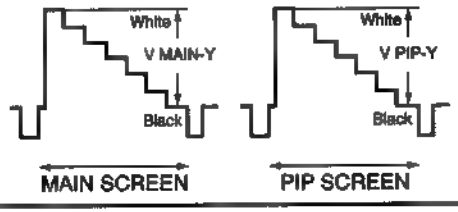

ADJUSTMENT ITEM AND PROCEDURE	EQUIPMENT AND SIGNAL	MEASUREMENT POSITION	ADJUSTMENT LOCATION	ILLUSTRATION AND SHAPE AND NUMBER
SUB WHITE BALANCE ADJUSTMENT (PIP MODE) 1. Input Gray Scale signal 20 IRE. 2. Select PIP in screen mode and put the set into service mode. 3. Connect an oscilloscope Q2 emitter on the B(1/4) board and ground. 4. Adjust RV1 so that V main = Vpip in the waveform levels. 5. Connect an oscilloscope Q7 emitter on the B(1/4) board and ground. 6. Adjust RV2 so that V main = Vpip in the waveform levels.	Oscilloscope	[B(1/4) Board] Q2 emitter (R-Y) Q7 emitter (B-Y)	[B(1/4) Board] RV1 (R-Y) RV2 (B-Y)	< Q2 emitter, Q7 emitter > 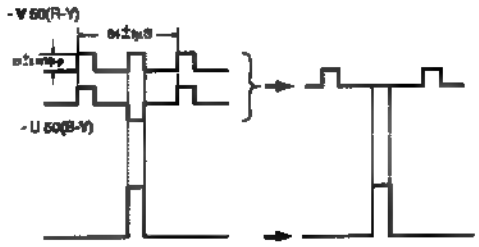
P IN P POSITION ADJUSTMENT 1. Upon receiving the Monoscope signal. 2. Set service mode and then press the PIP command twice. The P in P positon will then move periodically to four points. Adjust " RDV " and " RDH " on the new screen so that the four points are distributed equally at ; up, down, left and right. 3. Write the data to memory.	Monoscope pattern		< PIP MENU > RDV RDH	
TEXT POSITION ADJUSTMENT 1. Receive the RF signal with TEXT. 2. Set to service mode. 3. Set the TEXT in MIX mode and adjust the screen positon with " TXH " and " TXV ". 4. Write the data to memory.			< TXT MENU > TXH (H position) TXV (V position)	
OSD POSITION ADJUSTMENT 1. Receive the PAL Colour Bar signal. 2. Set to service mode. 3. Adjust " OSH " so that the center line of the signal and the center of the crosshairs of the OSD display match are aligned with each other. 4. Write the data to memory.	PAL Colour Bar pattern		< CPU MENU > OSH	

ADJUSTMENT ITEM AND PROCEDURE	EQUIPMENT AND SIGNAL	MEASUREMENT POSITION	ADJUSTMENT LOCATION	ILLUSTRATION AND SHAPE AND NUMBER
B2 BOARD ADJUSTMENT **SECAM FILTER ADJUSTMENT** 1. Receive the SECAM Colour Bar signal. 2. Adjust BELL filter by rotating L3503 so that ⑲ pin IC3502 should be flat/smooth chroma signal. 3. Adjust B-Y filter by rotating L3505 so that Q3508 emitter (R-Y out) should getsymmetrical transient between (R-Y)>(B-Y) and (B-Y)>(R-Y).	SECAM Colour Bar pattern	IC3502 ⑲ pin Q3508 emitter	L3503 L3505	< IC3502 ⑲ pin waveform > BAD GOOD BAD < Q3508 emitter waveform > BAD GOOD BAD
H. FREQUENCY ADJUSTMENT 1. Connect a frequency counter to ⑫ pin of IC3501. 2. Adjust RV3501 so that the frequency counter is 15.625KHz ± 50Hz. 3. Input a SECAM Colour Bar signal/p. 4. Confirm that ⑫ pin of IC3501 should be 15.625KHz ± 50Hz.	SECAM Colour Bar pattern	RV3501	IC3501 ⑫ pin	

ADJUSTMENT ITEM AND PROCEDURE	EQUIPMENT AND SIGNAL	MEASUREMENT POSITION	ADJUSTMENT LOCATION	ILLUSTRATION AND SHAPE AND NUMBER
A BOARD ADJUSTMENT				
V BLANKING SIZE ADJUSTMENT 1. Receive PAL monoscope signal. 2. Select "BKU" in D/A menu. 3. Reduce the data value by pressing [3] and [6] on the commander to adjust blanking size and minimize the shear on the screen top. 4. Select "BKD" in D/A menu. 5. Increase the data value by pressing [3] and [6] on the commander to adjust blanking size and minimize the shear on the screen bottom.	PAL Monoscoope pattern			
H SIZE ADJUSTMENT 1. Receive a PAL monoscope signal. 2. Set to Service Mode. 3. Select H SIZE of VSP menu with the commander buttons [1] and [4]. 4. Adjust to 15.4 ± 0.2 square with [3] and [6].	PAL Monoscoope pattern			
S CORRECTION ADJUSTMENT 1. Receive a PAL monoscope signal. 2. Set to Service Mode. 3. Select VSCO of VSP menu with the commander buttons [1] and [4]. 4. Adjust to data "00" with [3] and [6].	PAL Monoscoope pattern			
V SIZE ADJUSTMENT 1. Receive a PAL monoscope signal. 2. Set to Service Mode. 3. Select V SIZE of VSP menu with the commander buttons [1] and [4]. 4. Adjust to 11.6 ± 0.2 square with [3] and [6].	PAL Monoscoope pattern			

SECTION 6
DIAGRAMS

6-1. BLOCK DIAGRAM (1)

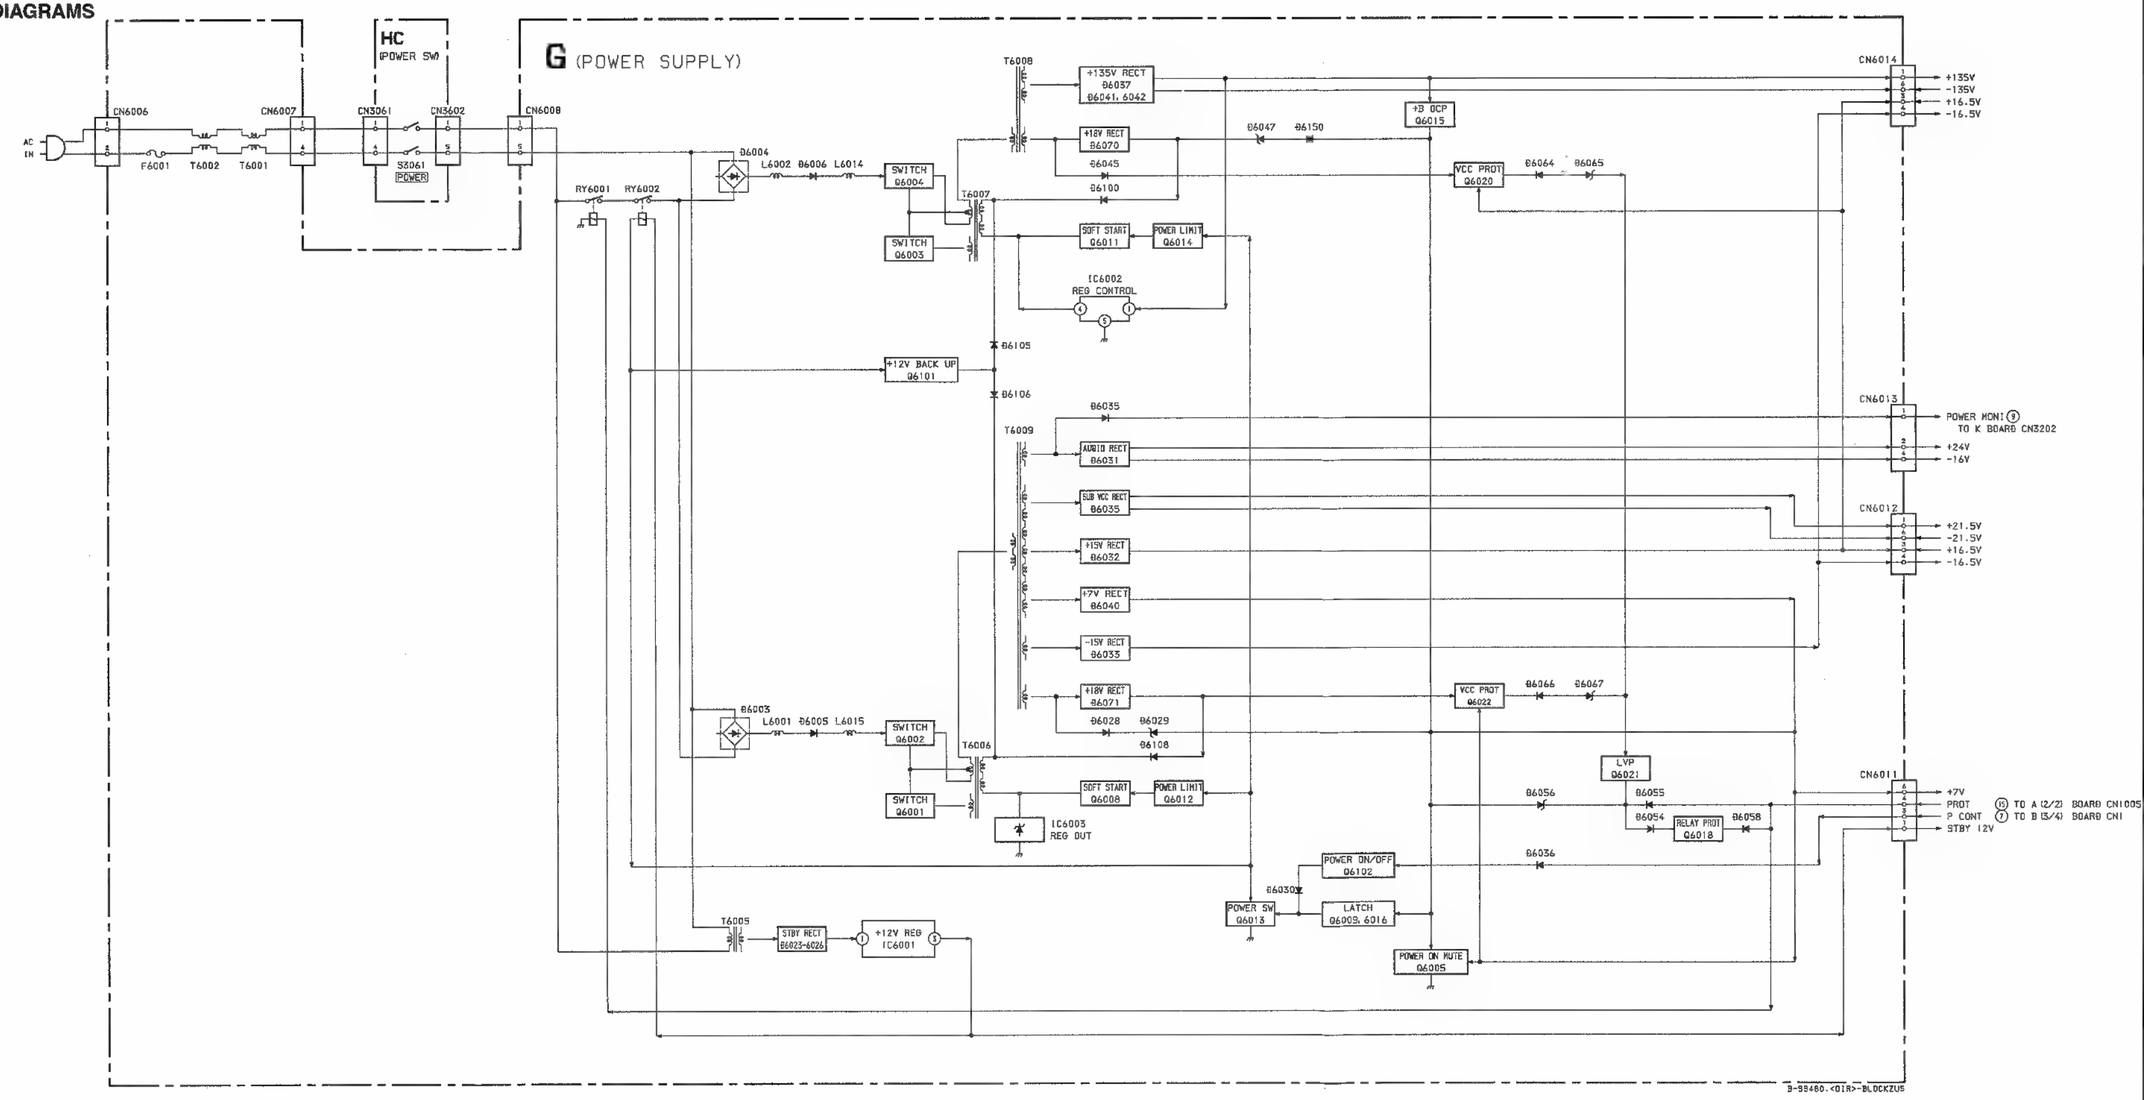

BLOCK DIAGRAM (2)

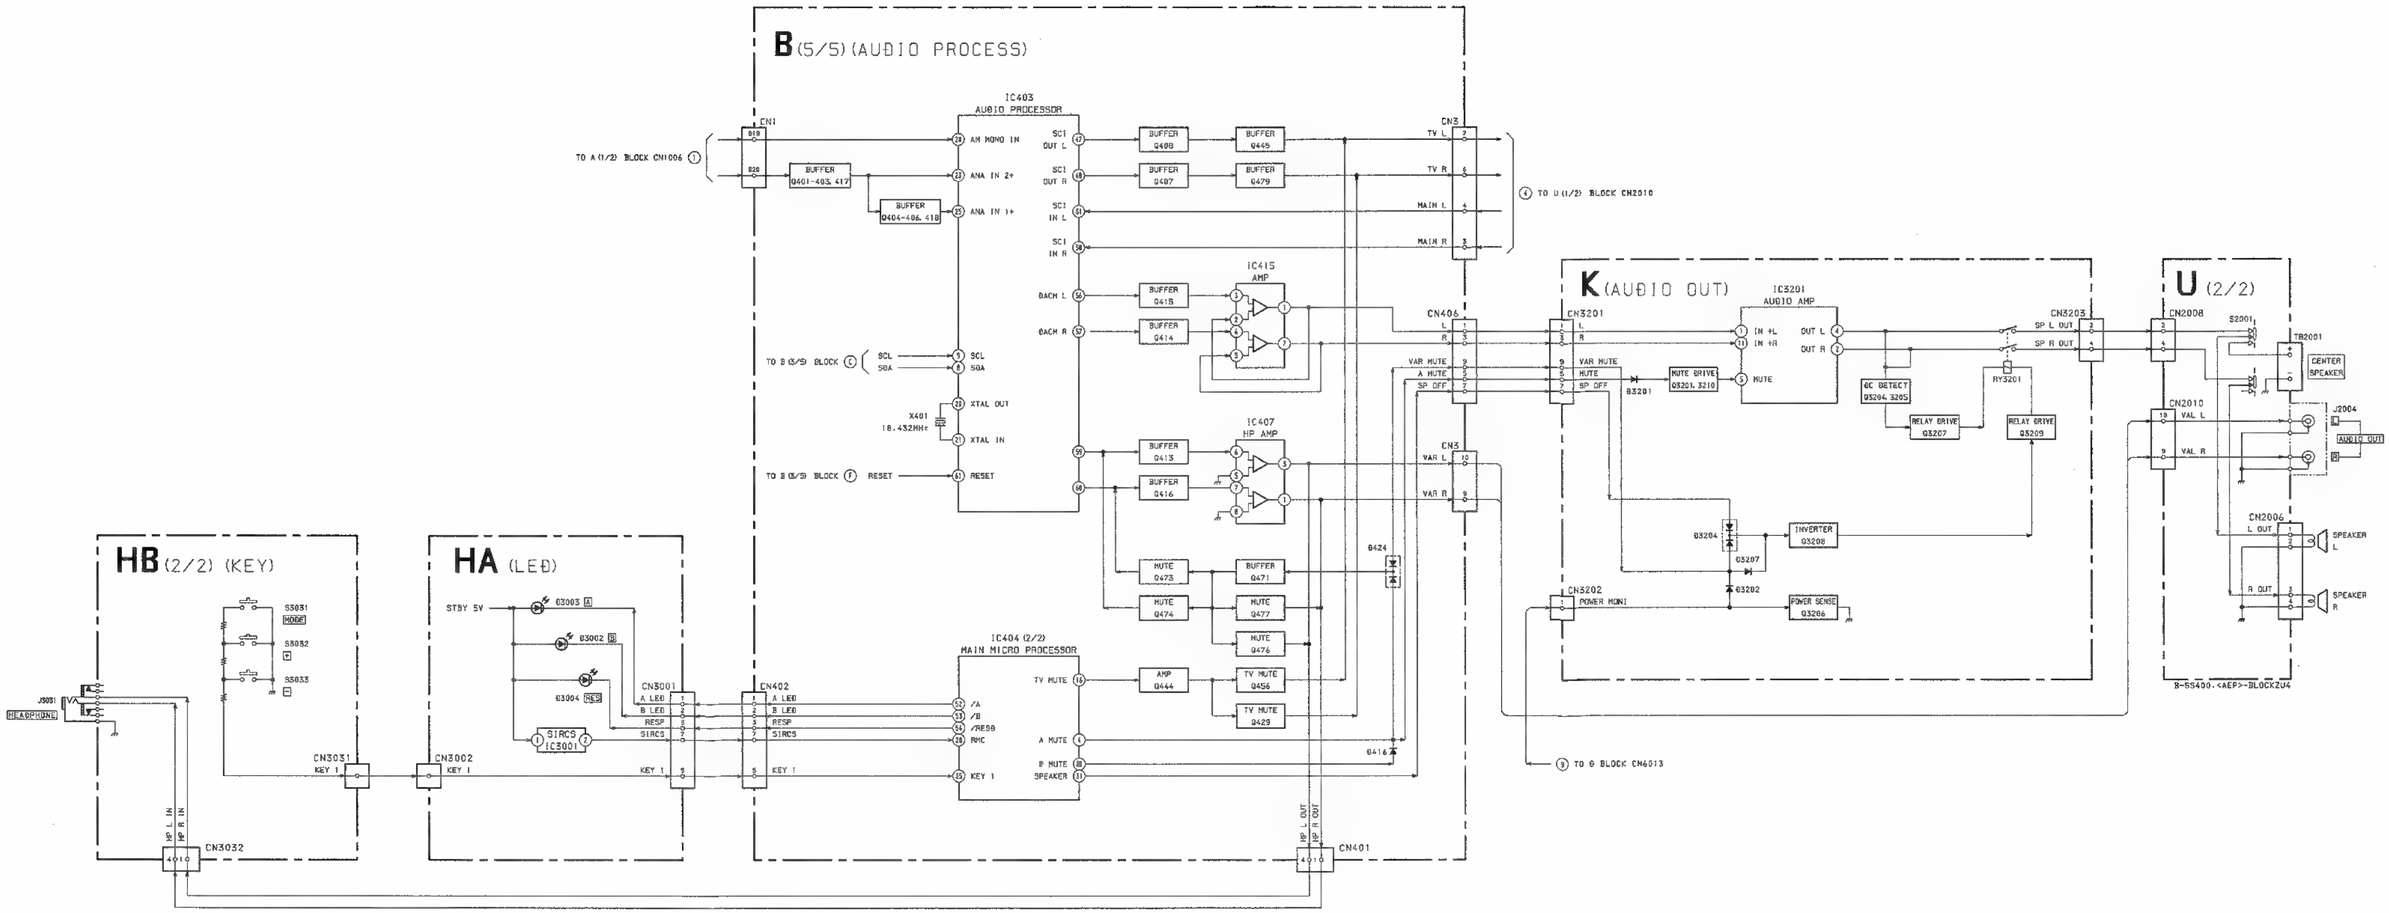

BLOCK DIAGRAM (3)

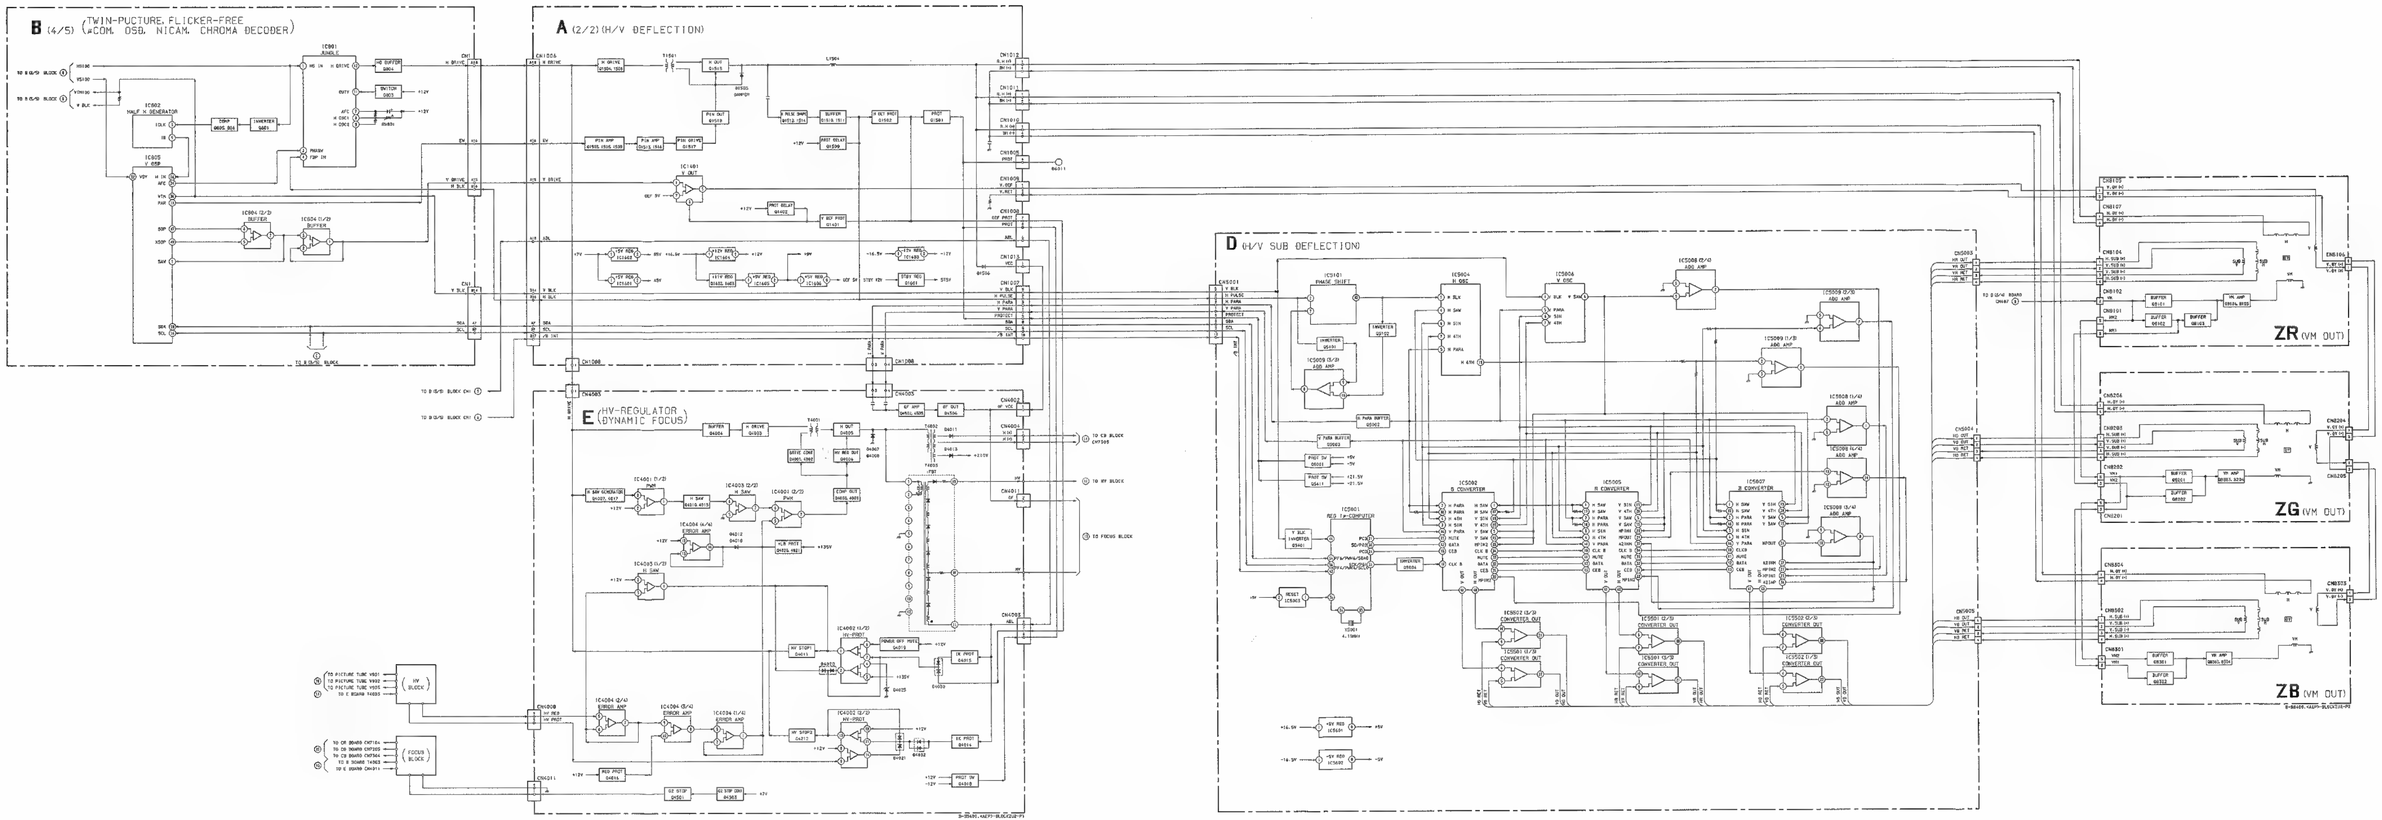

BLOCK DIAGRAM (4)

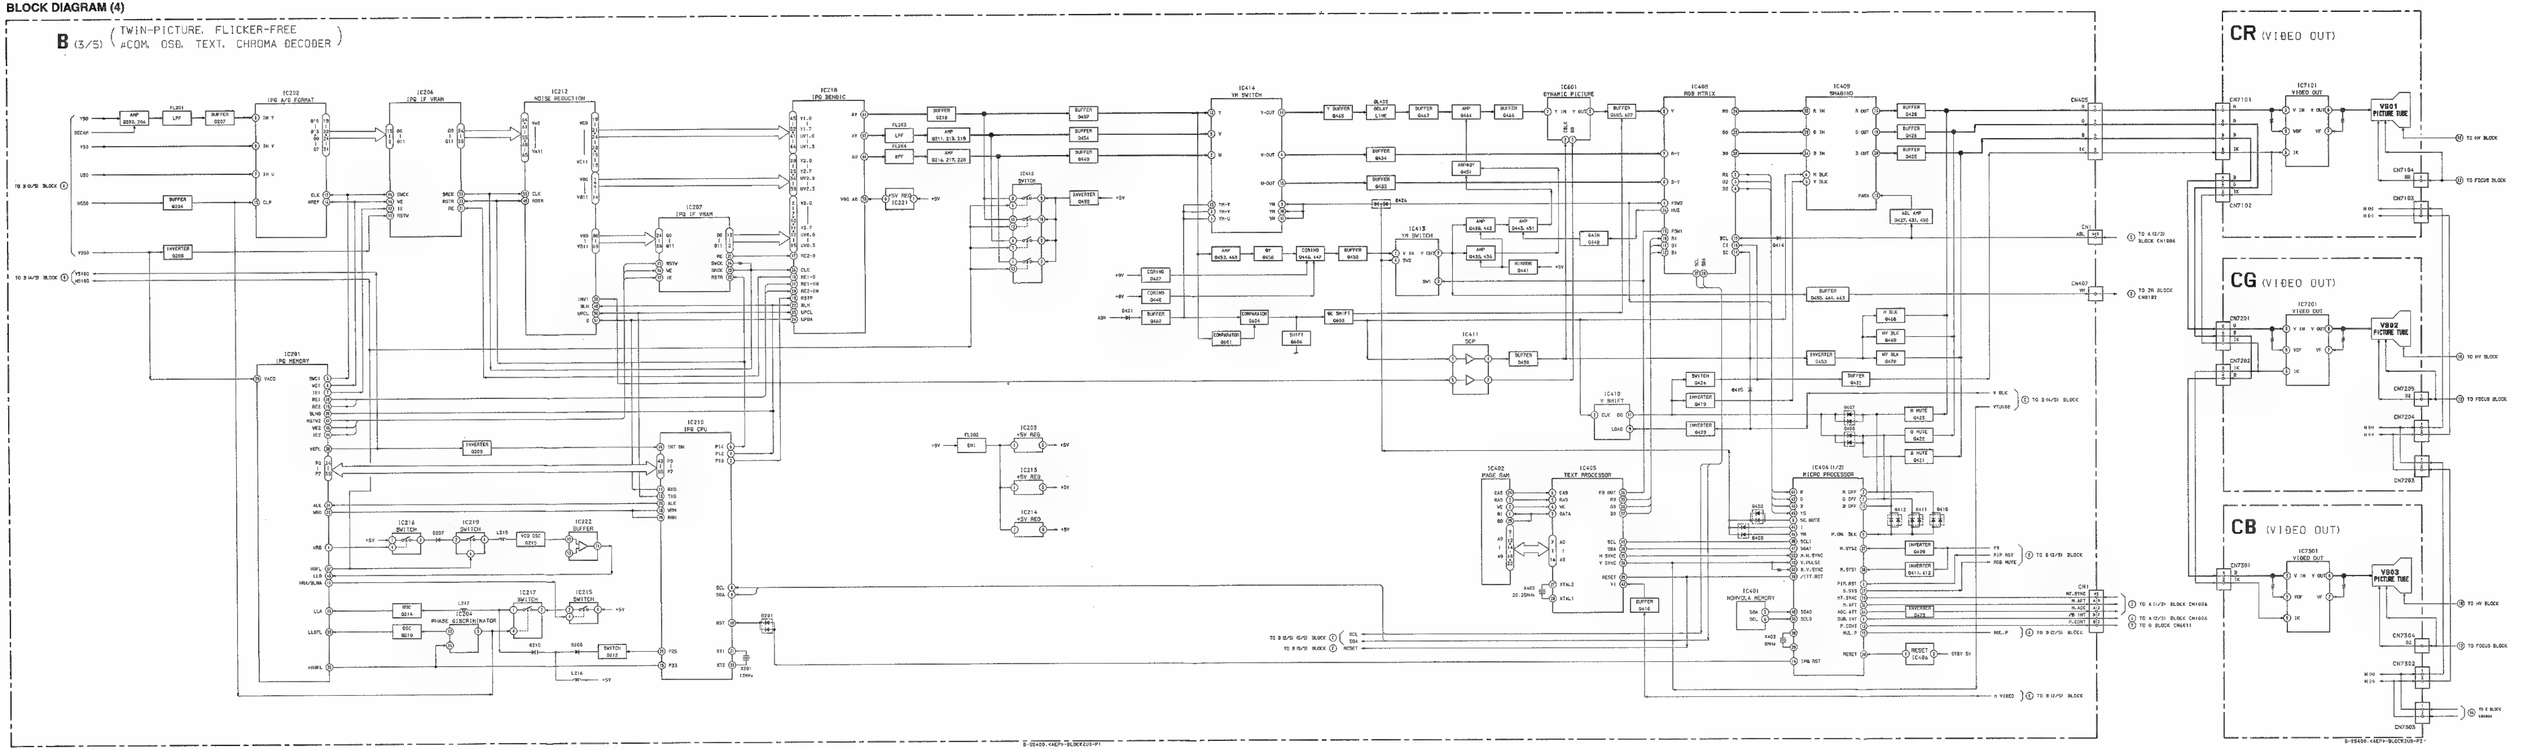

BLOCK DIAGRAM (5)

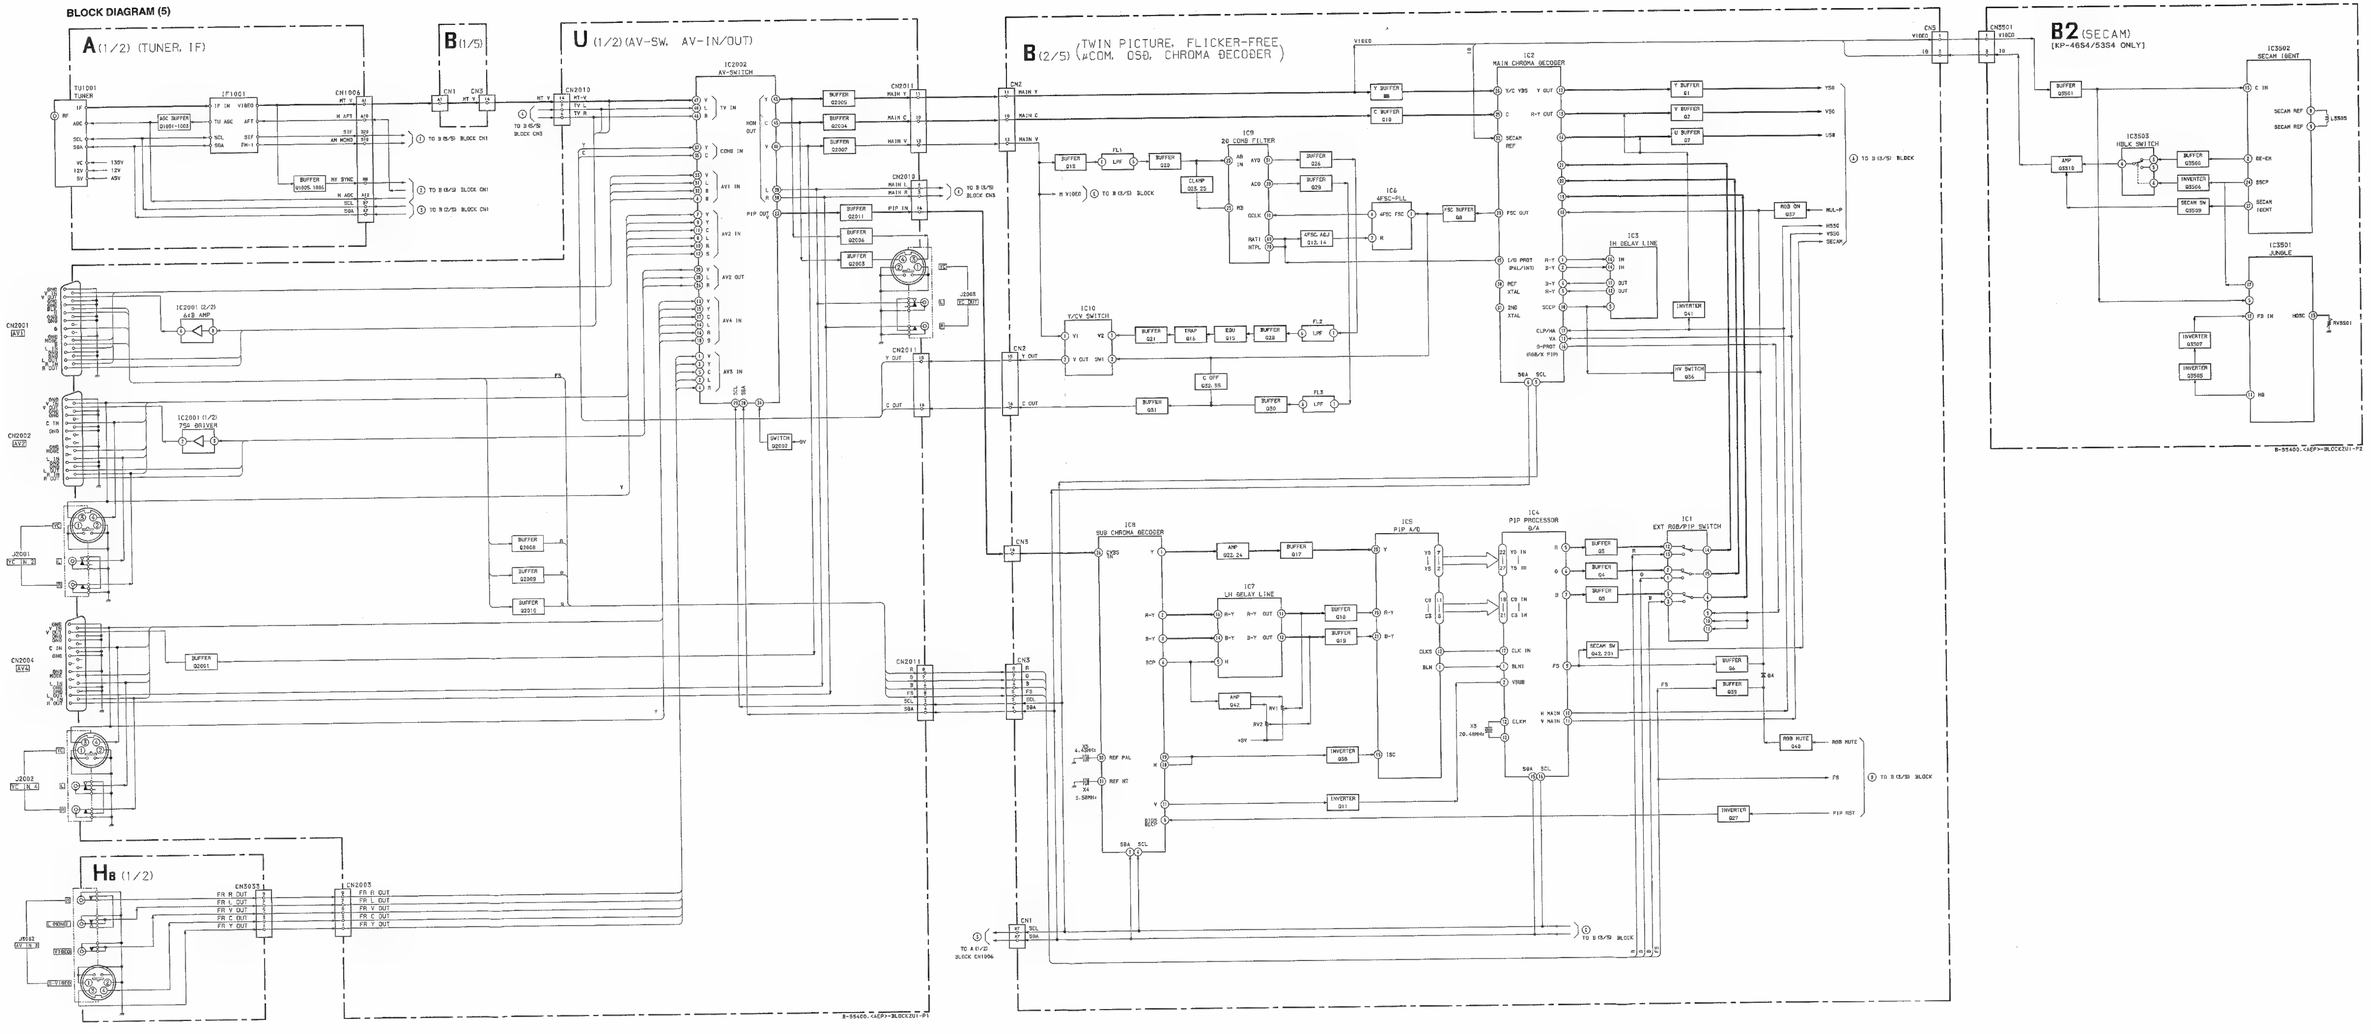

6-2. FRAME SCHEMATIC DIAGRAM

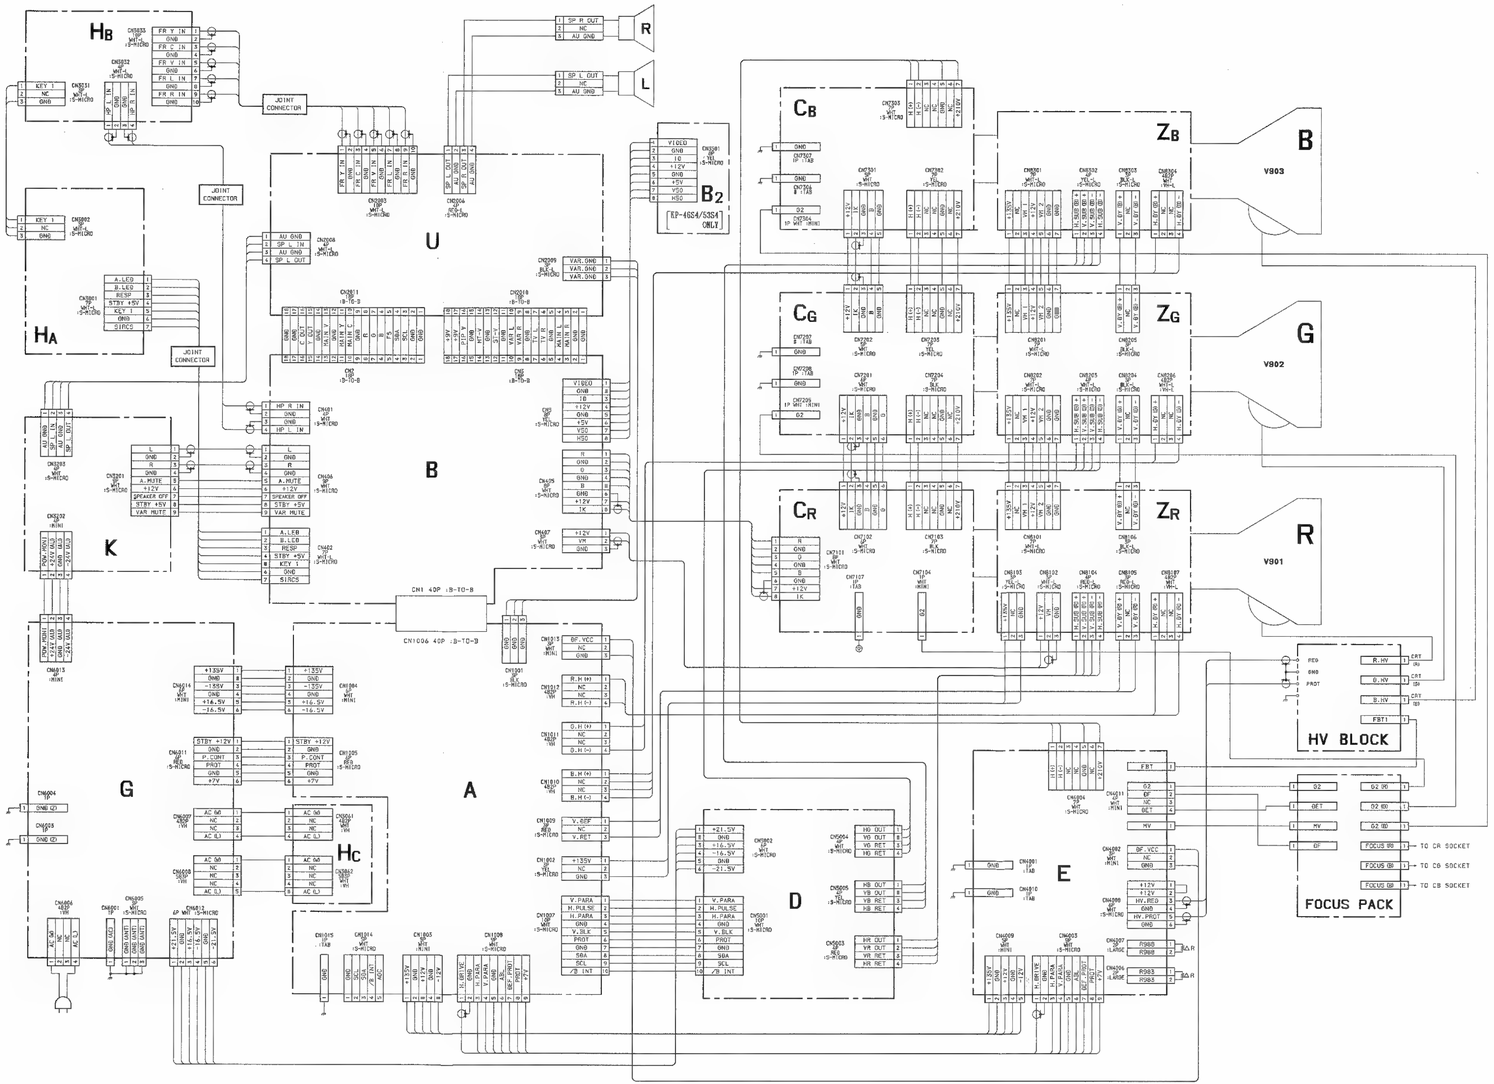

6-3. CIRCUIT BOARDS LOCATION



6-4. PRINTED WIRING BOARDS AND SCHEMATIC DIAGRAMS

Note:
- Capacitors without voltage indication are all 50V
  All capacitors are in μF unless otherwise noted.
- All resistors are in ohms.
  kΩ=1000Ω, MΩ=1000kΩ
- Indication of resistance, which dose not have one for rating electrical power, is as follows.

  Pitch : 5mm
  Rating electrical power : 1/4W

- 1/4W in resistance, 1/6W and 1/4W is chip resistance.
- : nonflammable resistor.
- : fusible resistor.
- : internal component.
- All variable and adjustable resistors have characteristic curve B, unless otherwise noted.
- : earth-chassis.
- The components identified by in this basic schematic diagram have been carefully factory-selected for each set in order to satisfy regulations regarding X-ray radiation.
  Should replacement be required, replace only with the value originally used.
- When replacing components identified by , make the necessary adjustments indicated. If results do not meet the specified value, change the component identified by and repeat the adjustment until the specified value is achieved.
  (Refer to R988, R983 adjustment on Page 40-43.)

Part replaced ( )	Adjustment ( )
C4057, D4026, R988, R4019, T4002, T4003 (FBT), E BOARD, HV BLOCK	HOLD-DOWN (R988)
C4033, C4034, C4046, C4047,C4049, D4012, D4018, D4023, D4028, D4035,R983, R4022, R4046, R4047, R4048, R4053, R4054, R4057, R4059, R4060, R4061, R4077, R4079, R4086, R4087, R4088, R4091, R4092, R4097, R4098, R4100, Q4013, T4002, T4003 (FBT), E Board , HV Block	HOLD-DOWN (R983)

- When replacing the part in below table, be sure to perform the related adjustment.
- Readings are taken with a color-bar signal input.
  no mark : PAL
  ( ) : SECAM
  ( ) : NTSC 3.58
- Readings are taken with a 10MΩ digital multimeter.
- Voltages are dc with respect to ground unless otherwise noted.
- Voltage variations may be noted due to normal production tolerances.
- All voltages are in V.
  * : Measurement impossibility.
- : B+line.
- : B-line.
  (Actual measured value may be different).
- : signal path.
- Circled numbers are waveform references.

Reference information

RESISTOR	: RN	METAL FILM
	: RC	SOLID
	: FPRD	NONFLAMMABLE CARBON
	: FUSE	NONFLAMMABLE FUSIBLE
	: RW	NONFLAMMABLE WIREWOUND
	: RS	NONFLAMMABLE METAL OXIDE
	: RB	NONFLAMMABLE CEMENT
	: ※	ADJUSTMENT RESISTOR
COIL	: LF-BL	MICRO INDUCTOR
CAPACITOR	: TA	TANTALUM
	: PS	STYROL
	: PP	POLYPROPYLENE
	: PT	MYLAR
	: MPS	METALIZED POLYESTER
	: MPP	METALIZED POLYPROPYLENE
	: ALB	BIPOLAR
	: ALT	HIGH TEMPERATURE
	: ALR	HIGH RIPPLE

Note: The components identified by shading and mark ⚠ are critical for safety. Replace only with part number specified.

Note: The symbol display is on the component side.

The components identified by shading and mark ⚠ are critical for safety. Replace only with part number specified.

The symbol indicate fast operating fuse. Replace only with fuse of same rating as maked.

Terminal name of semiconductors in silk screen printed circuit (*)

	Device	Printed symbol	Terminal name	Circuit
①	Transistor	T	Collector / Base / Emitter	
②	Transistor	—	Collector / Base / Emitter	
③	Diode		Cathode / Anode	
④	Diode	T	Cathode / Anode (NC)	
⑤	Diode	—	Cathode / Anode (NC)	
⑥	Diode	T	Common Anode / Cathode	
⑦	Diode	—	Common Anode / Cathode	
⑧	Diode	T	Common Anode / Anode	
⑨	Diode	—	Common Anode / Anode	
⑩	Diode	T	Common Cathode / Cathode	
⑪	Diode	—	Common Cathode / Cathode	
⑫	Transistor (FET)		Drain / Source / Gate	
⑬	Transistor (FET)		Drain / Source / Gate	
⑭	Transistor (FET)		G Source / G Drain / Gate	
–	Discrete semiconductor			

(Chip semiconductors that are not actually used are included.)

Ver.1.1

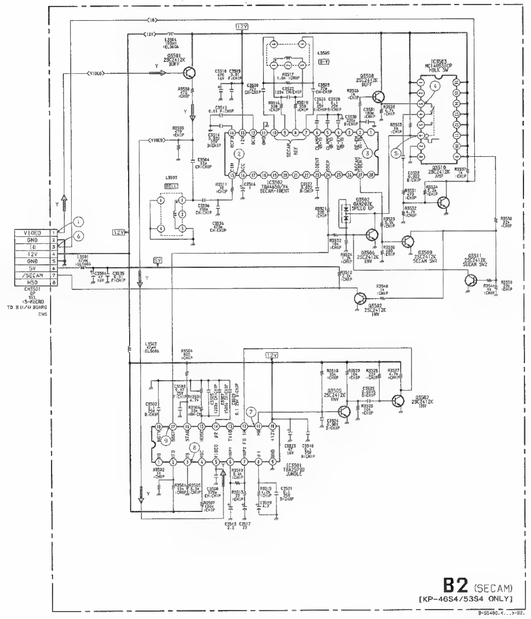

B2 (SECAM)
(KP-46S4/53S4 ONLY)

B-5540K-<...>-02.

B2 BOARD IC VOLTAGE LIST

	Pin	Voltage
IC3501	1	–
	2	<1.1>
	3	<0.3>
	4	<1.1>
	5	<2.2>
	6	<7.6>
	7	<8.6>
	8	<2.8>
	9	GND
	10	<11.6>
	11	<0.3>
	12	<1.2>
	13	–
	14	<2.5>
	15	<4.4>
	16	<2.1>
	17	<1.6>
	18	<8.2>
IC3502	1	–
	2	<7.0>
	3	–
	4	<7.5>
	5	<9.7>
	6	<9.9>
	7	<5.4>
	8	<2.9>
	9	<2.9>
	10	<5.4>
	11	GND
	12	<2.4>
	13	<11.6>
	14	<5.8>
	15	<5.4>
	16	<7.9>
	17	–
	18	–
	19	–
	20	–
	21	–
	22	–
	23	<7.5>
	24	<1.5>
	25	–
	26	–
	27	<5.7>
	28	–
IC3503	1	<11.6>
	2	<11.6>
	3	<5.4>
	4	<6.4>
	5	<10.8>
	6	GND
	7	GND
	8	<11.6>
	9	<11.6>
	10	<11.6>
	11	<11.6>
	12	<11.6>
	13	<11.6>
	14	<11.6>
	15	<11.6>
	16	<11.6>

All voltages are in V.
–: Blank Pin

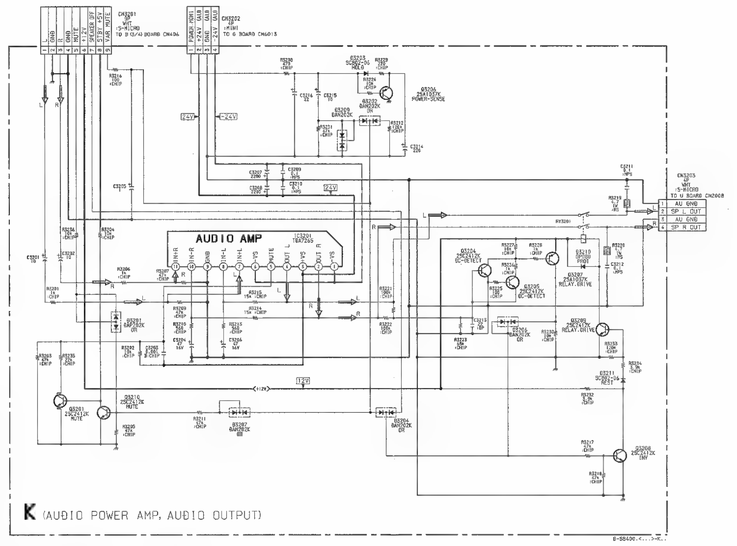

K (AUDIO POWER AMP, AUDIO OUTPUT)

B-5540K-<...>-<...>.

K BOARD TRANSISTOR VOLTAGE LIST

	B	C	E
Q3201	0.3	0.1	GND
Q3204	0	12.4	GND
Q3205	GND	12.3	0
Q3206	12.3	0	12.3
Q3207	12.3	0	12.8
Q3208	6.2	6.6	GND
Q3209	6.7	0.1	GND
Q3210	0	0.8	GND

All voltages are in V.

K BOARD IC VOLTAGE LIST

	Pin	Voltage
IC3201	1	-24.0
	2	0
	3	24.0
	4	0
	5	13.8
	6	-24.0
	7	0
	8	0
	9	GND
	10	0
	11	0

All voltages are in V.

K BOARD : IC3201 TDA7265



B2 BOARD TRANSISTOR VOLTAGE LIST

	B	C	E
Q3501	<5.1>	<11.6>	<4.4>
Q3502	<3.9>	<4.7>	GND
Q3505	<3.3>	<2.8>	GND
Q3506	<2.2>	<10.8>	GND
Q3507	<3.3>	<1.1>	GND
Q3508	<7.1>	<11.6>	<6.4>
Q3509	<0.7>	<0.1>	GND
Q3510	<6.8>	<1.2>	<0.1>
Q3511	<0.1>	<0.2>	GND

All voltages are in V.

• B2 BOARD WAVEFORMS



B2 BOARD : IC3503 MC14053BCP



B2 BOARD : IC3501 TDA2579B

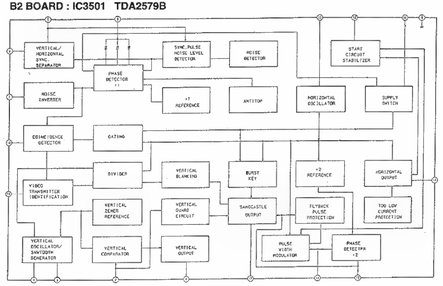

B2 BOARD : IC3502 TDA4650/V4



HA (REMOTE RECEIVER, LED)



HB (AV INPUT 3, FUNCTION KEY)





HC (POWER SWITCH)

B2 (SECAM) (KP-46S4/53S4 ONLY)

– B2 BOARD –

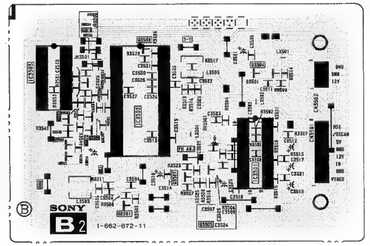

K (AUDIO POWER AMP, AUDIO AMP)

– K BOARD –

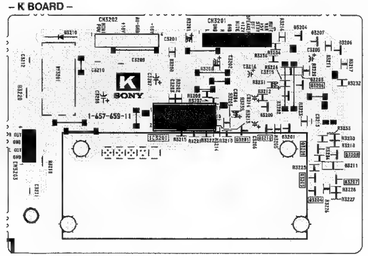

HA (REMOTE RECEIVER, LED)

– HA BOARD –



HC (POWER SWITCH)

– HC BOARD –



HB (AV INPUT 3, FUNCTION KEY)

– HB BOARD –

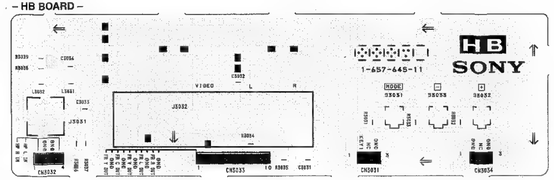

Schematic diagrams
← B2 K HA HB HC board B (1/4) board →

E (1/4) BOARD : IC1 MC14053BF

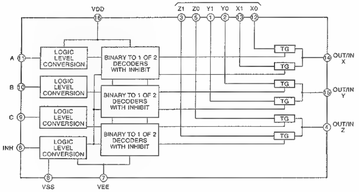

B (1/4) BOARD : IC2 TDA9141-N2C



B (1/4) BOARD : IC3 TDA4665T



B (1/4) BOARD : IC8 TDA9160A



B (1/4) BOARD : IC9 CXD2024AQ-TL



B (1/4) BOARD : IC6 NJM2240M (TE2)



B (1/4) BOARD : IC10 NJM2235M



B(1/4) BOARD TRANSISTOR VOLTAGE LIST

	B	C	E
Q1	3.2	7.6	2.6
Q2	2.6	7.6	2.0
Q3	0	GND	0.7
Q4	0	GND	0.7
Q5	0	GND	0.7
Q6	0	4.8	0.7
Q7	2.8	7.6	2.0
Q8	0.1	5.8	0
Q9	5.1	GND	5.7
Q10	0	8.8	4.4
Q11	3.8	0.3	GND
Q12	0.4	4.6	GND
Q13	2.5	4.8	2.3
Q14	4.6	4.4	4.8
Q17	2.7	8.0	2.0
Q18	3.0	8.0	2.4
Q19	3.0	8.0	2.4
Q20	5.1	4.8	5.5
Q22	7.0	2.7	8.0
Q23	1.1	4.8	1.5
Q24	2.3	7.0	1.7
Q25	0.5	GND	1.1
Q26	1.4	GND	2.0
Q27	0	5.0	GND
Q28	2.3	GND	3.0
Q29	1.5	GND	2.1
Q30	2.4	GND	3.0
Q31	0	4.7	0
Q32	2.4	0	GND
Q35	0	2.4	GND
Q36	0.7	7.6	0.7
Q37	0	7.6	0.7
Q38	0.1	4.4	GND
Q39	0	GND	0.7
Q40	0	0.7	GND
Q41	0	0.9	GND
Q42	1.6	8.5	1.0
Q43	0	0.6	GND

All voltages are in V.

B(1/4) BOARD IC VOLTAGE LIST

	Pin	Voltages		Pin	Voltages		Pin	Voltages
IC1	1	0		25	1.3 <1.7>	IC9	1	GND
	2	0.8		26	0.8		2	GND
	3	0		27	1.0		3	GND
	4	0.8		28	4.8		4	GND
	5	0.8	IC5	1	4.1		5	GND
	6	GND		2	1.0		6	GND
	7	GND		3	0.8		7	GND
	8	GND		4	1.3 <1.7>		8	GND
	9	1.9		5	1.9		9	GND
	10	1.9		6	2.0 (2.5) <1.1>		10	GND
	11	1.9		7	1.8 (1.5) <1.3>		11	2.5
	12	0.8		8	0.8 <1.3>		12	GND
	13	0		9	1.0 <1.8>		13	4.8
	14	1.0		10	0.8 <1.8>		14	0
	15	1.0		11	1.0 <1.8>		15	0
	16	0		12	2.5		16	0
IC2	1	2.5		13	GND		17	4.8
	2	2.5		14	—		18	4.8
	3	2.5		15	4.4		19	GND
	4	2.5		16	GND		20	4.6
	5	4.6		17	2.0 (2.5) <1.9>		21	1
	6	4.7		18	GND		22	0.5
	7	7.6		19	2.6		23	GND
	8	5.0		20	1.0		24	GND
	9	GND		21	2.5		25	1.5
	10	0.7		22	1.9		26	4.6
	11	0.1		23	2.3		27	2.4
	12	3.2		24	4.8		28	4.6
	13	2.6		25	GND		29	4.6
	14	2.6		26	GND		30	GND
	15	0.3		27	GND		31	1.4
	16	0.3		28	4.8		32	3.0
	17	0.3	IC6	1	2.4		33	3.0
	18	0.9		2	1.8		34	3.0
	19	4.8		3	GND		35	GND
	20	4.9		4	2.9		36	1.1
	21	4.9		5	3.0		37	4.7
	22	3.2		6	4.8		38	GND
	23	0.1		7	2.4		39	1.5
	24	3.9	IC7	1	4.8		40	3.9
	25	0		2	—		41	3.0
	26	3.9		3	GND		42	3.5
	27	0		4	GND		43	GND
	28	3.4		5	0.8		44	—
	29	4.7		6	—		45	—
	30	2.3		7	—		46	—
	31	1.5		8	GND		47	—
	32	0.4		9	4.8		48	—
IC3	1	4.8		10	GND		49	—
	2	—		11	3.1		50	—
	3	GND		12	3.1		51	—
	4	GND		13	—		52	GND
	5	0.7		14	1.4		53	4.8
	6	—		15	—		54	—
	7	—		16	1.4		55	—
	8	GND	IC8	1	2.3		56	4.8
	9	4.8		2	2.2		57	—
	10	GND		3	2.1		58	—
	11	3.0		4	4.4 (4.6) <4.6>		59	—
	12	3.0		5	4.5 (4.6) <4.3>		60	—
	13	—		6	0.7		61	—
	14	1.4		7	8.0		62	—
	15	—		8	5.0		63	—
	16	1.4		9	GND		64	—
IC4	1	4.1		10	0.3		65	—
	2	0.3		11	7.2		66	—
	3	4.5		12	3.6		67	4.8
	4	1.6		13	0		68	4.8
	5	0		14	2.1		69	0.5
	6	0.5		15	GND		70	0.5
	7	0		16	GND		71	GND
	8	GND		17	—		72	GND
	9	5		18	3.6		73	4.8
	10	0.3		19	0.3		74	4.8
	11	0.1		20	3.8 (4.0)		75	GND
	12	2.5		21	—		76	GND
	13	2.4		22	—		77	GND
	14	GND		23	—		78	GND
	15	4.7		24	—		79	GND
	16	4.7		25	8.0		80	GND
	17	2.5		26	3.3 (3.8)	IC10	1	4.4
	18	1.0 <1.8>		27	GND		2	0
	19	0.8 <1.6>		28	3.4		3	4.4
	20	1.0 <1.6>		29	4.3 (4.7) <4.3>		4	GND
	21	0.8 <1.3>		30	2.1 (2.3) <2.1>		5	3.6
	22	1.8 (1.5) <1.3>		31	1.7 (1.5) <1.3>		6	8.8
	23	2.0 (2.5) <1.1>		32	3.8 (0.8) <3.8>		7	3.7
	24	1.9					8	GND

All voltages are in V.
—: Blank Pin

• B (1/4) BOARD WAVEFORMS



WAVEFORMS B (1/4) BOARD

CIRCUIT WAVEFORM REFERENCE		PAL		SECAM		NTSC 3.58 4.43
1	A	1.2Vp-p(H)	B	1.0Vp-p(H)	C	1.1Vp-p(H)
2	D	0.6Vp-p(H)	E	0.4Vp-p(H)	D	0.6Vp-p(H)
3	G	0.7Vp-p(H)	G	1.2Vp-p(H)	G	0.6Vp-p(H)
4	H	0.8Vp-p(H)	H	1.5Vp-p(H)	H	0.7Vp-p(H)
5	D	1.2Vp-p(H)	E	0.8Vp-p(H)	D	0.9Vp-p(H)
6	I	0.8Vp-p(H)	I	1.0Vp-p(H)	I	0.8Vp-p(H)
7	J	0.9Vp-p(H)	J	1.0Vp-p(H)	J	0.7Vp-p(H)
8	K	0.9Vp-p(H)	K	0.9Vp-p(H)	K	0.7Vp-p(H)
9	I	0.9Vp-p(H)	I	0.9Vp-p(H)	I	0.7Vp-p(H)
10	J	0.9Vp-p(H)	J	0.9Vp-p(H)	J	0.7Vp-p(H)
11	K	0.8Vp-p(H)	K	0.8Vp-p(H)	K	0.8Vp-p(H)
12	I	0.9Vp-p(H)		—	I	0.8Vp-p(H)
13	J	0.9Vp-p(H)		—	J	0.8Vp-p(H)
14	K	0.8Vp-p(H)		—	K	0.8Vp-p(H)
15	A	1.2Vp-p(H)		—		—
16	N	0.9Vp-p(H)		—		—
17	F	1.3Vp-p(H)	F	1.1Vp-p(H)	F	1.1Vp-p(H)
18	G	1.2Vp-p(H)	G	1.0Vp-p(H)	G	1.0Vp-p(H)
19	H	1.7Vp-p(H)	H	1.5Vp-p(H)	H	1.3Vp-p(H)
20	C	2.5Vp-p(H)		—		—
21	D	2.3Vp-p(H)		—		—
22	C	2.3Vp-p(H)		—		—
23	M	1.6Vp-p(H)		—		—
24	C	1.9Vp-p(H)		—		—
25	D	2.7Vp-p(H)		—		—
26	N	2.6Vp-p(H)		—		—

B (1/4) (TWIN-PICTURE, FLICKER-FREE µCOM, OSD, TEXT, NICAM CHROMA DECODER

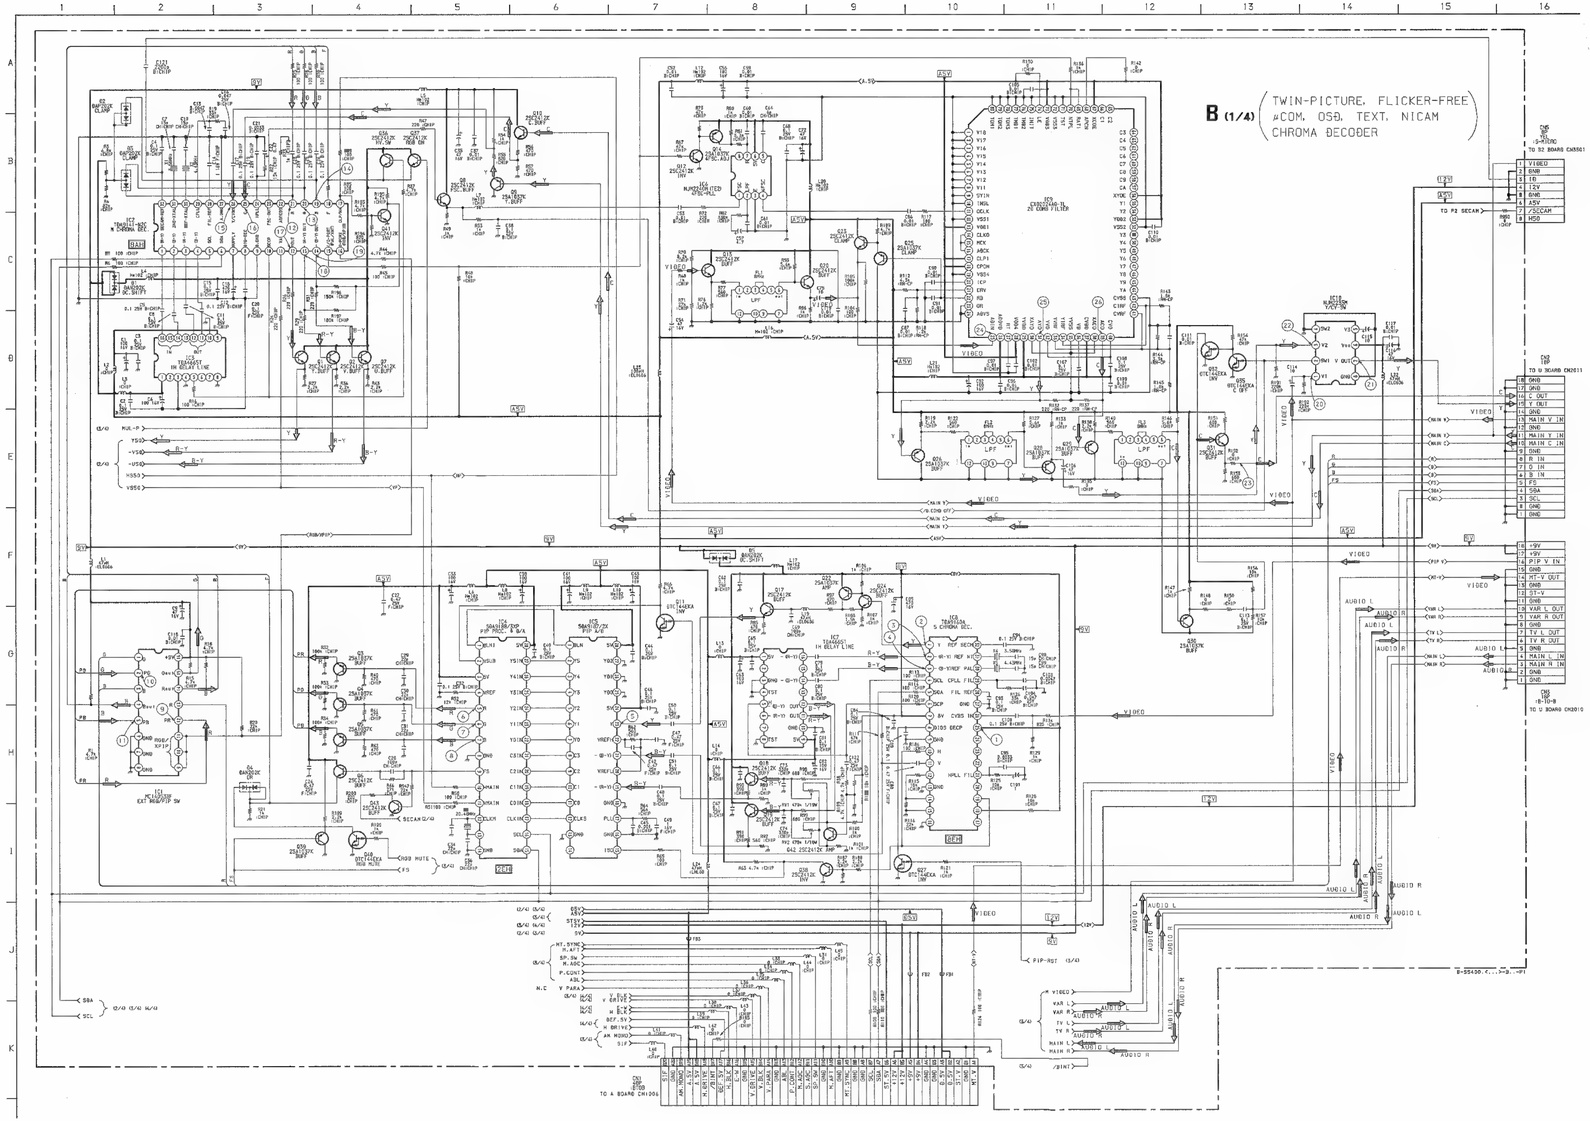

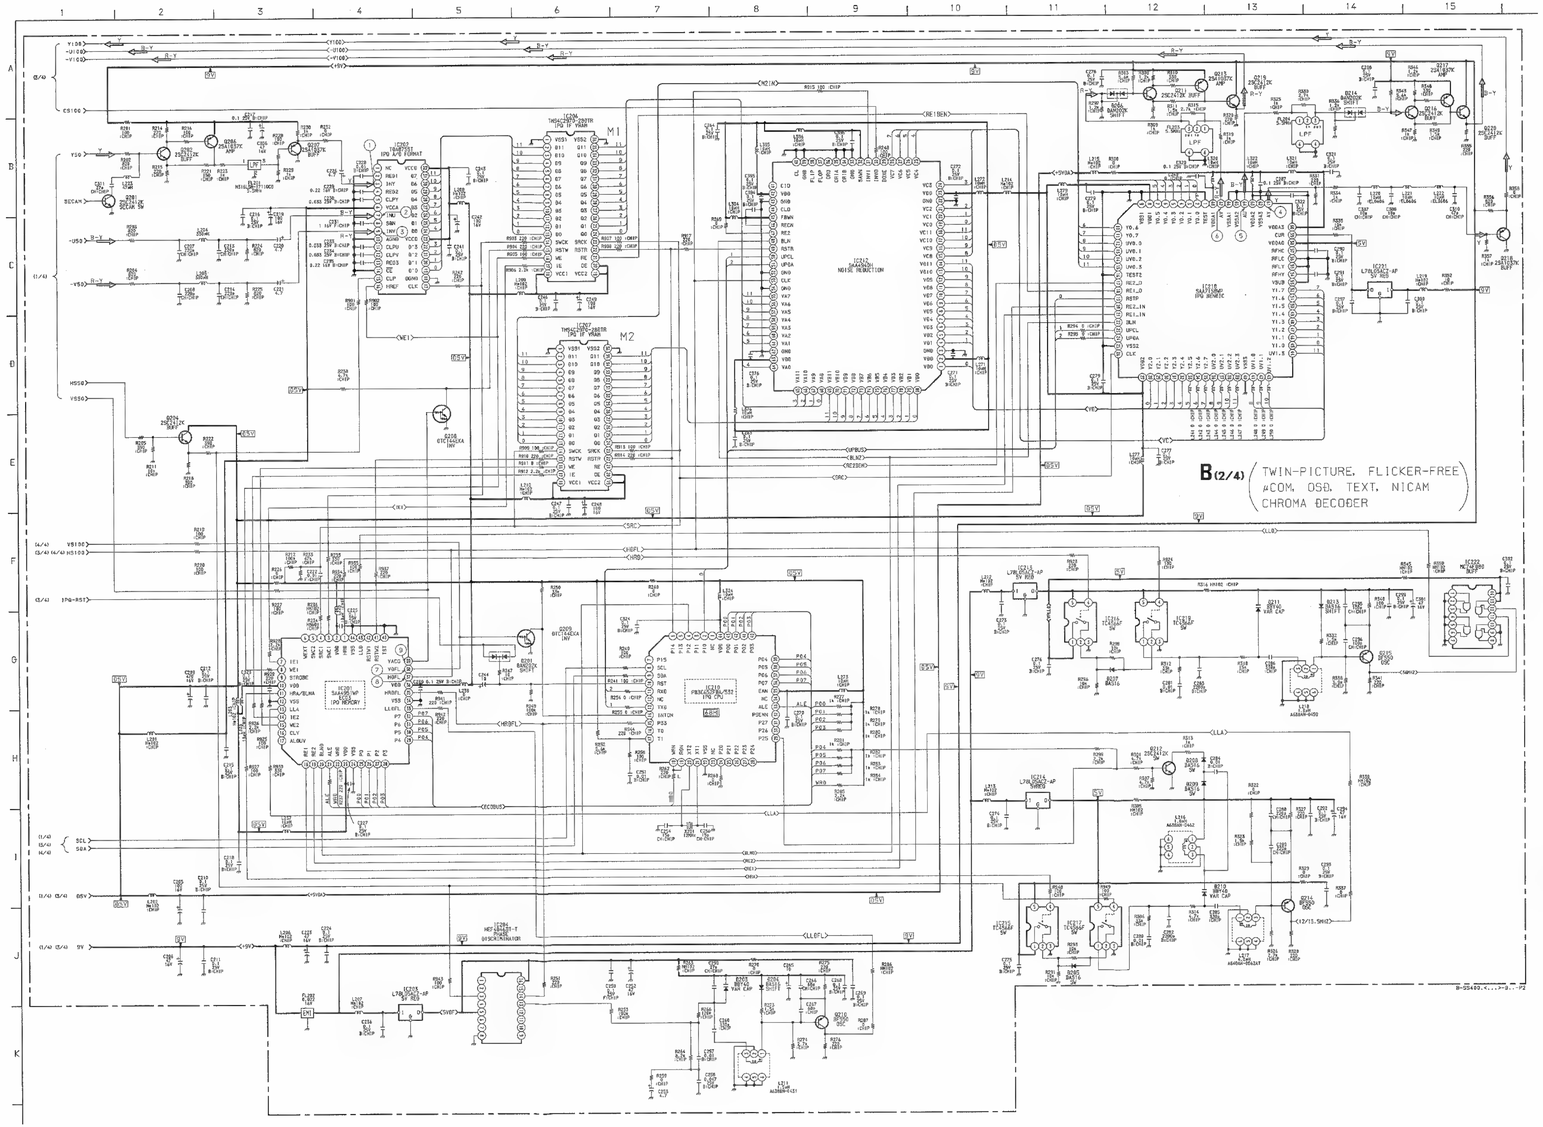

B(2/4) BOARD IC VOLTAGE LIST

	Pin	Voltages		Pin	Voltages		Pin	Voltages		Pin	Voltages
IC001	1	2.6		1	0.4		32	1.8		33	2.1
	2	4.8		4	–		33	1.8		34	GND
	3	1.7		5	5.0		34	1.8		35	GND
	4	2.4		6	–		35	1.2		36	–
	5	–		7	–		36	GND		37	–
	6	–		8	GND	IC210	1	–		38	–
	7	4.8		9	–		2	8		39	GND
	8	3.8		10	–		3	4.8		40	GND
	9	–		11	–		4	4.2		41	–
	10	4.8		12	–		5	0		42	4.8
	11	2.5		13	2.7		6	0.1		43	GND
	12	GND		14	2.5		7	0		44	–
	13	1.1		15	–		8	0		45	4.5
	14	4.8		16	5.0		9	4.8		46	4.8
	15	1.2	IC206	1	GND		10	0		47	4.2
	16	–		2	1.4		11	4.8		48	0
	17	–		3	1.4		12	–		49	4.7
	18	3.7		4	1.4		13	4.8		50	4.7
	19	3.7		5	2.7		14	4.8		51	4.7
	20	4.2		6	2.2		15	2.5		52	GND
	21	1.7		7	2.2		16	4.5		53	2.5
	22	4.8		8	2.0		17	0.1		54	GND
	23	4.8		9	2.2		18	4.8		55	1.0
	24	GND		10	1.4		19	4.8		56	1.0
	25	4.8		11	1.7		20	0		57	1.0
	26	4.8		12	1.4		21	2.2		58	2.4
	27	4.8		13	1.7		22	GND		59	2.1
	28	4.8		14	1.7		23	–		60	1.8
	29	4.8		15	4.8		24	0		61	2.1
	30	4.8		16	3.8		25	4.8		62	GND
	31	4.8		17	4.8		26	0		63	4.8
	32	4.8		18	4.8		27	0		64	2.1
	33	1.5		19	4.8		28	0		65	1.2
	34	GND		20	4.5		29	3.7		66	1.8
	35	2.5		21	3.3		30	–		67	1.8
	36	4.8		22	0		31	0		68	1.8
	37	0.4		23	2.5		32	–		69	1.2
	38	0		24	2.5		33	1.7		70	1.8
	39	0		25	2.5		34	–		71	1.8
	40	GND		26	2.5		35	5.0		72	1.8
	41	0		27	1.8		36	4.8		73	1.1
	42	0		28	2		37	4.8		74	1.1
	43	2.0		29	1.9		38	4.8		75	1.1
	44	GND		30	1.9		39	4.8		76	2.7
IC202	1	–		31	2.2		40	4.8		77	2.0
	2	2.8		32	2.5		41	4.8		78	2.0
	3	3.3		33	1.0		42	4.8		79	2.0
	4	1.8		34	1.0		43	4.8		80	2.0
	5	3.6		35	1.0		44	5.0	IC213	1	8.8
	6	4.8		36	GND	IC212	1	1.8		G	GND
	7	3.3	IC207	1	GND		2	4.8		O	5.0
	8	3.3		2	1.5		3	GND	IC214	1	8.8
	9	3.3		3	2.1		4	1.8		G	GND
	10	GND		4	2.1		5	1.8		O	5.0
	11	3.3		5	2.3		6	2.0	IC215	1	9.0
	12	3.3		6	1.3		7	2.3		2	2.6
	13	1.8		7	1.3		8	1.0		3	GND
	14	GND		8	1.3		9	1.0		4	2.5
	15	0.4		9	0		10	1.0		5	5.0
	16	3.8		10	2.7		11	1.6	IC216	1	5.0
	17	1.8		11	2.5		12	1.6		2	2.6
	18	GND		12	2.3		13	1.6		3	GND
	19	1.7		13	2.5		14	1.0		4	2.5
	20	1.4		14	2.5		15	1.6		5	5.0
	21	1.7		15	0		16	1.6	IC217	1	3.0
	22	1.4		16	4.8		17	1.6		2	3.6
	23	4.8		17	4.8		18	1.1		3	GND
	24	2.2		18	4.8		19	1.8		4	0.4
	25	3.0		19	4.8		20	1.8		5	5.0
	26	2.2		20	4.8		21	1.8	IC218	1	GND
	27	2.2		21	3.7		22	GND		2	2.5
	28	2.7		22	0		23	4.8		3	2.3
	29	1.4		23	2.5		24	1.8		4	2.5
	30	1.4		24	2.0		25	2.3		5	2.7
	31	1.4		25	2.0		26	0.9		6	0
	32	4.8		26	2.0		27	1.0		7	1.3
	33	–		27	2.0		28	1.0		8	5
	34	–		28	2.7		29	–		9	GND
	35	–		29	1.1		30	5.2		10	1.3
	36	–		30	1.1		31	0.4		11	1.3
	37	–		31	1.1		32	4.8		12	2.3
	38	–									
IC203	1	8.0									
	G	GND									
	O	5.0									
IC204	1	–									
	2	–									

Pin	Voltages
13	2.1
14	2.1
15	1.5
16	GND
17	3.7
18	3.7
19	0
20	3.7
21	3.7
22	3.7
23	4.8
24	4.8
25	GND
26	2.5
27	4.8
28	1.8
29	1.8
30	1.8
31	2.0
32	3.7
33	1.0
34	1.0
35	1.0
36	1.6
37	1.6
38	1.6
39	1.0
40	GND
41	1.6
42	1.6
43	1.6
44	1.1
45	1.8
46	1.8
47	1.8
48	1.8
49	2.3
50	1.0
51	1.0
52	1.0
53	GND
54	2.3
55	2.3
56	GND
57	0
58	5.0
59	1.1
60	4.8
61	0.2
62	GND
63	4.8
64	1.3
65	GND
66	GND
67	1.3
68	5.0
IC219	1 4.2
	2 2.6
	3 GND
	4 0.4
	5 GND
	6 –
	7 GND
	8 –
	9 GND
	10 GND
	11 1.5
	12 1.9
	13 5.0
	14 5.0
IC221	1 8.8
	G GND
	O 5.0
IC222	1 GND
	2 GND
	3 –
	4 GND
	5 GND
	6 –
	7 GND
	8 –
	9 GND
	10 GND
	11 1.5
	12 1.9
	13 5.0
	14 5.0

All voltages are in V.
–: Blank Pin

B(2/4) BOARD TRANSISTOR VOLTAGE LIST

	B	C	E
Q001	0.6	2.5	GND
Q002	2.5	6.8	1.7
Q004	0.3	4.8	0.3
Q006	6.8	2.8	7.5
Q007	1.4	GND	2.0
Q008	0	4.9	GND
Q009	0	4.9	GND
Q010	3.1	1.5	3.7
Q011	2.0	8.4	1.4
Q012	0.8	8	GND
Q013	8.2	3.3	8.8
Q014	3.4	1.1	4.0
Q015	3.4	1.9	4.3
Q016	2.0	8.4	1.4
Q017	8.4	3.0	8.8
Q018	0.4	GND	1.1
Q019	3.3	8.8	2.7
Q020	3.0	8.8	2.4

All voltages are in V.

B (2/4) BOARD : IC201 SAA4951WP



B (2/4) BOARD : IC204 HEF4046BT



• B (2/4) BOARD WAVEFORMS



Schematic diagrams
← B (2/4) board B (3/4) board →

B (3/4) BOARD : IC408 TDA4780

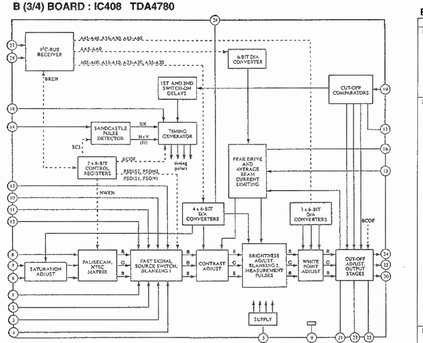

B (3/4) BOARD : IC413 NJM2234M



B (3/4) BOARD : IC414 MC74HC4053F-T2



B (3/4) BOARD : IC601 CX20125



B (3/4) BOARD IC VOLTAGE LIST

	Pin	Voltages		Pin	Voltages		Pin	Voltages		Pin	Voltages
IC401	1	GND		57	0.2		15	2.5		22	1.8
	2	GND		58	0		16	2.5		23	4.5
	3	GND		59	0.2		17	–		24	1.2
	4	GND		60	0.2		18	–		25	4.3
	5	5.0		61	4.7		19	4.7		26	4.3
	6	5.0		62	–		20	4.4		27	11.8
	7	GND		63	–		21	–		28	2.1
	8	5.0		64	–		22	–		29	9.7
IC402	1	1.8		65	–		23	–		30	2.3
	2	4.9		66	GND		24	–	IC410	1	4.8
	3	4.7		67	4.6		25	0		2	0.7
	4	–		68	–		26	0		3	4.8
	5	–	IC404	1	5.0		27	2.5		4	4.8
	6	–		2	0		28	0		5	GND
	7	–		3	5.1		29	–		6	GND
	8	–		4	0		30	–		7	4.8
	9	2.5		5	–		31	–		8	GND
	10	2.5		6	–		32	–		9	4.5
	11	2.5		7	0		33	–		10	0.7
	12	2.5		8	0		34	4.8		11	4.4
	13	4.8		9	0		35	GND		12	–
	14	2.5		10	0		36	0		13	–
	15	2.5		11	0		37	0		14	–
	16	2.5		12	5.0		38	0		15	–
	17	2.5		13	5.0		39	0		16	4.8
	18	2.5		14	5.0	IC407	40	GND	IC411	1	1.6
	19	–		15	5.0		41	4.9		2	5.0
	20	–		16	5.0		42	0.4		3	5.0
	21	–		17	5.0		43	GND		4	GND
	22	2.5		18	5.0		44	–		5	4.3
	23	–	IC406	1	5.0		45	–		6	5.0
	24	4.8		2	5.0		46	–		7	0.8
	25	1.8		3	GND		47	–		8	8.8
	26	GND		4	5.0	IC412	1	6.0		9	5.0
IC403	1	–		23	0		2	11.4		2	3.0
	2	–		24	5.0		3	6.0		3	3.0
	3	–		25	5.0		4	GND		4	3.0
	4	–		26	GND		5	1.3		5	0.5
	5	–		27	0		6	0.8		6	0.5
	6	–		28	2.5		7	0.9		7	GND
	7	–		29	2.5		8	1.3		8	3.0
	8	4.4		30	5.0	IC408	1	5.2		9	3.0
	9	4.4		31	0		2	5.2		10	3.0
	10	GND		32	–		3	5.2		11	3.0
	11	4.8		33	GND		4	5.2		12	0.4
	12	GND		34	5.0		5	8.2		13	0.4
	13	–		35	5.0		6	4.1		14	4.8
	14	–		36	2.5		7	4.1	IC413	1	5.0
	15	GND		37	5.0		8	3.9		2	0
	16	GND		38	0		9	GND		3	5.4
	17	–		39	2.7		10	5.2		4	0
	18	–		40	2.7		11	5.2		5	5.4
	19	GND		41	0		12	5.2		6	4.8
	20	2.5		42	0		13	0		7	4.7
	21	2.1		43	0		14	1.3		8	GND
	22	GND		44	0		15	4.1	IC414	1	2.5
	23	0		45	0		16	3.3		2	2.5
	24	1.6		46	0		17	3.2		3	2.5
	25	1.6		47	4.8		18	2.3		4	2.5
	26	4.8		48	5.0		19	1.6		5	2.5
	27	GND		49	4.7		20	2.0		6	GND
	28	3.9		50	5.0		21	2.9		7	GND
	29	2.7		51	–		22	2.0		8	GND
	30	3.9		52	3.6		23	2.9		9	0
	31	3.9		53	3.6		24	2.3		10	0
	32	GND		54	3.6		25	3.1		11	0
	33	3.9		55	5.0		26	4.5		12	2.6
	34	3.9		56	5.0		27	4.5		13	2.6
	35	GND		57	5.0		28	4.5		14	2.6
	36	3.9		58	5.0	IC409	1	GND		15	2.6
	37	3.9		59	0.5		2	4.4		16	4.8
	38	GND		60	0.5		3	4.1	IC415	1	0.8
	39	3.9		61	0		4	1.4		2	4.8
	40	3.9		62	–		5	0.7		3	4.8
	41	3.9		63	–		6	0.7		4	GND
	42	3.9		64	0		7	7.0		5	4.8
	43	GND	IC405	1	2.8		8	7.0		6	4.8
	44	7.3		2	0		9	6.1		7	0.8
	45	8.4		3	1.8		10	5.7		8	8.1
	46	7.3		4	4.9		11	5.7	IC601	1	8.4
	47	3.9		5	4.7		12	11.8		2	0.8
	48	3.9		6	4.8		13	2.5		3	0.8
	49	GND		7	4.5		14	6.2		4	GND
	50	–		8	2.5		15	4.1		5	7.6
	51	–		9	2.5		16	2.5		6	0.1
	52	GND		10	2.5		17	GND		7	5.8
	53	3.9		11	2.5		18	2.0		8	11.8
	54	3.9		12	2.5		19	11.8			
	55	GND		13	2.5		20	2.0			
	56	0.2		14	2.5		21	1.8			

All voltages are in V.
– : Blank Pin

B(3/4) BOARD TRANSISTOR VOLTAGE LIST

	B	C	E
Q401	6.3	11.8	5.7
Q402	11.3	6.3	11.8
Q403	6.4	11.6	5.8
Q404	6.2	11.6	5.0
Q405	3.0	11.3	2.4
Q406	5.7	11.8	5.0
Q407	5.8	GND	4.5
Q408	4.0	GND	4.5
Q409	0	5.0	GND
Q410	2.6	GND	3.2
Q411	3.1	8	GND
Q412	0	3.1	GND
Q413	0	GND	0.8
Q414	0.2	GND	0.8
Q415	0.2	GND	0.8
Q416	0.2	GND	0.8
Q417	5.5	GND	6.3
Q418	11.5	6.2	11.8
Q419	4.4	0.7	GND
Q420	0.6	4.5	GND
Q421	0	2.6	GND
Q422	0	2.6	GND
Q423	0	2.6	GND
Q424	0.7	0	GND
Q425	2.1	GND	2.4
Q426	2.0	GND	2.4
Q427	10.1	2.5	10.8
Q428	2.5	GND	2.0
Q429	11.5	9	GND
Q430	1.3	8.8	1.3
Q431	3.8	GND	4.4
Q432	9.0	1.4	9.2
Q433	2.4	4.8	1.8
Q434	2.5	4.8	1.8
Q435	6.9	6.9	6.3
Q436	3.3	6.3	2.7
Q437	4.6	6.8	3.9
Q438	4.4	6.8	3.8
Q439	6.9	6.9	6.3
Q440	4.3	GND	4.5
Q441	1.1	2.5	0.5
Q442	3.3	6.3	2.5
Q443	6.3	8.8	5.9
Q444	0	0	0
Q445	4.4	8.1	3.8
Q446	5.0	8.8	4.5
Q447	3.9	GND	4.5
Q448	2.2	5.6	1.6
Q449	3.1	4.8	2.4
Q450	10.1	13.1	10.7
Q451	6.3	8.8	5.6
Q452	2.7	8.8	2.6
Q453	1.3	GND	1.7
Q454	3.1	4.8	2.5
Q455	4.7	8.8	4.0
Q456	1.6	0	GND
Q457	3.0	4.8	2.5
Q458	5.4	8.6	4.7
Q459	2.5	GND	3.0
Q460	2.0	5.4	1.4
Q461	2.1	6.2	2.5
Q462	1.8	GND	2.5
Q463	5.7	8.8	5.1
Q464	2.1	6.2	1.5
Q465	2.8	4.8	2.0
Q466	6.2	8.8	5.6
Q467	1.0	GND	1.7
Q468	0.5	2.6	GND
Q469	0.5	2.6	GND
Q470	0.5	0	GND
Q471	0	0	0
Q472	0.6	0	GND
Q473	0	0	GND
Q474	0	0	GND
Q475	0.7	11.8	0
Q476	0	0	GND
Q477	0	0	GND
Q479	4.4	8.1	3.8
Q601	2.6	GND	3.2
Q602	0.8	3.2	4.6
Q603	0.8	2.0	0.3
Q604	2.5	0.9	3.0
Q605	2.0	GND	2.7
Q606	0.8	0.9	0.3
Q607	7.6	11.8	7.0

All voltages are in V.

B(3/4) BOARD ※MARK LIST

	KP-46S4/46S4W/53S4/53S4U	KP-45S4W/53S4K
IC404	CXP85460-037Q	CXP85460-047Q
IC405	TPU3904TC-T20	TPU3041TC-22-TP
IC411	BA10298F-E2	LM393PS-E2D
IC415	BA10358F-E2	LM358DR-EZ

• B (3/4) BOARD WAVEFORMS

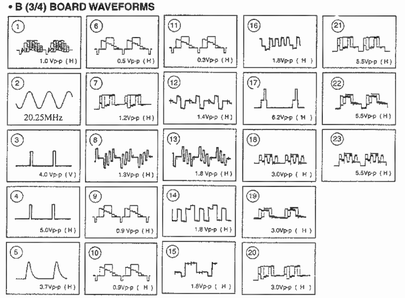

B (3/4) BOARD

(TWIN-PICTURE, FLICKER-FREE
μCOM, OSD, TEXT, NICAM,
CHROMA DECODER

B (4/4) BOARD : IC801 LA7856A

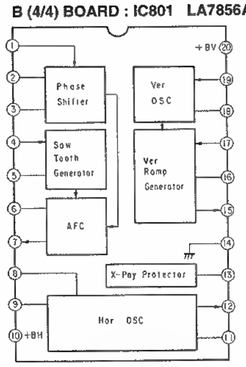

B (4/4) BOARD : IC802 MC74HC74AF-T2



B(4/4) BOARD ＊MARK LIST

	KP-46S4/46S4V/53S4/53S4U	KP-46S4K/53S4K
IC804	BA10358F-E2	LM358DR-EZ

• B (4/4) BOARD WAVEFORMS



B BOARD

DIODE		＊
D1	C-10	⑥
D2	N-9	⑥
D3	N-9	⑥
D4	D-9	⑥
D5	K-10	⑥
D201	O-7	⑥
D203	C-8	⑥
D204	N-6	⑥
D205	M-7	⑥
D206	E-6	⑥
D207	L-6	⑥
D208	C-7	⑥
D209	C-7	⑥
D210	C-7	⑥
D211	D-6	⑥
D213	D-6	⑥
D214	F-6	⑥
D402	B-1	⑥
D403	N-2	⑥
D404	F-2	⑥
D405	N-4	⑥
D406	N-4	⑥
D407	O-5	⑥
D408	O-5	⑥
D410	B-5	⑥
D411	B-5	⑥
D412	B-5	⑥
D414	N-5	⑥
D415	M-5	⑥
D416	E-5	⑥
D417	O-6	⑥
D418	D-5	⑥
D419	L-5	⑥
D420	L-5	⑥
D421	K-5	⑥
D422	B-5	⑥
D424	E-5	⑥
D425	N-4	⑥
D426	B-3	⑥
D427	C-5	⑥
D801	G-5	⑥
D803	G-4	⑥
D804	G-4	⑥

IC		
IC1	M-9	
IC2	M-9,C-9	
IC3	C-10	
IC4	D-10	
IC5	E-10	
IC6	N-8	
IC7	F-10	
IC8	J-9,F-9	
IC9	B-8	
IC10	O-10	
IC201	D-6	
IC202	O-8	
IC203	N-6,B-6	
IC204	B-7	
IC206	D-8	
IC207	E-7	
IC210	B-6	
IC212	E-8	
IC213	E-6,K-6	
IC214	N-7,C-7	
IC215	M-7	
IC216	L-6	
IC217	M-7	
IC218	F-8	
IC219	L-8	
IC221	J-7,F-7	
IC222	L-6	
IC401	N-1	
IC402	B-1	
IC403	F-2	
IC404	C-2	
IC405	B-2	
IC406	N-2	
IC407	D-1	
IC408	M-4,C-4	
IC409	N-4,B-4	
IC410	B-5	
IC411	C-5	
IC412	E-5	
IC413	O-3	
IC414	E-5	
IC415	E-2	
IC801	L-4,D-4	
IC801	I-5,G-5	
IC802	F-5	
IC804	F-5	
IC805	F-4	

TRANSISTOR		＊
Q1	N-9	①
Q2	N-9	①
Q3	D-10	④
Q4	D-10	④
Q5	D-9	④
Q6	L-9	①
Q7	N-9	①
Q8	N-8	①
Q9	D-9	④
Q10	D-9	④
Q11	D-10	④
Q12	B-8	④
Q13	N-9	①
Q14	B-8	④
Q15	N-10	①
Q16	B-10	④
Q17	K-5	①
Q18	K-9	①
Q19	K-9	①
Q20	N-9	①
Q21	N-10	①
Q22	K-10	①
Q23	B-8	④
Q24	K-10	①
Q25	B-8	④
Q26	O-9	①
Q27	O-9	①
Q28	O-10	①
Q29	O-9	①
Q30	A-10	④
Q31	O-10	①
Q32	A-10	④
Q34	O-10	①
Q35	B-10	④
Q36	C-9	④
Q37	C-9	④
Q38	E-9	④
Q39	D-9	④
Q40	L-9	①
Q41	M-9	①
Q42	F-9	④
Q43	L-9	①
Q201	A-7	④
Q202	O-8	①
Q204	N-7	①
Q206	O-8	①
Q207	A-7	④
Q208	D-9	④
Q209	B-7	④
Q210	N-6	①
Q211	D-6	④
Q212	D-6	④
Q213	F-6	④
Q214	C-7	④
Q215	D-6	④
Q216	F-6	④
Q217	F-6	④
Q218	J-6	①
Q219	K-6	①
Q220	K-6	①
Q401	J-1	①
Q402	J-1	①
Q403	G-1	①
Q404	I-1	①
Q406	G-1	③
Q406	G-2	④
Q407	J-2	①
Q408	J-2	①
Q409	N-2	①
Q410	O-2	①
Q411	N-2	①
Q412	B-2	④
Q413	K-3	①
Q414	J-2	①
Q415	J-2	①
Q416	K-2	①
Q417	G-1	④
Q418	J-1	①
Q419	B-5	④
Q420	N-5	①
Q421	A-5	④
Q422	A-5	①
Q423	A-5	④
Q424	N-4	①
Q425	O-4	①
Q426	O-4	①
Q427	N-5	①
Q428	O-5	①
Q429	I-2	①
Q430	N-5	①
Q431	N-5	①
Q432	O-5	①
Q433	E-4	④
Q434	E-4	④
Q435	M-5	①
Q436	M-5	①
Q437	L-5	①
Q438	D-5	④
Q439	M-5	①
Q440	L-5	①
Q441	M-5	①
Q442	M-5	①
Q443	M-5	①
Q444	H-3	①
Q445	G-3	①
Q446	D-5	③
Q447	L-5	①
Q448	M-4	①
Q449	F-4	④
Q450	N-5	①
Q451	M-5	①
Q452	D-5	④
Q453	C-5	④
Q454	K-5	①
Q455	O-5	①
Q456	I-2	①
Q457	E-5	①
Q458	L-5	①
Q459	K-5	①
Q460	D-4	④
Q461	A-4	④
Q462	E-5	①
Q463	O-4	④
Q464	D-5	④
Q465	E-5	①
Q466	E-5	④
Q467	D-4	④
Q468	A-4	④
Q469	A-4	④
Q470	A-4	④
Q471	E-1	④
Q472	M-1	①
Q473	E-2	④
Q474	E-2	①
Q475	L-4	①
Q476	E-1	①
Q477	E-1	①
Q479	G-3	④
Q601	D-5	④
Q602	D-5	①
Q603	L-3	①
Q604	D-5	①
Q805	L-3	①
Q806	D-5	①
Q807	L-3	①
Q801	G-5	④
Q803	G-4	④
Q804	G-4	④
Q805	J-6	①
Q806	J-6	①

VARIABLE RESISTOR	
RV1	K-9,E-9
RV2	K-9,E-9
RV801	J-4,G-4

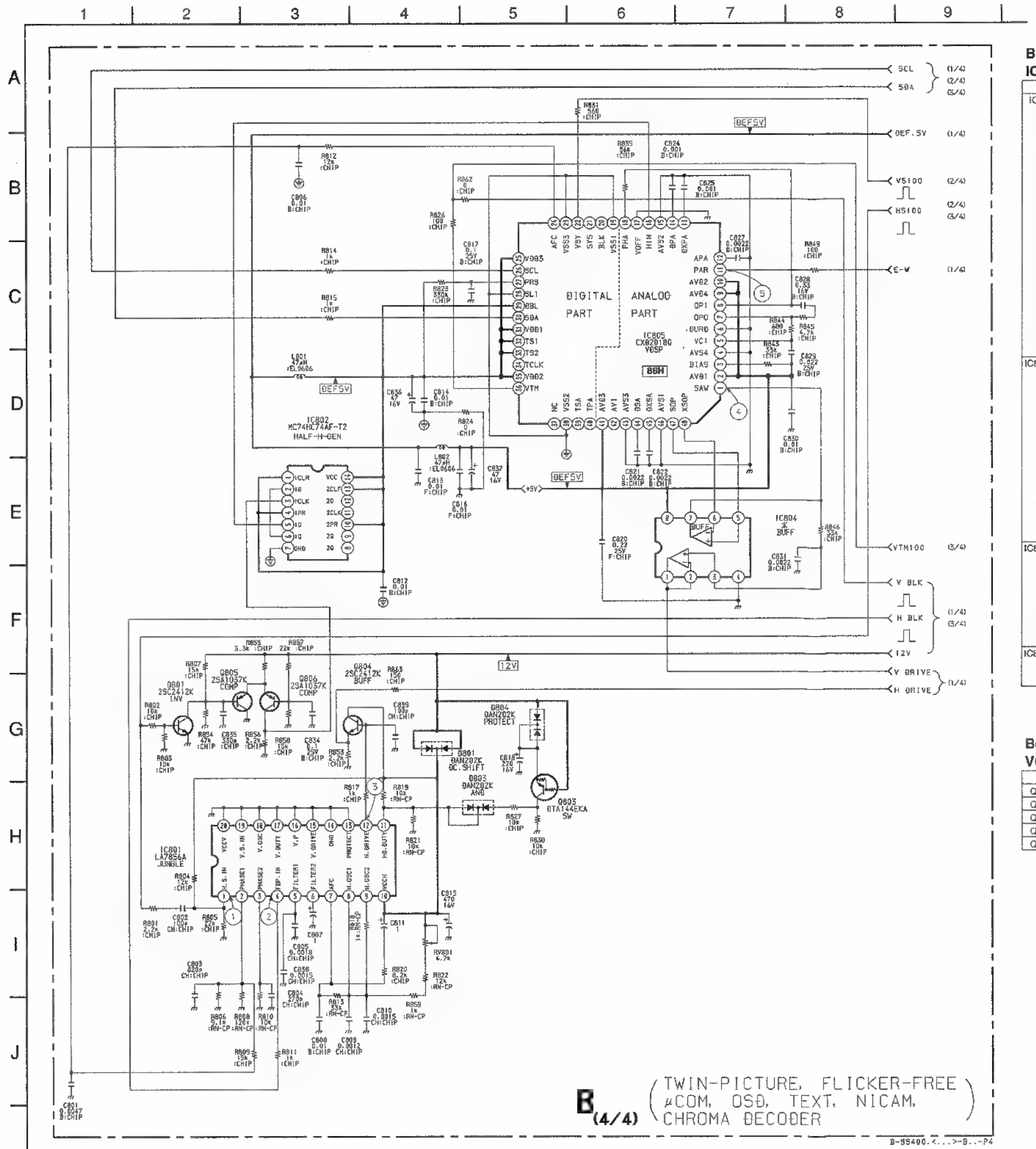

B (4/4) (TWIN-PICTURE, FLICKER-FREE μCOM, OSD, TEXT, NICAM, CHROMA DECODER)

B-95400.<...>-B..-P4

B(4/4) BOARD IC VOLTAGE LIST

	Pin	Voltages	Pin	Voltages
IC801	1	7.3	4	GND
	2	7.3	5	2.3
	3	7.8	6	GND
	4	0.4	7	2.3
	5	3.7	8	2.6
	6	2.9	9	5.0
	7	6.4	10	5.0
	8	5.9	11	2.3
	8	5.5	12	2.3
	10	11.3	13	1.7
	11	5.7	14	1.4
	12	4.5	15	GND
	13	GND	16	2.5
	14	GND	17	GND
	15	GND	18	2.6
	16	GND	19	GND
	17	GND	20	0.6
	18	GND	21	–
	19	GND	22	0
	20	GND	23	0
IC802	1	5.0	24	0.9
	2	2.5	25	5.0
	3	3.4	26	4.4
	4	5.0	27	4.8
	5	2.5	28	GND
	6	2.5	29	5.0
	7	GND	30	4.3
	8	–	31	5.0
	9	0.6	32	5.0
	10	5.0	33	5.0
	11	0.4	34	–
	12	0	35	5.0
	13	5.0	36	2.6
	14	5.0	37	–
IC804	1	1.9	38	GND
	2	1.9	39	–
	3	1.9	40	–
	4	GND	41	5.0
	5	1.8	42	–
	6	1.8	43	GND
	7	1.8	44	1.5
	8	5.0	45	1.5
IC805	1	1.9	46	GND
	2	5.0	47	1.8
	3	1.7	48	1.8

All voltages are in V.
–: Blank Pin

B(4/4) BOARD TRANSISTOR VOLTAGE LIST

	B	C	E
Q801	0.1	6.9	GND
Q803	12.0	0	11.9
Q804	4.5	11.3	4.5
Q805	6.9	GND	4.8
Q806	4.9	3.4	4.8

All voltages are in V.

B (TWIN-PICTURE, FLICKER-FREE, μ COM, OSD, TEXT, NICAM, CHROMA DECODER)

NOTE:
- ▒▒▒ : Pattern from the side which enables seeing.
- ▒▒▒ : Pattern of the rear side.

– B BOARD –

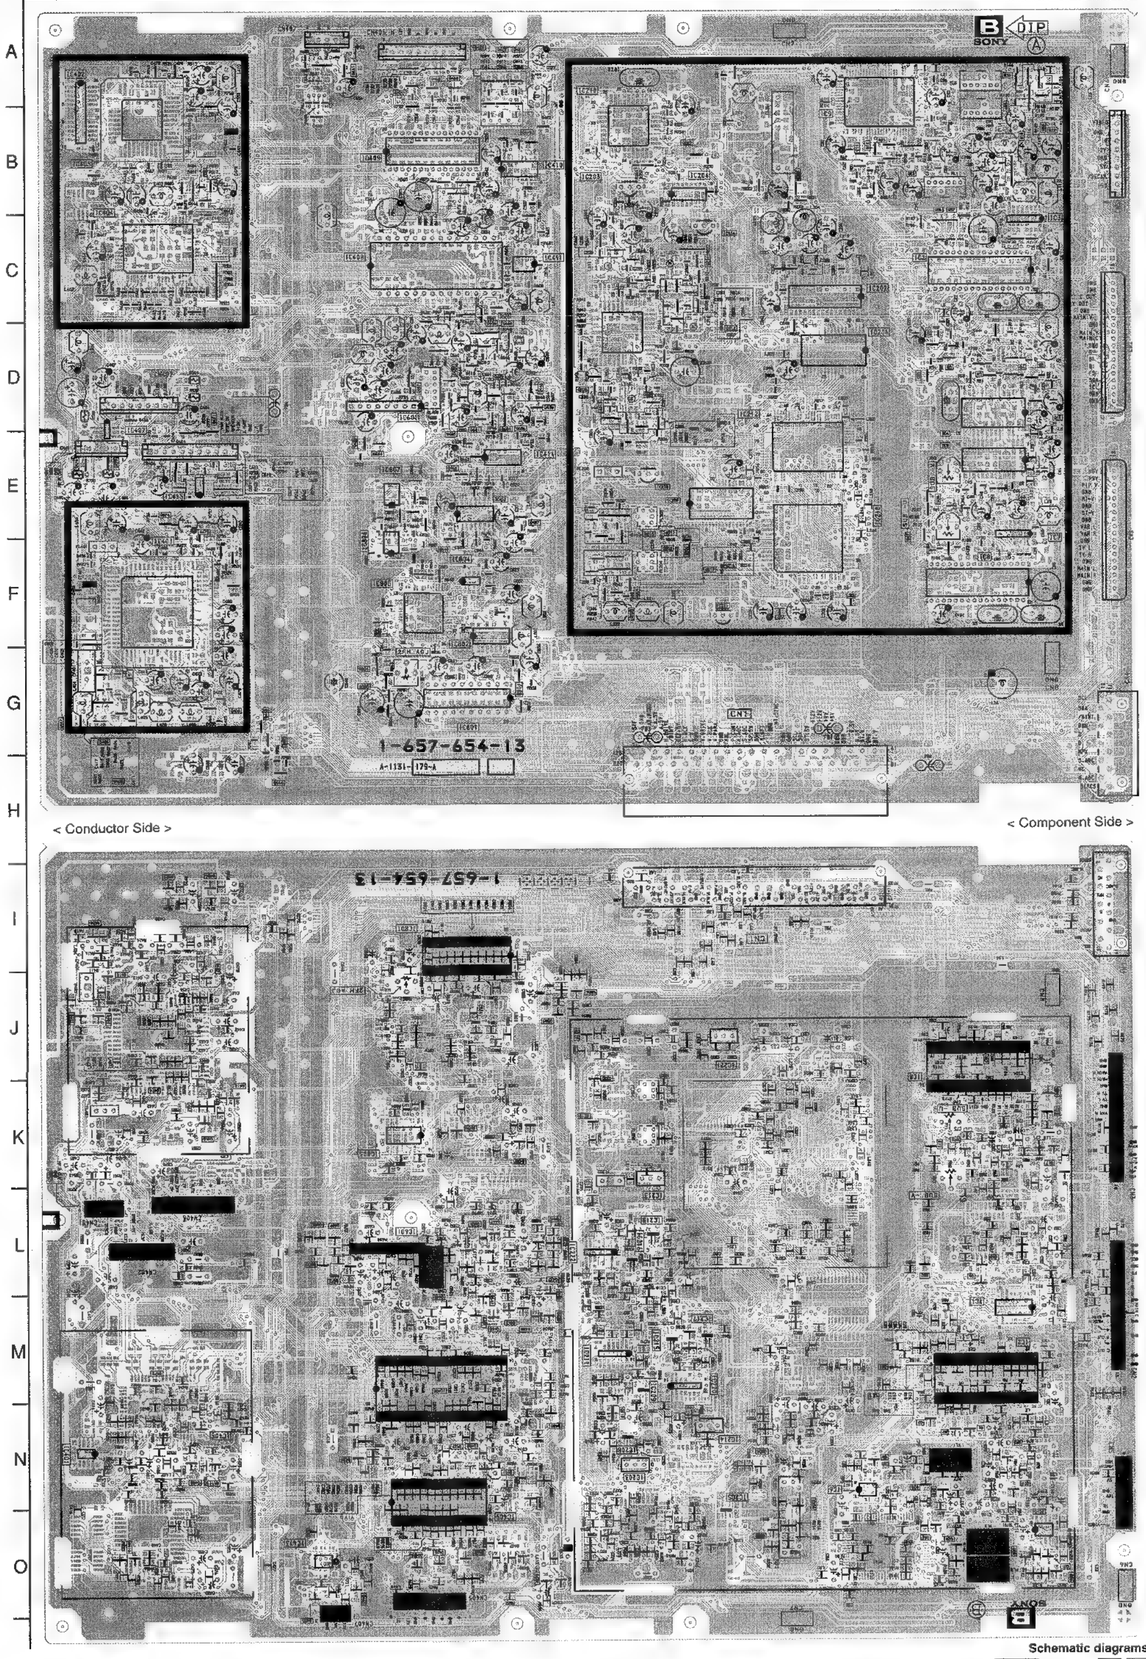

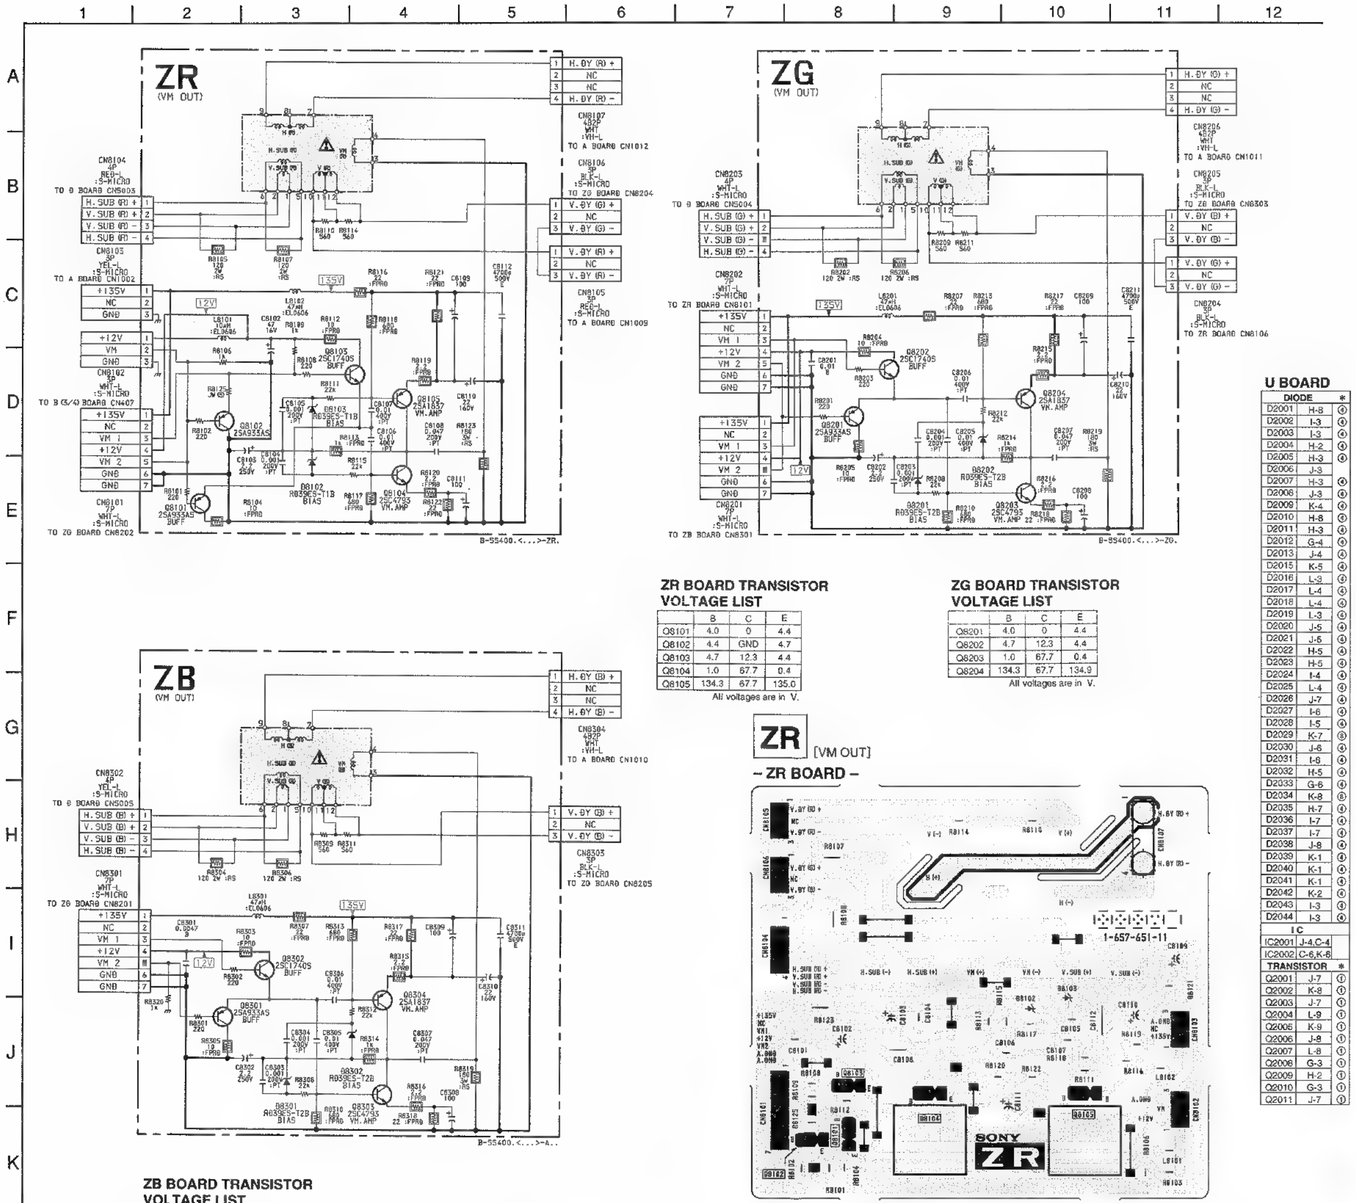

ZR BOARD TRANSISTOR VOLTAGE LIST

	B	C	E
Q8101	4.0	0	4.4
Q8102	4.4	GND	4.7
Q8103	4.7	12.3	4.4
Q8104	1.0	67.7	0.4
Q8105	134.3	67.7	135.0

All voltages are in V.

ZG BOARD TRANSISTOR VOLTAGE LIST

	B	C	E
Q8201	4.0	0	4.4
Q8202	4.7	12.3	4.4
Q8203	1.0	67.7	0.4
Q8204	134.3	67.7	134.9

All voltages are in V.

ZB BOARD TRANSISTOR VOLTAGE LIST

	B	C	E
Q8301	4.0	0	4.4
Q8302	4.7	12.3	4.4
Q8303	1.0	67.7	0.4
Q8304	134.3	67.7	134.9

All voltages are in V.

ZR [VM OUT]

– ZR BOARD –

ZG [VM OUT]

– ZG BOARD –

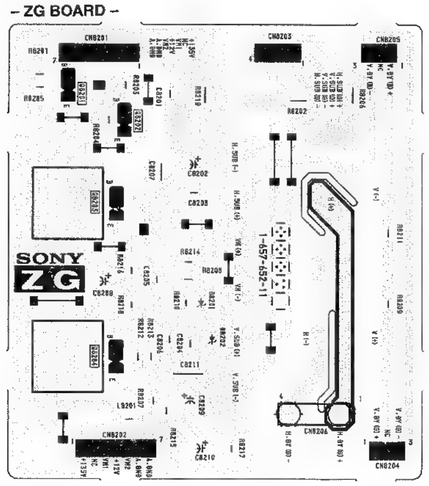

ZB [VM OUT]

– ZB BOARD –

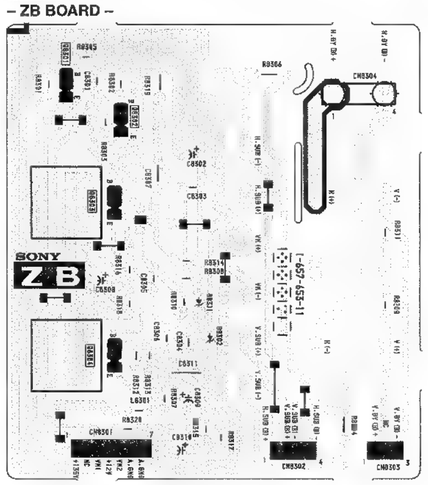

U BOARD

DIODE	*
D2001	H-8
D2002	I-3
D2003	I-3
D2004	H-2
D2005	H-3
D2006	J-3
D2007	H-3
D2008	J-3
D2009	K-4
D2010	H-8
D2011	H-3
D2012	G-4
D2013	J-4
D2015	K-5
D2016	L-3
D2017	L-4
D2018	L-4
D2019	L-3
D2020	J-5
D2021	J-5
D2022	H-5
D2023	H-5
D2024	I-4
D2025	L-4
D2026	J-7
D2027	I-6
D2028	I-5
D2029	K-7
D2030	J-6
D2031	I-6
D2032	H-5
D2033	G-8
D2034	K-8
D2035	H-7
D2036	I-7
D2037	I-7
D2038	J-8
D2039	K-1
D2040	K-1
D2041	K-1
D2042	K-2
D2043	I-3
D2044	I-3

IC	
IC2001	J-4,C-4
IC2002	C-6,K-6

TRANSISTOR	*
Q2001	J-7
Q2002	K-8
Q2003	J-7
Q2004	L-9
Q2005	K-9
Q2006	J-8
Q2007	L-8
Q2008	G-3
Q2009	H-2
Q2010	G-3
Q2011	J-7

U [A/V SWITCH, P IN P, AV-INPUT/OUTPUT, AUDIO LINE OUTPUT]

– U BOARD –

NOTE:
- : Pattern from the side which enables seeing.
- : Pattern of the rear side.

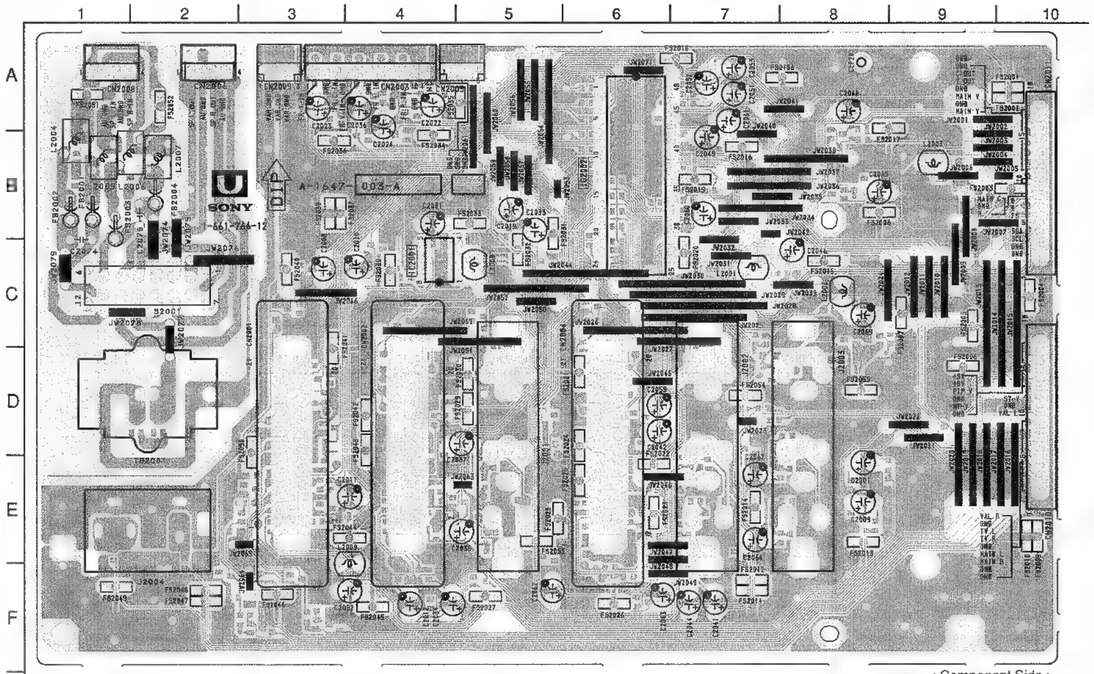

< Component Side >

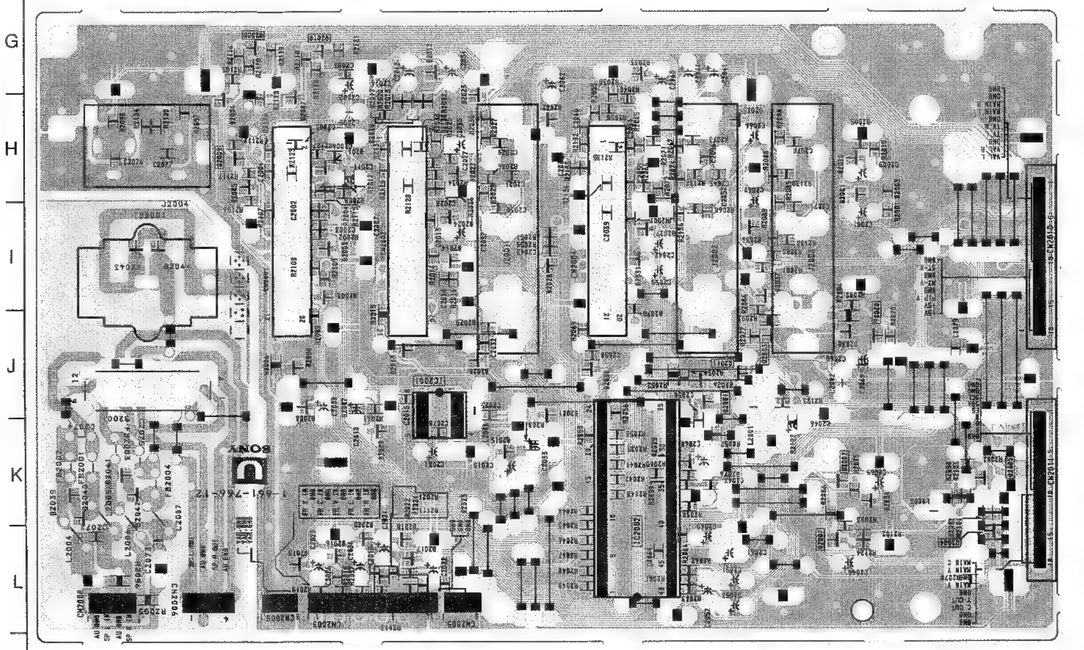

< Conductor Side >

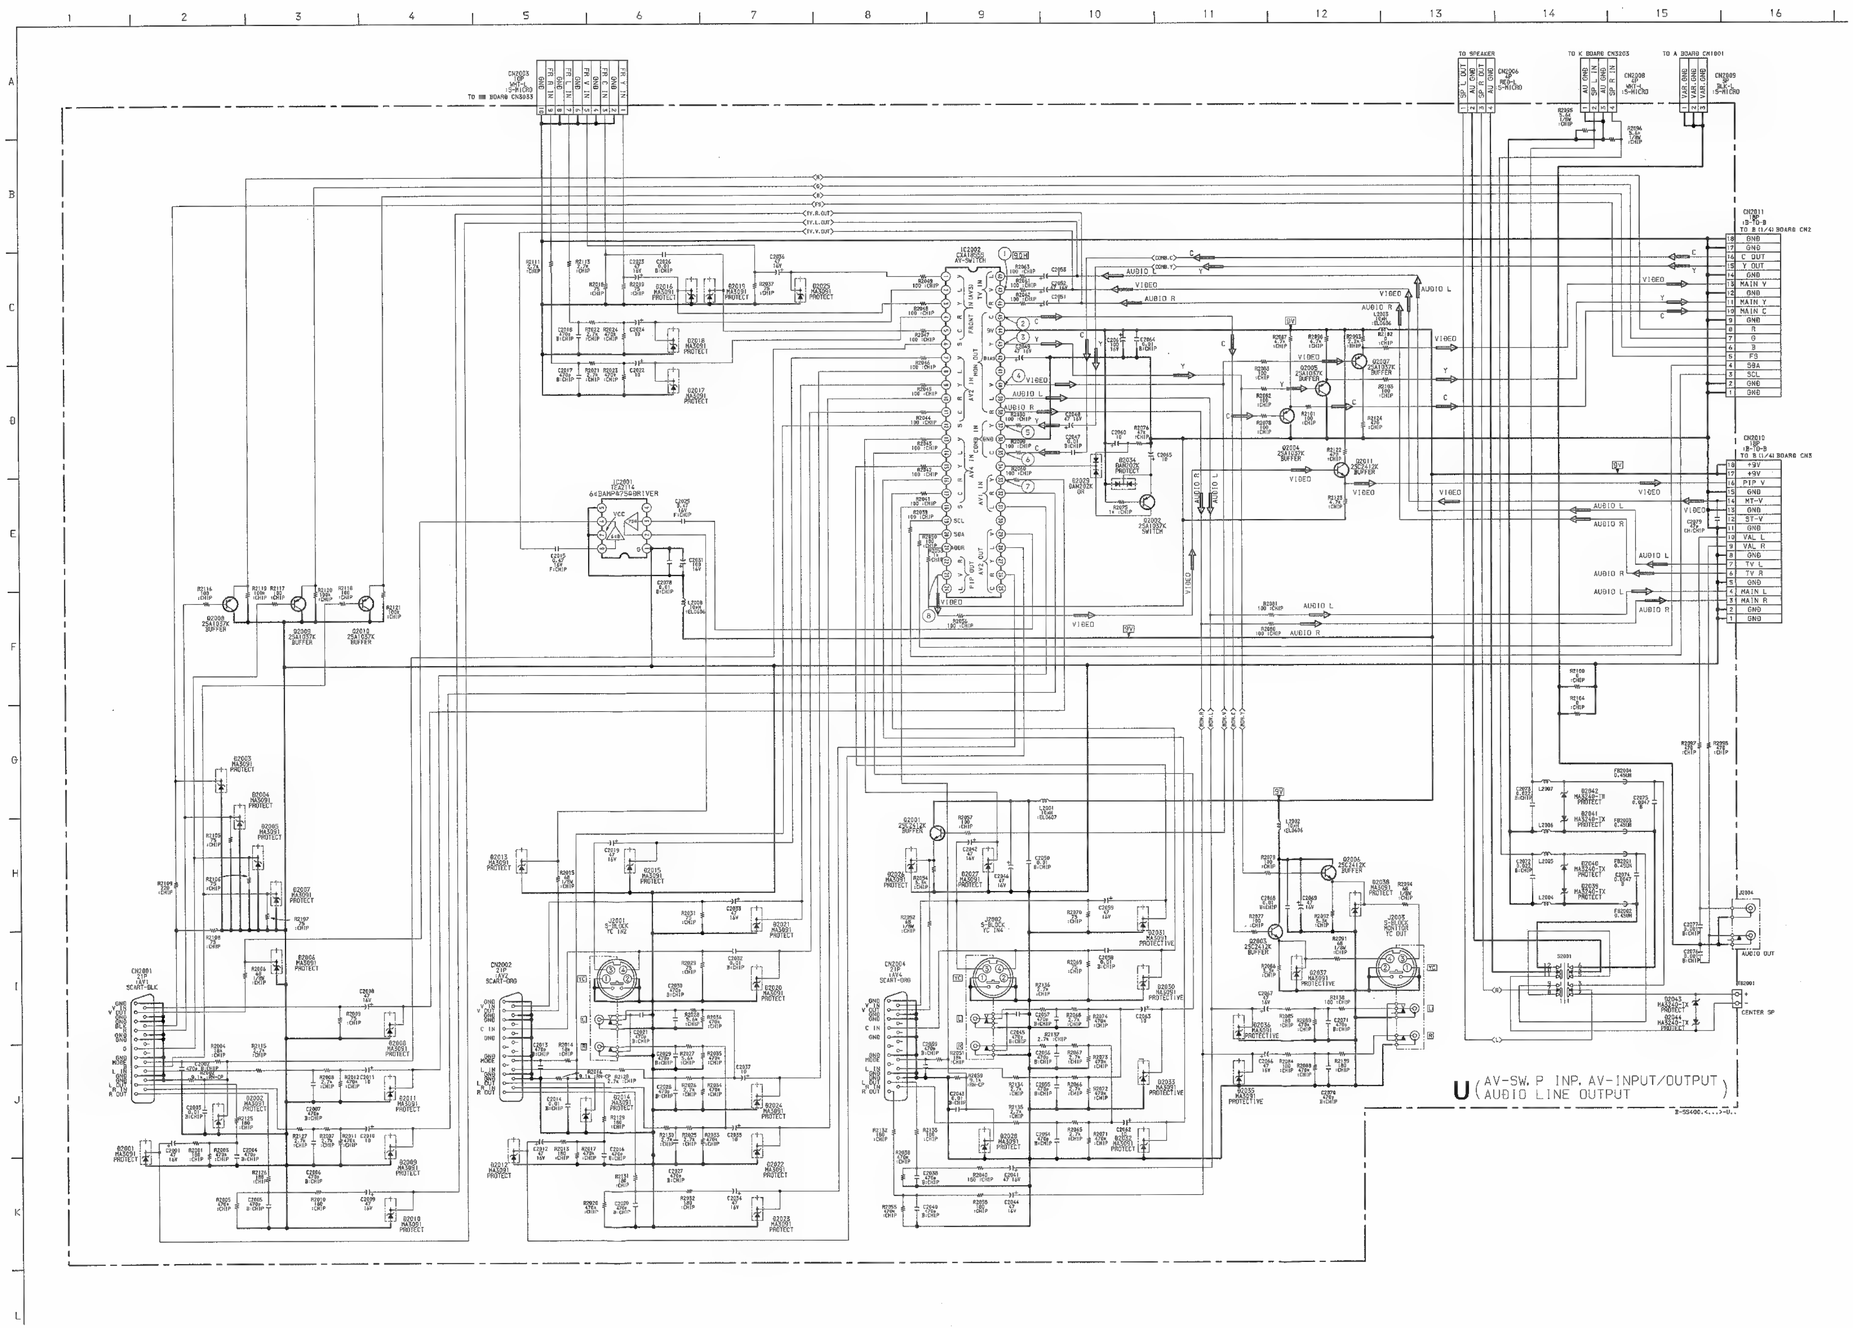

U BOARD IC VOLTAGE LIST

	Pin	Voltages
IC2001	1	GND
	2	2.0
	3	2.7
	8	8.8
	6	1.8
	7	8.8
	8	2.2
IC2002	1	4.5
	2	4.5
	3	4.5
	4	4.5
	5	4.5
	6	0
	7	4.5
	8	4.5
	9	4.5
	10	4.5
	11	4.5
	12	8
	13	4.5
	14	4.5
	15	4.5
	16	4.5
	17	4.5
	18	0
	19	4.8
	20	4.8
	21	0
	22	–
	23	4.5
	24	–
	25	–
	26	4.5
	27	–
	28	4.5
	29	4.5
	30	–
	31	4.5
	32	4.5
	33	4.5
	34	0.5
	36	4.5
	36	GND
	37	4.5
	38	4.5
	39	4.5
	40	4.5
	41	–
	42	4.5
	43	4.5
	44	8.8
	45	8.8
	46	8.8
	47	8.8
	48	8.8

All voltages are in V.
–: Blank Pin

U BOARD TRANSISTOR VOLTAGE LIST

	B	C	E
Q2001	4.4	8.8	3.8
Q2002	8.8	1.2	8.6
Q2003	4.5	8.8	3.9
Q2004	4.5	GND	5.1
Q2005	4.5	GND	5.1
Q2006	4.4	8.8	3.8
Q2007	4.4	0.8	5.0
Q2008	0	GND	0
Q2009	0	GND	0
Q2010	0	GND	0
Q2011	0	3.8	0

All voltages are in V.

• U BOARD WAVEFORMS

① 1.4Vp-p (H)

② 1.7Vp-p (H)

③ 2.5Vp-p (H)

④ 2.6Vp-p (H)

⑤ 2.6Vp-p (H)

⑥ 1.5Vp-p (H)

⑦ 2.6Vp-p (H)

⑧ 2.6Vp-p (H)

U BOARD : IC2002 CXA1855S

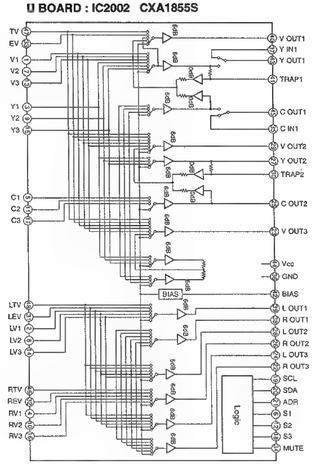

D BOARD TRANSISTORE VOLTAGE LIST

	B	C	E
Q5001	0	5.7	GND
Q5002	-3.2	-5.0	-2.6
Q5003	2.5	5.1	1.9
Q5004	0	5.0	GND
Q5101	0	3.5	GND
Q5102	0	3.3	GND
Q5401	0	4.8	GND
Q5411	0	5.7	GND

All voltages are in V.

D BOARD IC VOLTAGE LIST

	Pin	Voltages		Pin	Voltages		Pin	Voltages		Pin	Voltages		Pin	Voltages
IC5001	21	5.1		32	0		27	0		25	0		14	0.3
	24	5.0		33	5.0		28	0		26	6		15	1.8
	30	0		34	5.0		29	0		27	0		16	5.0
	31	0		35	0		30	-0.6		28	6	IC5601	1	20.8
	32	GND		36	0		31	5.0		29	0		2	20.8
	34	2.5		37	0		32	0		30	-0.6		3	20.8
	35	2.2		38	0		33	5.0		31	5.0		4	0
	36	6.1		39	0		34	5.0		32	6		5	0
	39	GND		40	0		35	0		33	5.0		6	-0.2
	40	GND		41	0		36	0		34	5.0		7	-0.2
	41	GND		42	GND		37	0		35	0		8	GND
	42	GND	IC5003	1	5.1		38	0		36	0		9	-0.2
	43	5.1		2	5.1		39	0		37	0		10	-0.2
	44	4.7		3	GND		40	0		38	0		11	22.2
	46	8	IC5004	1	0.8		41	0		39	0		12	-21.8
	47	5		2	1.1		42	GND		40	0		13	-21.8
	48	0		8	5.1	IC5006	1	0.8		41	0		14	22.2
	54	4.5		4	0		2	1.1		42	GND		15	22.4
	55	4.6		5	-1.0		3	5.1	IC5006	1	0.5		16	21.9
	58	0		8	0		4	0		2	0		17	21.9
	59	0		7	-0.6		5	-1.0		3	GND		18	22.4
	60	0		9	-5.0		6	0		4	5.1		19	-21.9
	61	GND		10	0.1		7	-0.9		5	0		20	-0.5
	62	GND		11	0.4		9	-5.0		6	0		21	-0.3
	63	5.1		12	-1.0		10	0.1		7	0		22	0
	64	5.1		13	0.3		11	0.4		8	0	IC5502	1	20.8
IC5002	1	0		14	1.2		12	-1.0		9	0		2	20.8
	2	-1.0		15	GND		13	0.3		10	0		3	20.8
	3	0		16	-1.2		14	1.2		11	-5.0		4	0
	4	-0.8		17	1.9		15	GND		12	GND		5	0
	5	0		18	-1.2		16	-1.2		13	0		6	-0.2
	6	-0.4	IC5005	1	0		17	1.9		14	0		7	-0.2
	7	0		2	-1.0		18	-1.2	IC5009	1	0.3		8	GND
	8	5.0		3	0	IC5007	1	0		2	0		9	-0.2
	9	-5.0		4	-0.8		2	-1.0		3	GND		10	-0.2
	10	5.0		5	0		3	0		4	5.0		11	22.2
	11	5.0		6	-0.4		4	-0.9		5	GND		12	-21.8
	12	0		7	5.0		5	0		6	0		13	-21.8
	13	5.0		8	5.0		6	-0.4		7	0		14	22.2
	14	-2.2		9	-5.0		7	-5.0		8	0		15	22.4
	15	0		10	5.0		8	5.0		9	0		16	21.9
	16	-0.9		11	5.0		9	-5.0		10	0		17	21.9
	17	0		12	0		10	5.0		11	-5.0		18	22.4
	18	-1.1		13	5.0		11	5.0		12	0		19	-21.9
	19	0		14	-2.2		12	0		13	0		20	-0.5
	20	-0.4		16	0		13	5.0		14	0		21	-0.3
	21	5.0		16	-0.8		14	-2.2	IC5101	1	GND		22	0
	22	0.3		17	0		16	0		2	0	IC5601	1	10.6
	23	0		18	-1.1		16	-0.9		3	5.0		G	GND
	24	0		18	8		17	0		4	3.4		O	5.1
	25	0		20	-0.4		18	-1.5		8	2.5	IC5602	I	11.1
	26	0		21	5.0		19	0		7	1.4		G	GND
	27	0		22	0		20	-0.4		8	GND		O	-5.0
	28	0		23	0		21	8.0		9	GND			
	29	0		24	0		22	0		10	3.4			
	30	-0.6		25	0		23	0		11	5.1			
	31	5.0		26	0		24	0		12	0.8			

All voltages are in V.

Pin numbers which are not described are not used.

D BOARD : IC5004, 5006 PA0053B

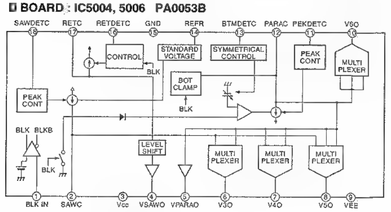

• D BOARD WAVEFORMS

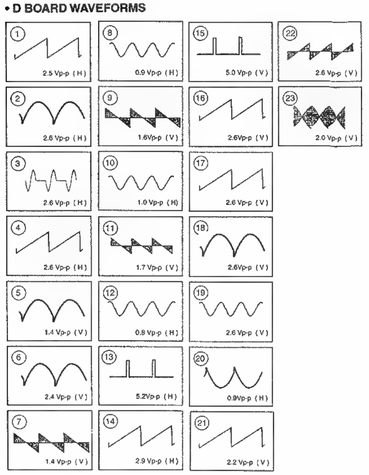

Schematic diagrams

← U board D board →

D [H/V SUB DEFLECTION]

– D BOARD –

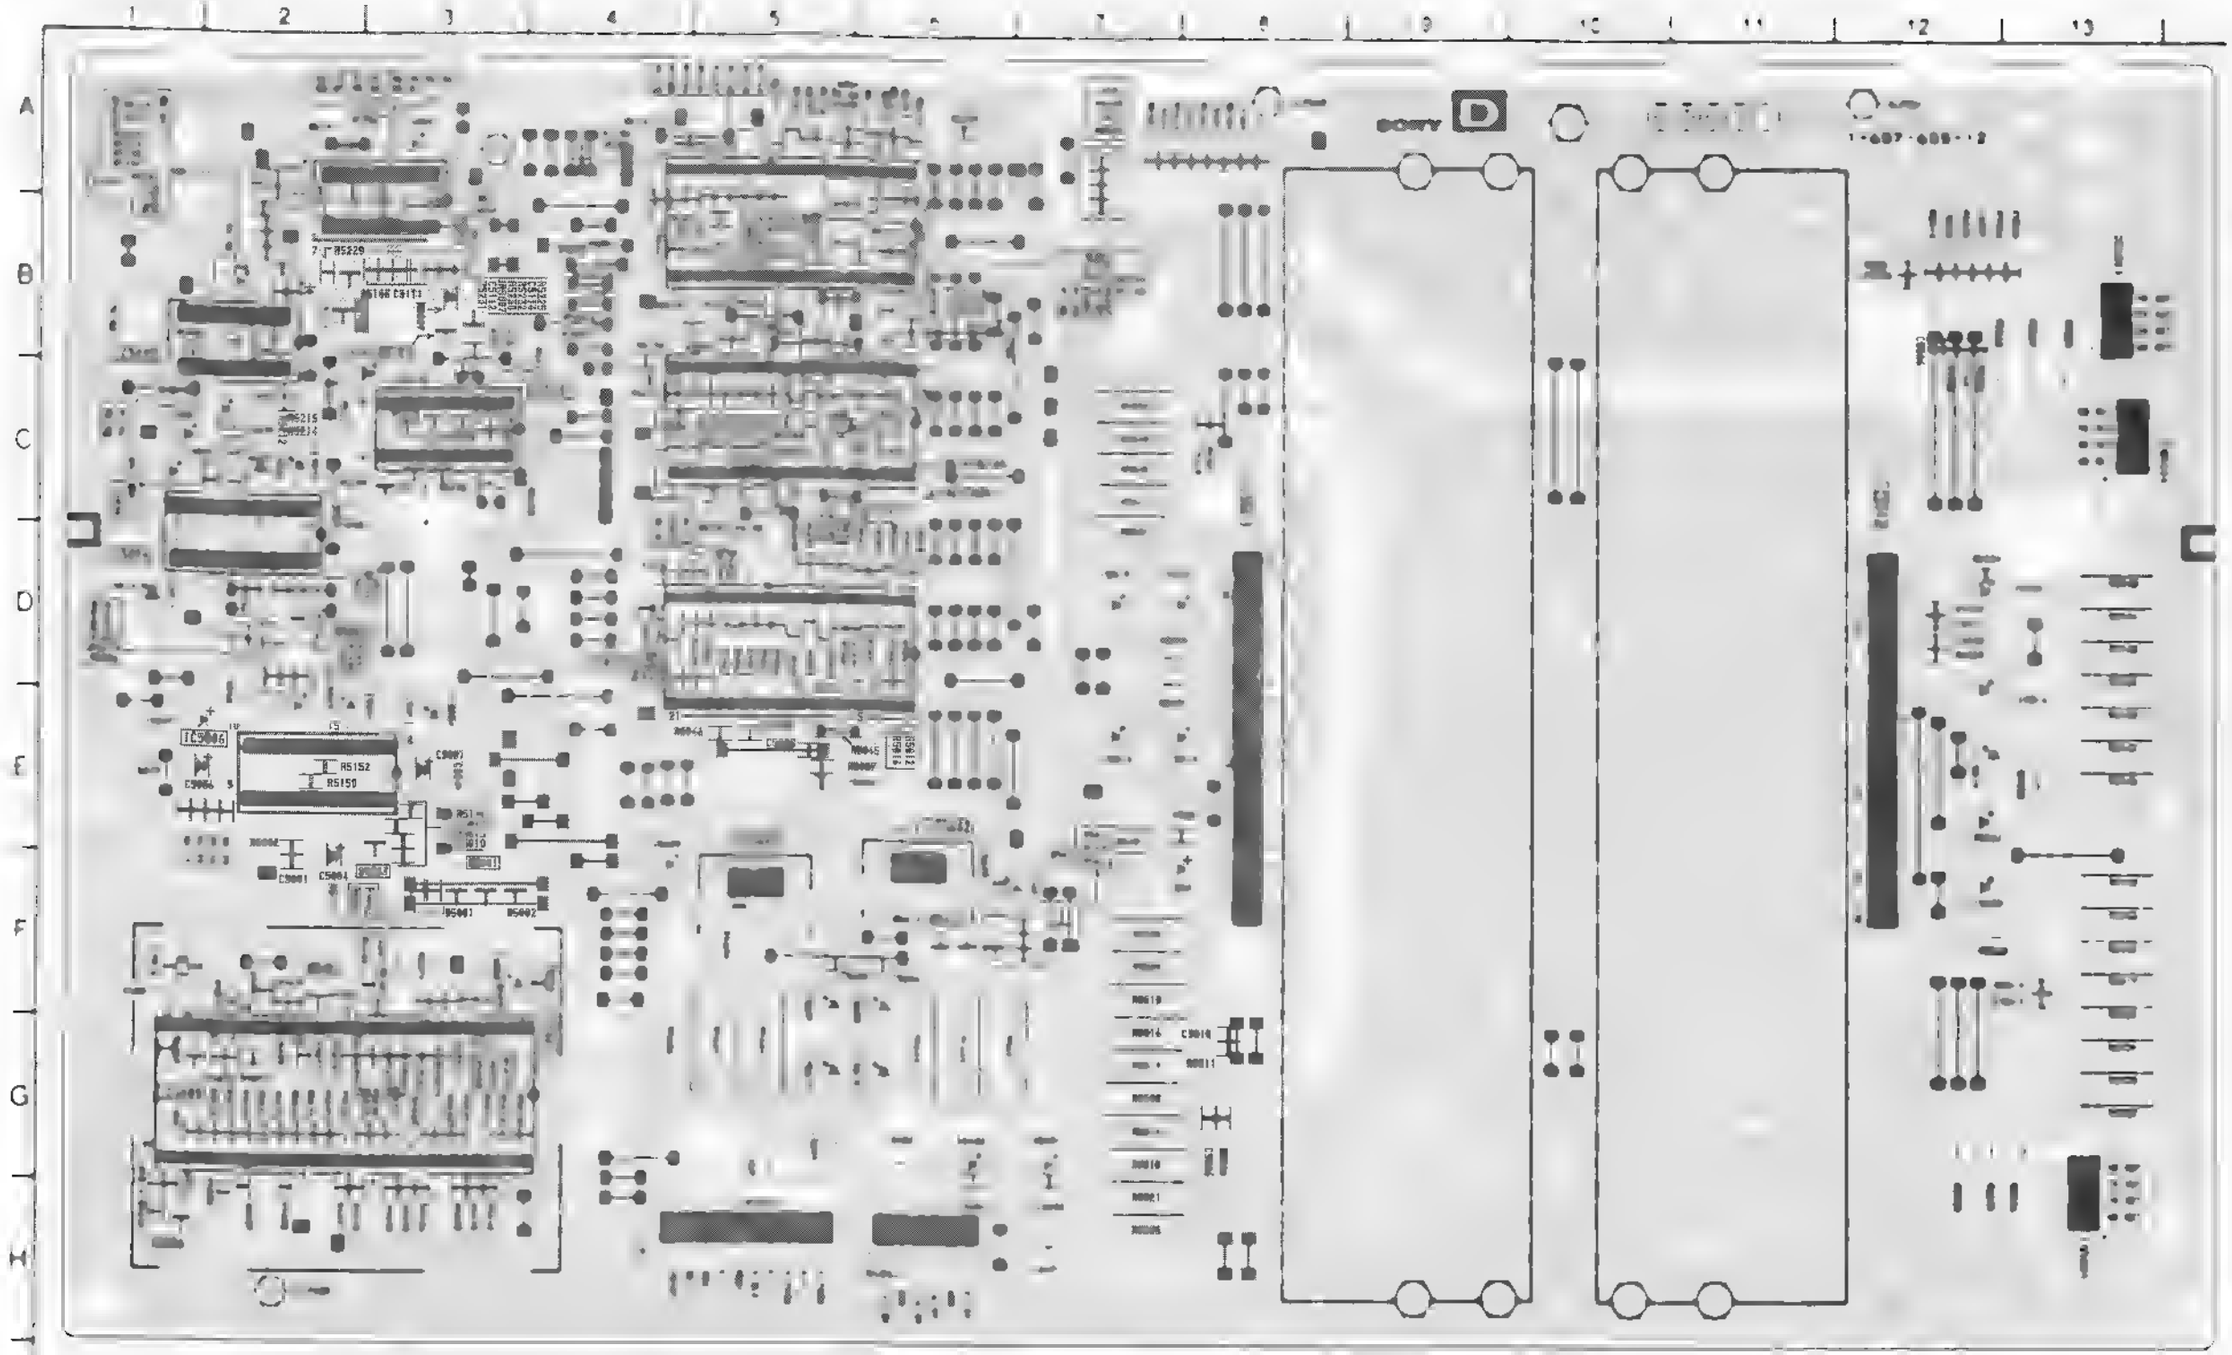

D BOARD

G BOARD

	F-9
	B-4
C	
	B-1
	E-8
IC6003	G-8
TRANSISTOR	
Q6001	J-9
Q6002	I-8
Q6003	H-8
Q6004	H-5
Q6005	A-4
Q6008	F-9
Q6009	C-3
	E-5
	E-9
	B-3
	D-5
	B-7

– G BOARD –

G [POWER SUPPLY]

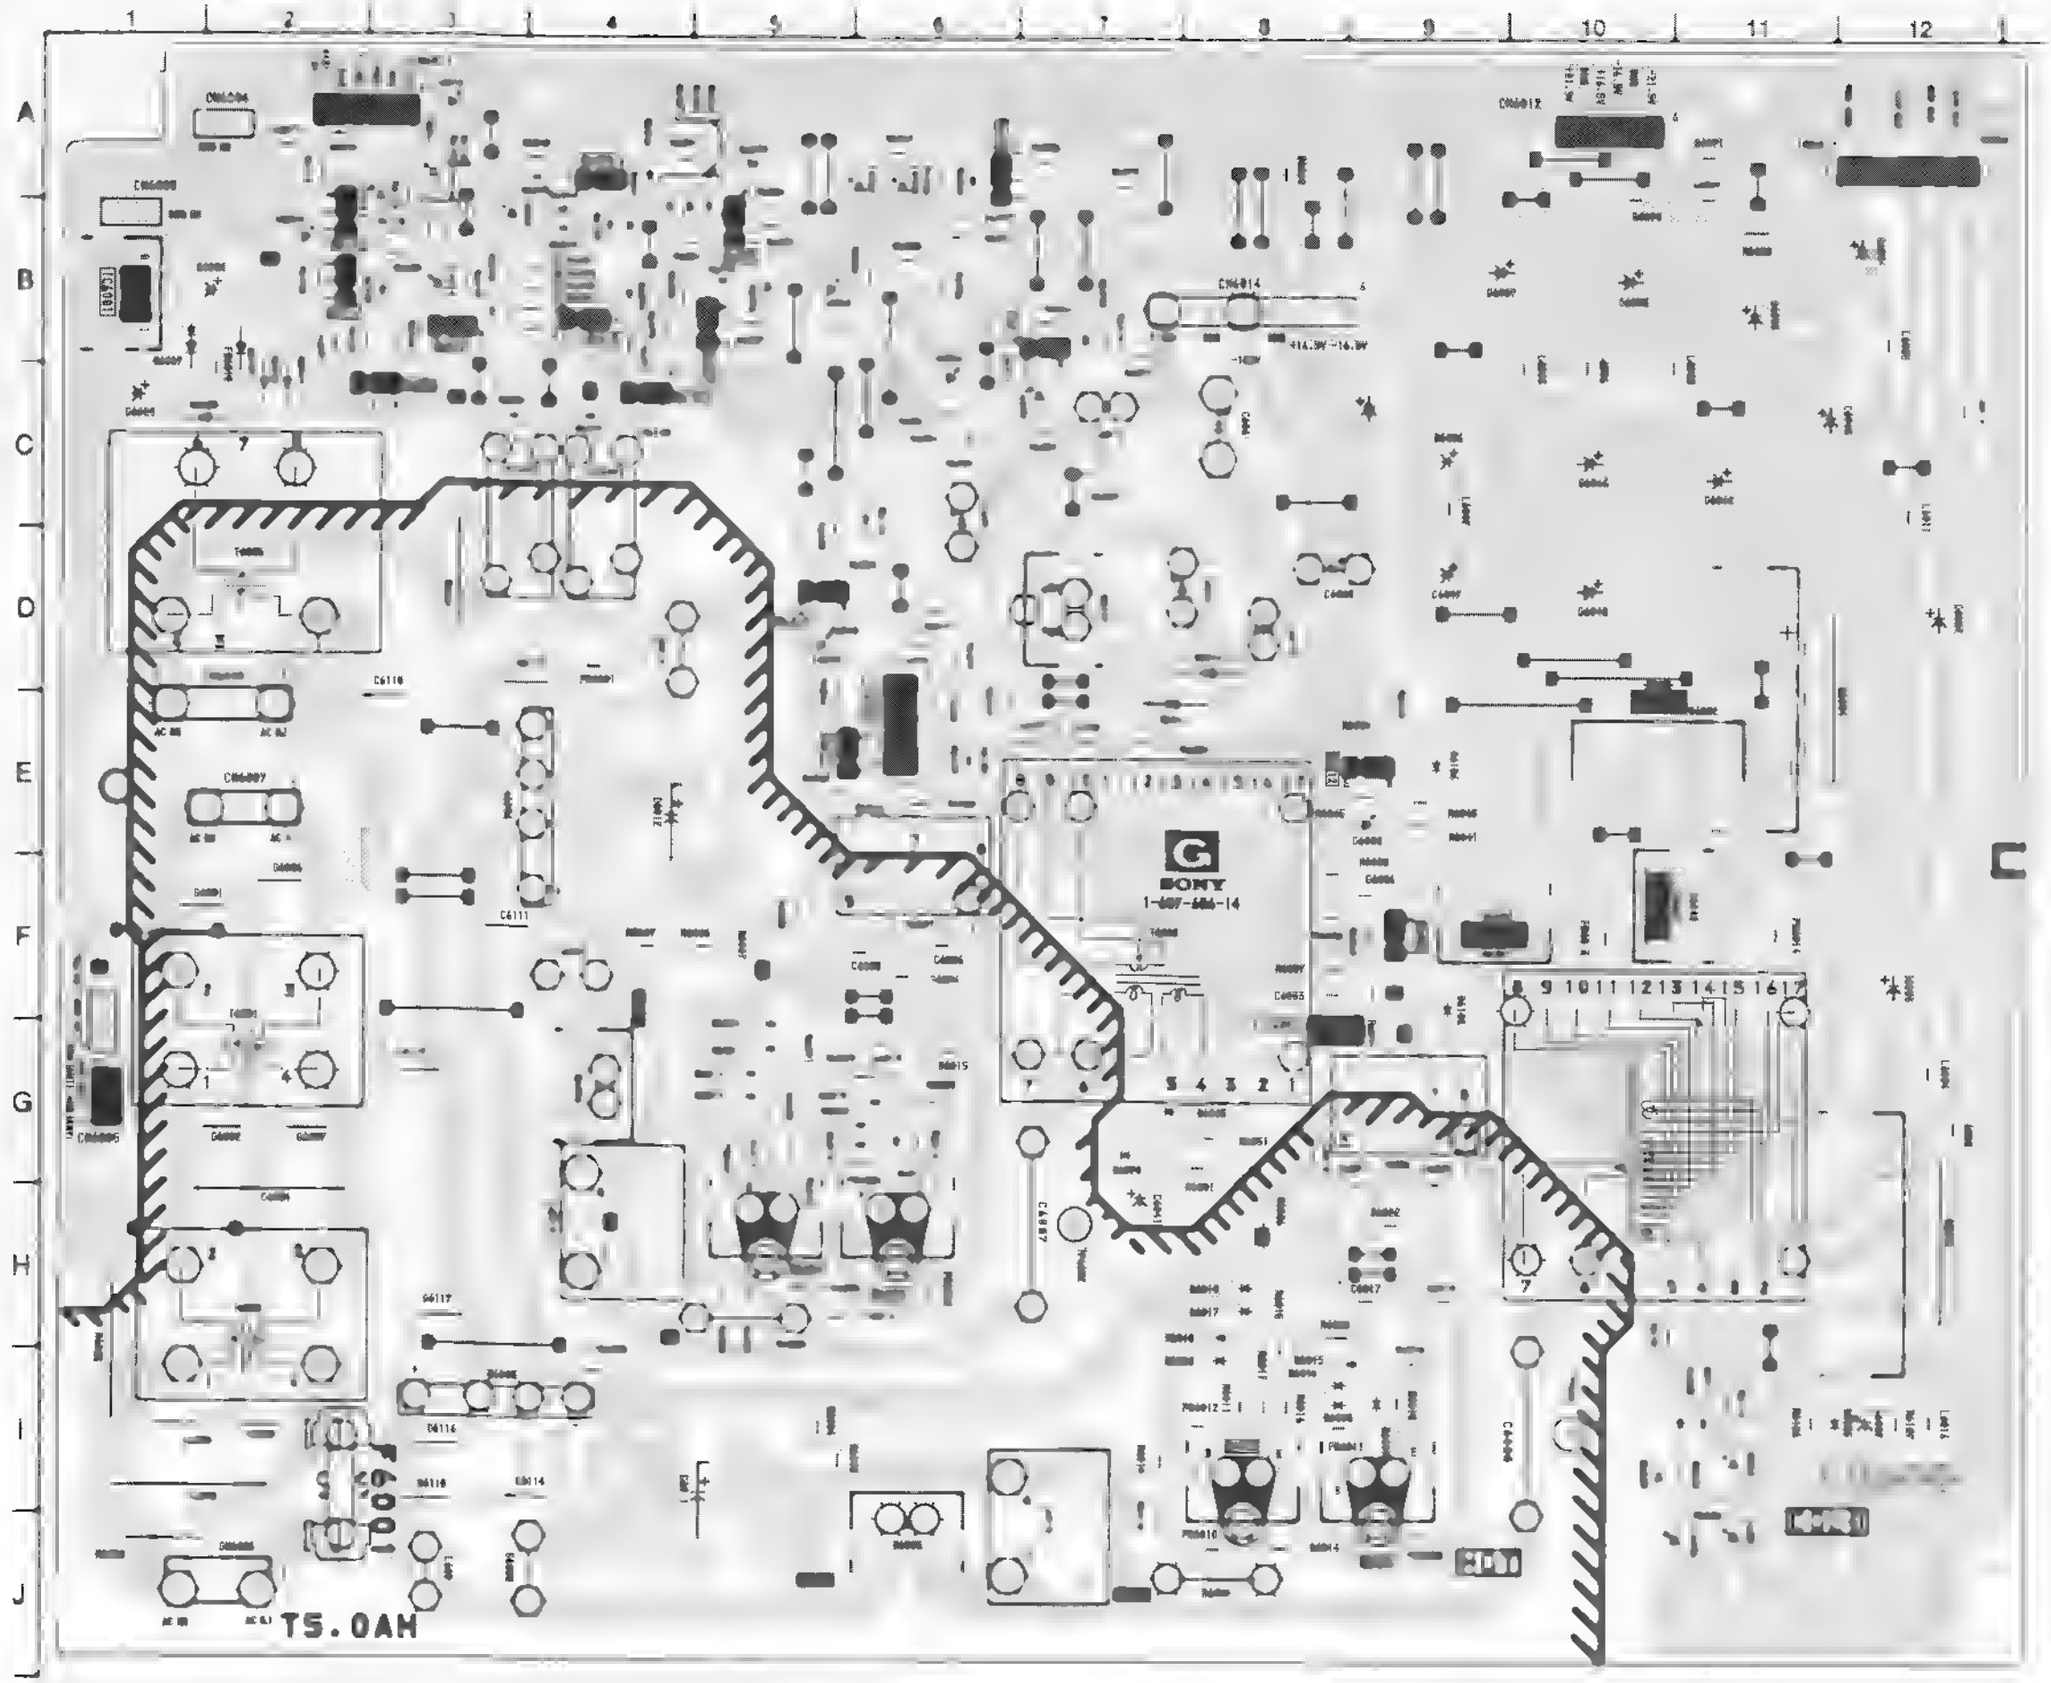

G (POWER SUPPLY)

G BOARD TRANSISTOR VOLTAGE LIST

	B	C	E
Q6001	-2.0	144.8	0
Q6002	143.1	284.8	145.5
Q6003	-1.6	141.5	0
Q6004	139	276.6	140.0
Q6005	0.2	0	GND
Q6006	15.9	GND	14.1
Q6009	0.7	2.5	GND
Q6011	14.8	GND	13.2
Q6012	0	16.1	GND
Q6013	0.8	0.1	GND
Q6014	0	15.0	GND
Q6015	134.8	0.2	135.2
Q6016	2.5	0.7	2.5
Q6018	16.2	16.9	16.9
Q6020	15.1	15.6	15.7
Q6021	16.9	0	16.9
Q6022	15.3	16.0	16.0
Q6101	11.1	11.8	11.8
Q6102	4.7	11.8	4.1

All voltages are in V.

G BOARD IC VOLTAGE LIST

	Pin	Voltages
IC6001	1	14.4
	2	GND
	3	11.8
IC6002	1	135.9
	2	–
	3	0.3
	4	0.3
	5	GND
IC6003	1	2.5
	2	GND
	3	14.3

All voltages are in V.
–: Blank Pin

G BOARD : IC6002 DM-48



Schematic diagrams
← G board A board →

• A BOARD WAVEFORMS

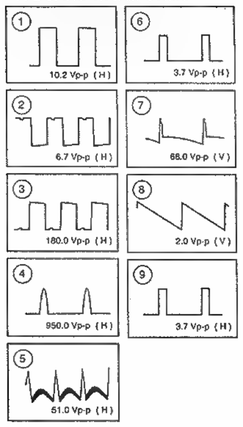

A BOARD TRANSISTORE VOLTAGE LIST

	B	C	E
Q1001	4.0	0	2.9
Q1002	0	0	GND
Q1003	4.0	GND	4.6
Q1005	4.6	0.8	4.9
Q1006	4.6	8.7	4.0
Q1401	0.7	0.1	GND
Q1402	12.3	2.4	12.3
Q1501	II	0	GND
Q1502	0.7	0.1	GND
Q1503	2.4	10.4	1.8
Q1504	3.9	GND	4.6
Q1505	9.8	2.3	10.4
Q1508	-2.9	86.3	GND
Q1509	2.3	GND	3.0
Q1510	0.3	GND	0.9
Q1511	1.5	12.3	0.9
Q1512	0	0.3	0
Q1513	2.9	-65.8	3.5
Q1514	0	12.3	0
Q1515	-122.7	1.1	-122.4
Q1516	3.0	-114.4	3.5
Q1517	-114.3	-137.1	-118.0
Q1518	-116.7	-137.1	-122.4
Q1519	12.3	0.8	12.3
Q1601	5.9	10.3	5.0

All voltages are in V.

A BOARD IC VOLTAGES LIST

	Pin	Voltages
IC1401	1	1.1
	2	16.8
	3	-16.8
	4	-17.2
	5	0.7
	6	16.2
	7	1.2
IC1601	1	8.3
	II	5.0
	3	GND
	4	8.3
IC1602	1	8.3
	2	5.0
	3	GND
	4	8.3
IC1603	I	-17.5
	G	GND
	O	-12.0
IC1604	1	15.6
	2	12.3
	3	GND
	4	15.6
IC1605	1	12.2
	2	9.0
	3	GND
	4	12.2
IC1606	I	9.0
	G	GND
	O	5.0

All voltages are in V.

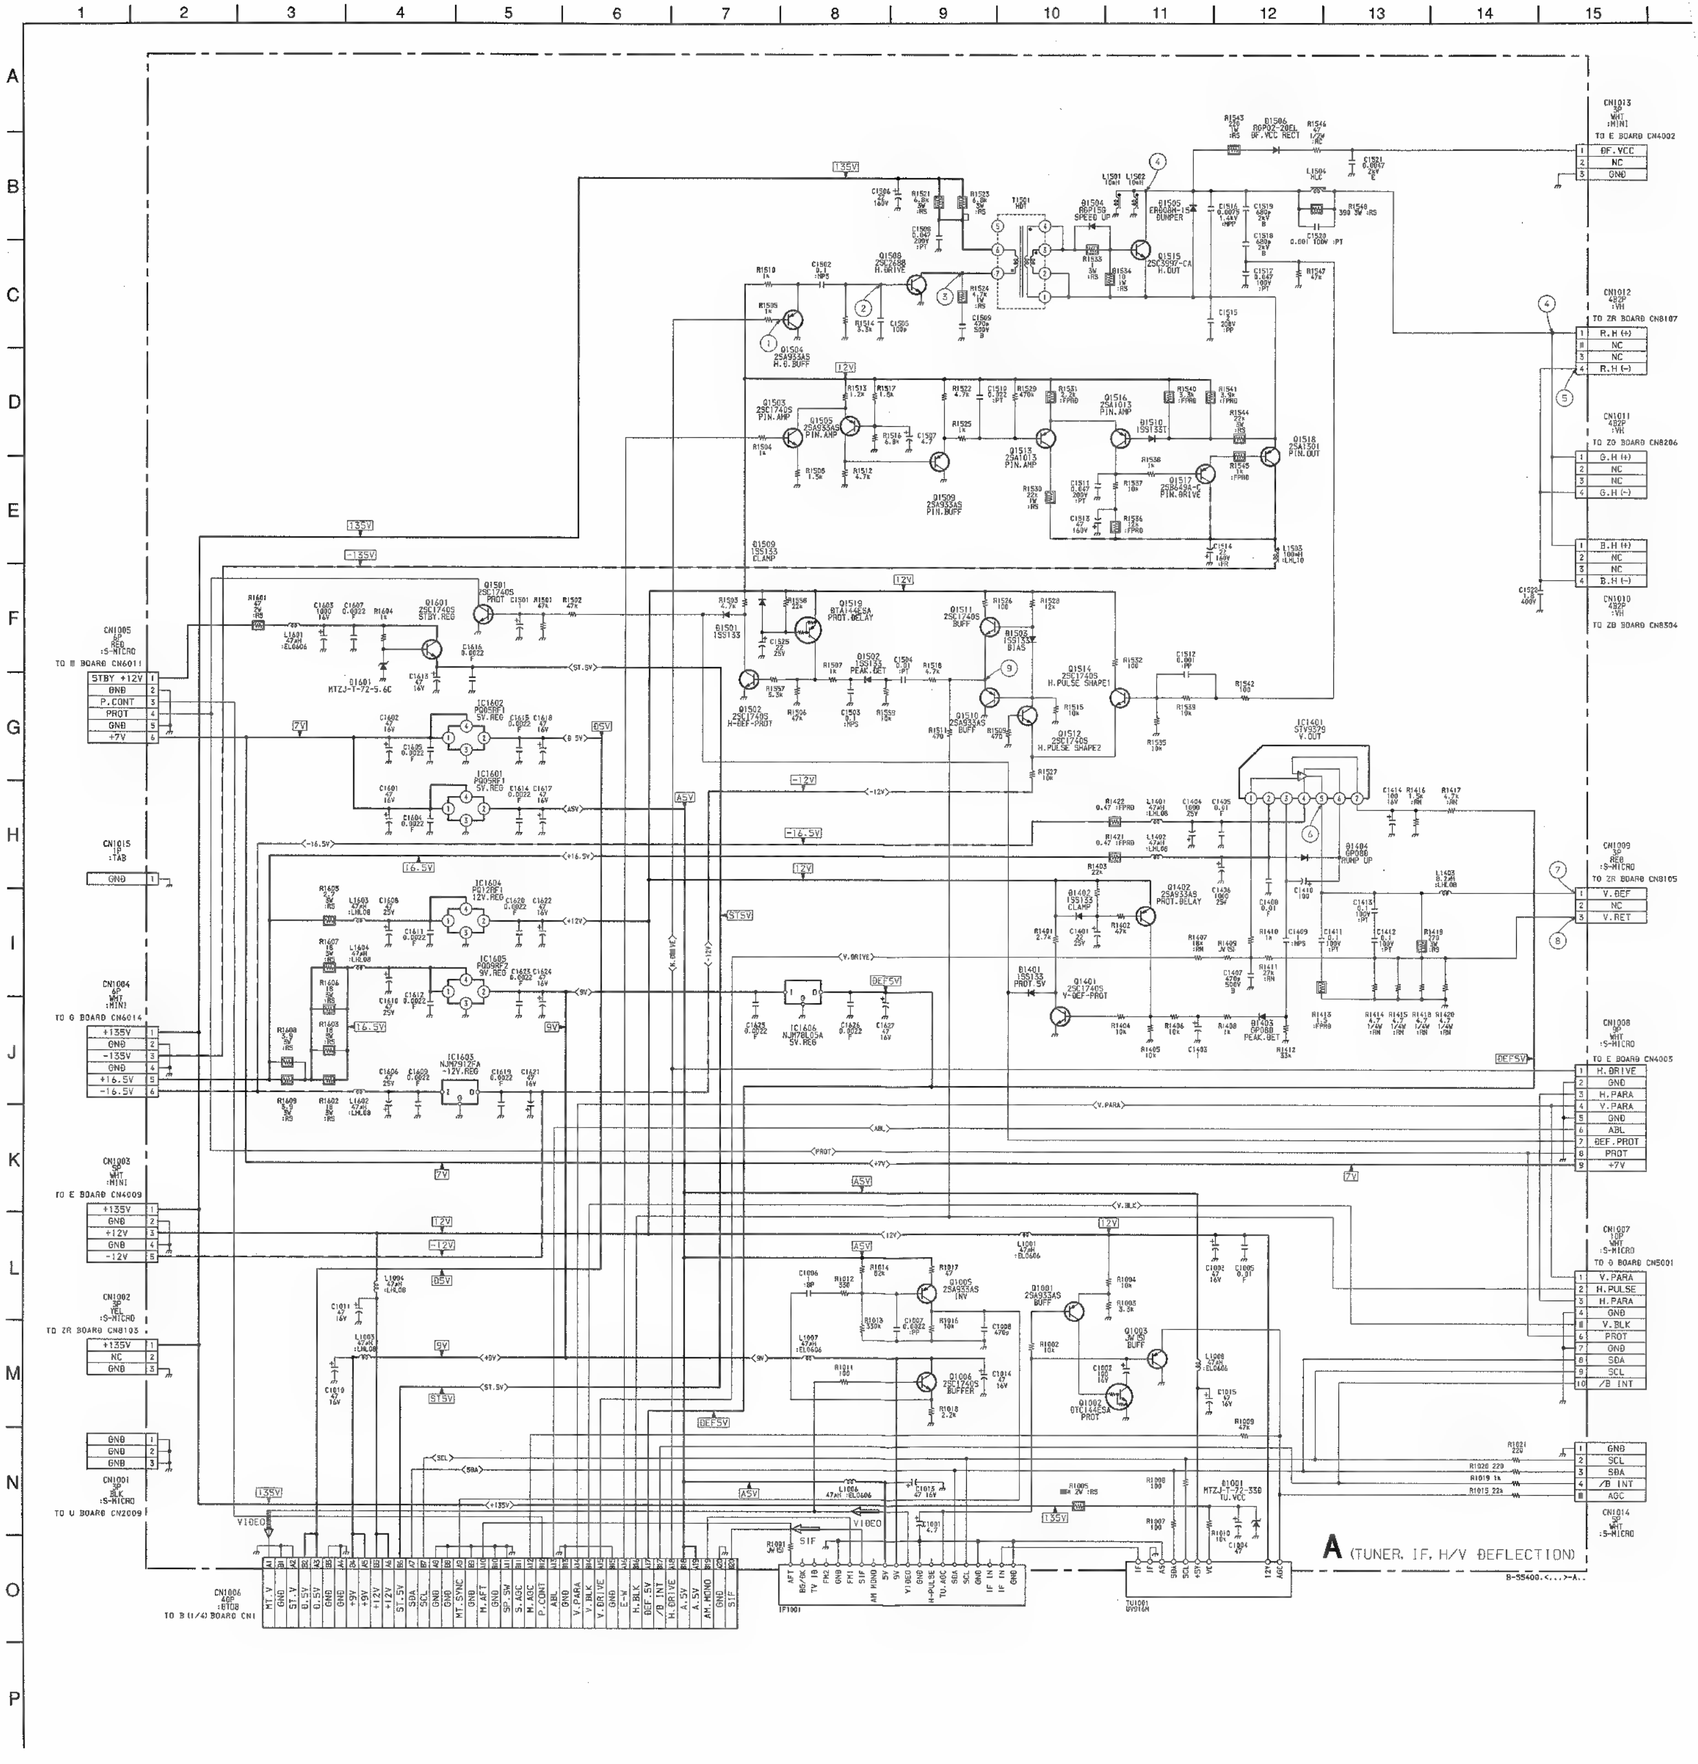

A [TUNER, IF, H/V DEFLECTION]

– A BOARD –

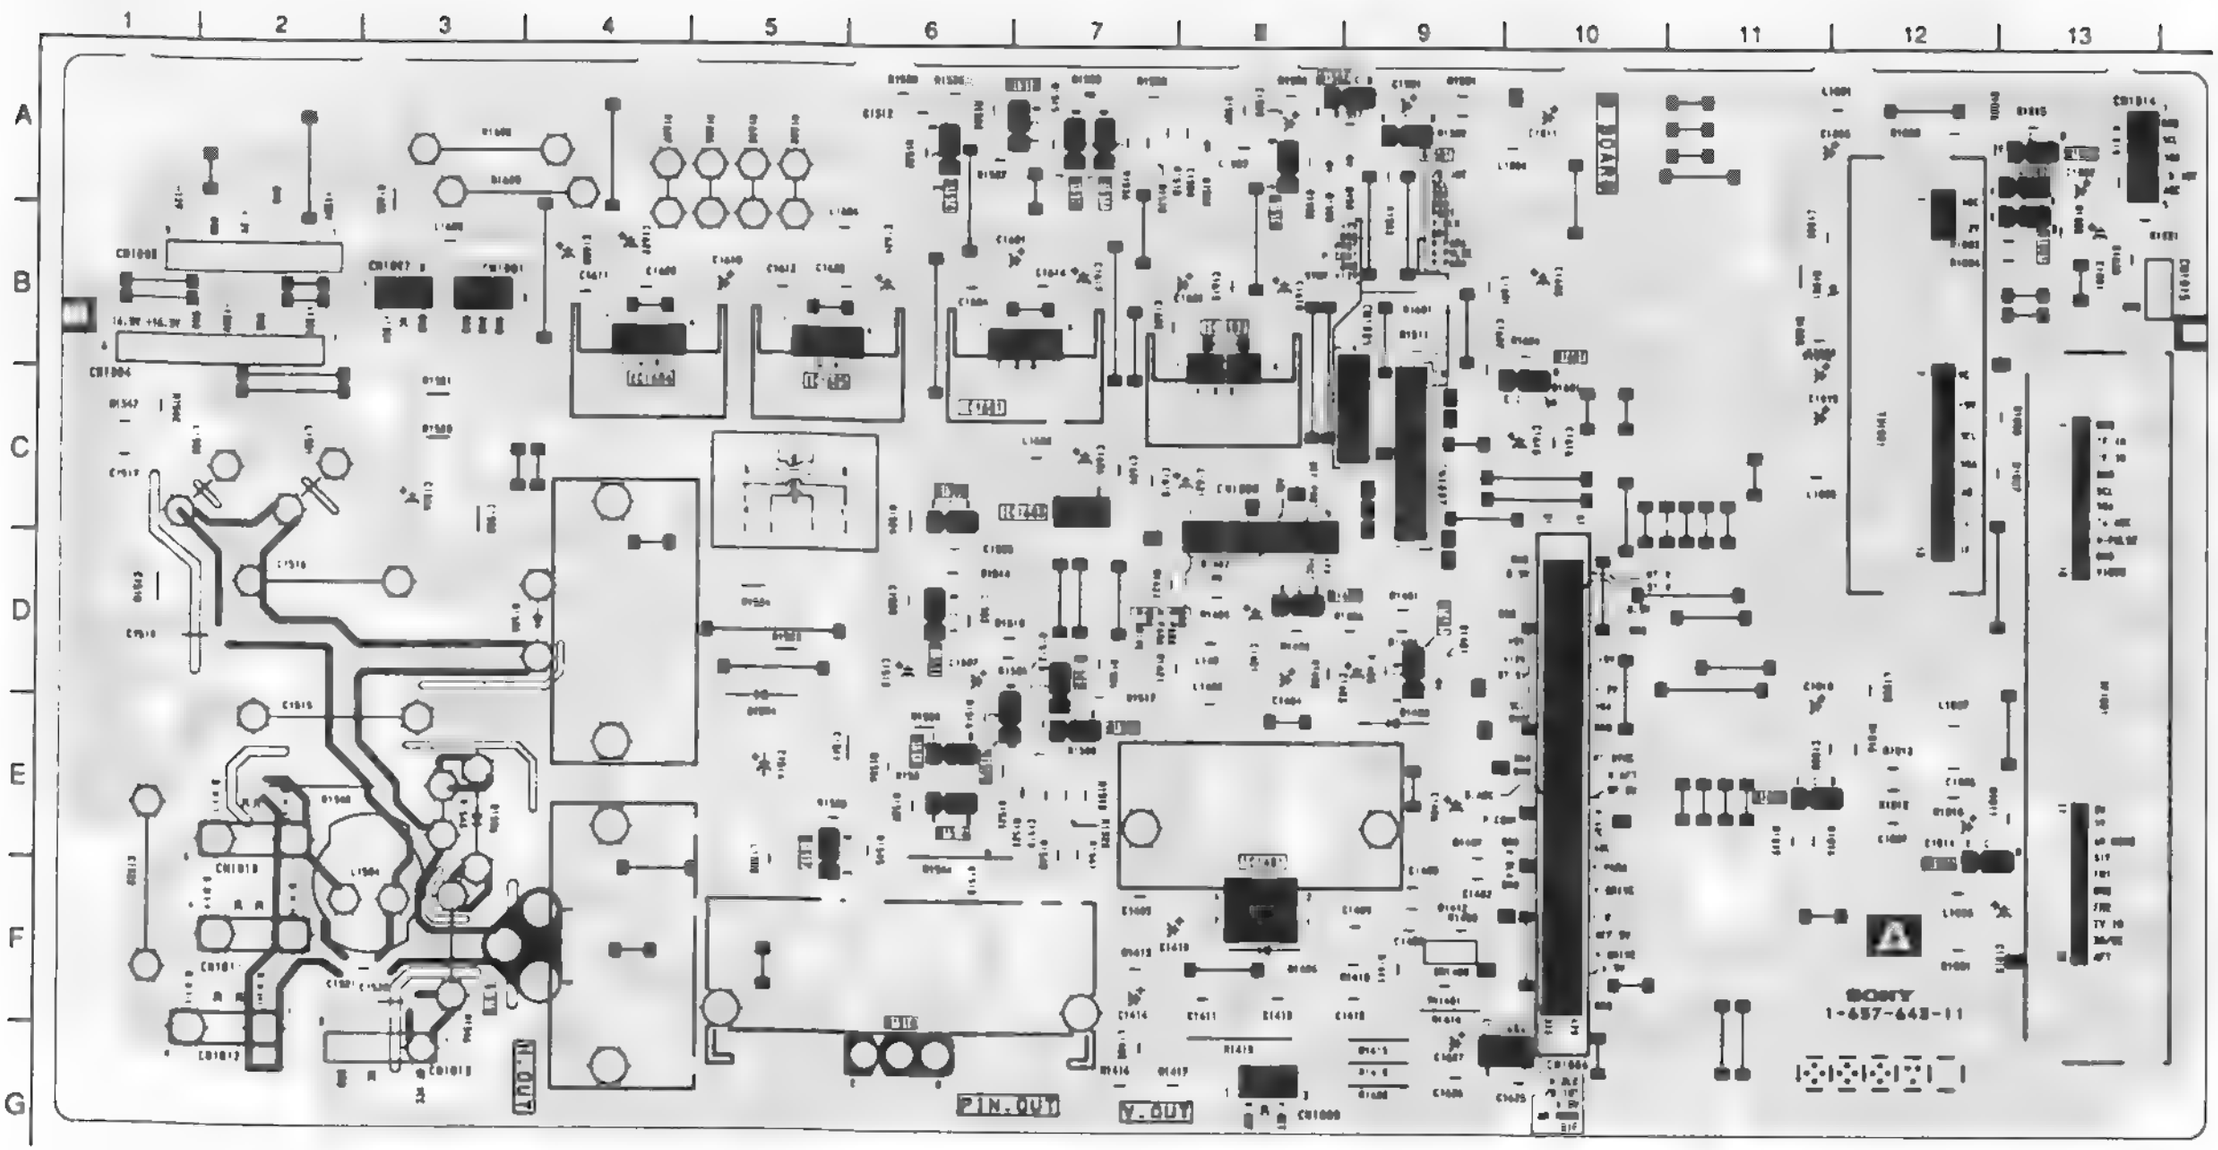

E [HV-REGULATOR, DYNAMIC FOCUS]

– E BOARD –

E BOARD

DIODE		*
D4001	F-6	④
D4002	F-6	⑥
D4003	B-5	⑥
D4004	C-2	⑥
D4005	C-2	④
D4006	F-10	–
D4007	D-10	–
D4008	D-10	–
D4009	F-7	–
D4010	F-7	–
D4011	C-5	–
D4012	B-2	⑨
D4013	E-5	④
D4014	C-3	⑥
D4017	D-1	⑥
D4018	B-2	⑥
D4020	B-4	④
D4021	A-3	⑨
D4023	B-2	④
D4025	B-4	④
D4026	B-3	⑨
D4027	C-2	⑨
D4028	A-2	④
D4029	A-2	⑨
D4030	A-4	⑥
D4031	B-1	④
D4032	A-3	⑥
D4033	B-2	⑥
D4034	B-2	④
D4035	A-3	–
D4036	B-1	④
D4037	D-3	⑤
D4039	D-3	⑤
D4040	D-3	⑤
D4041	G-7	④
D4042	G-7	④
D4043	C-4	⑨
D4044	B-1	–
D4501	E-1	⑨
D4502	E-1	⑨

IC	
IC4001	C-3
IC4002	B-3
IC4003	C-2
IC4004	B-2

TRANSISTOR		*
Q4001	F-6	–
Q4002	F-6	–
Q4003	E-6	–
Q4004	B-5	–
Q4005	F-9	–
Q4006	F-7	–
Q4007	D-4	①
Q4008	D-3	–
Q4009	D-3	–
Q4010	D-2	–
Q4011	B-4	①
Q4012	B-4	①
Q4013	C-1	①
Q4014	A-2	①
Q4015	A-4	①
Q4016	A-1	①
Q4017	C-4	①
Q4018	E-3	①
Q4019	C-4	①
Q4020	A-1	①
Q4021	B-1	①
Q4501	E-1	–
Q4502	F-3	①
Q4503	E-1	①
Q4505	E-3	①
Q4506	E-2	–

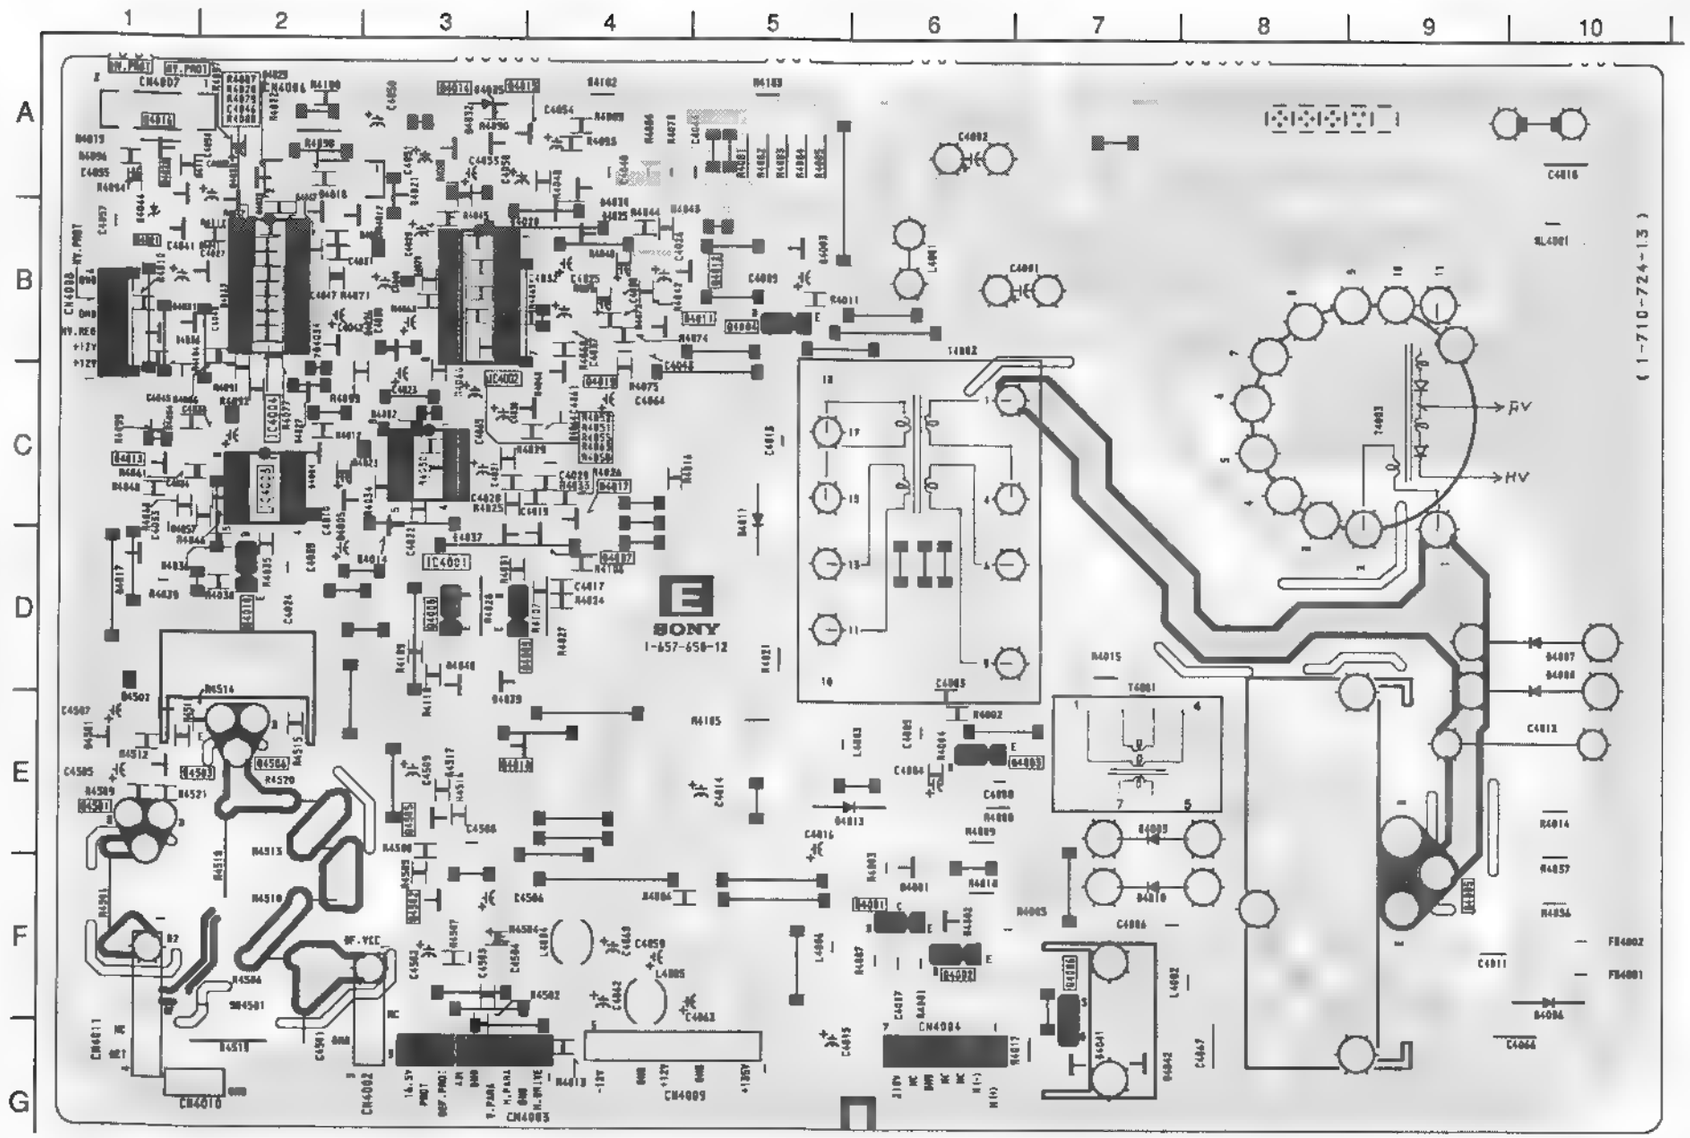

NOTE:
The circuit indicated as left contains high voltage of over 600 Vp-p. Care must be paid to prevent an electric shock in inspection or repairing.

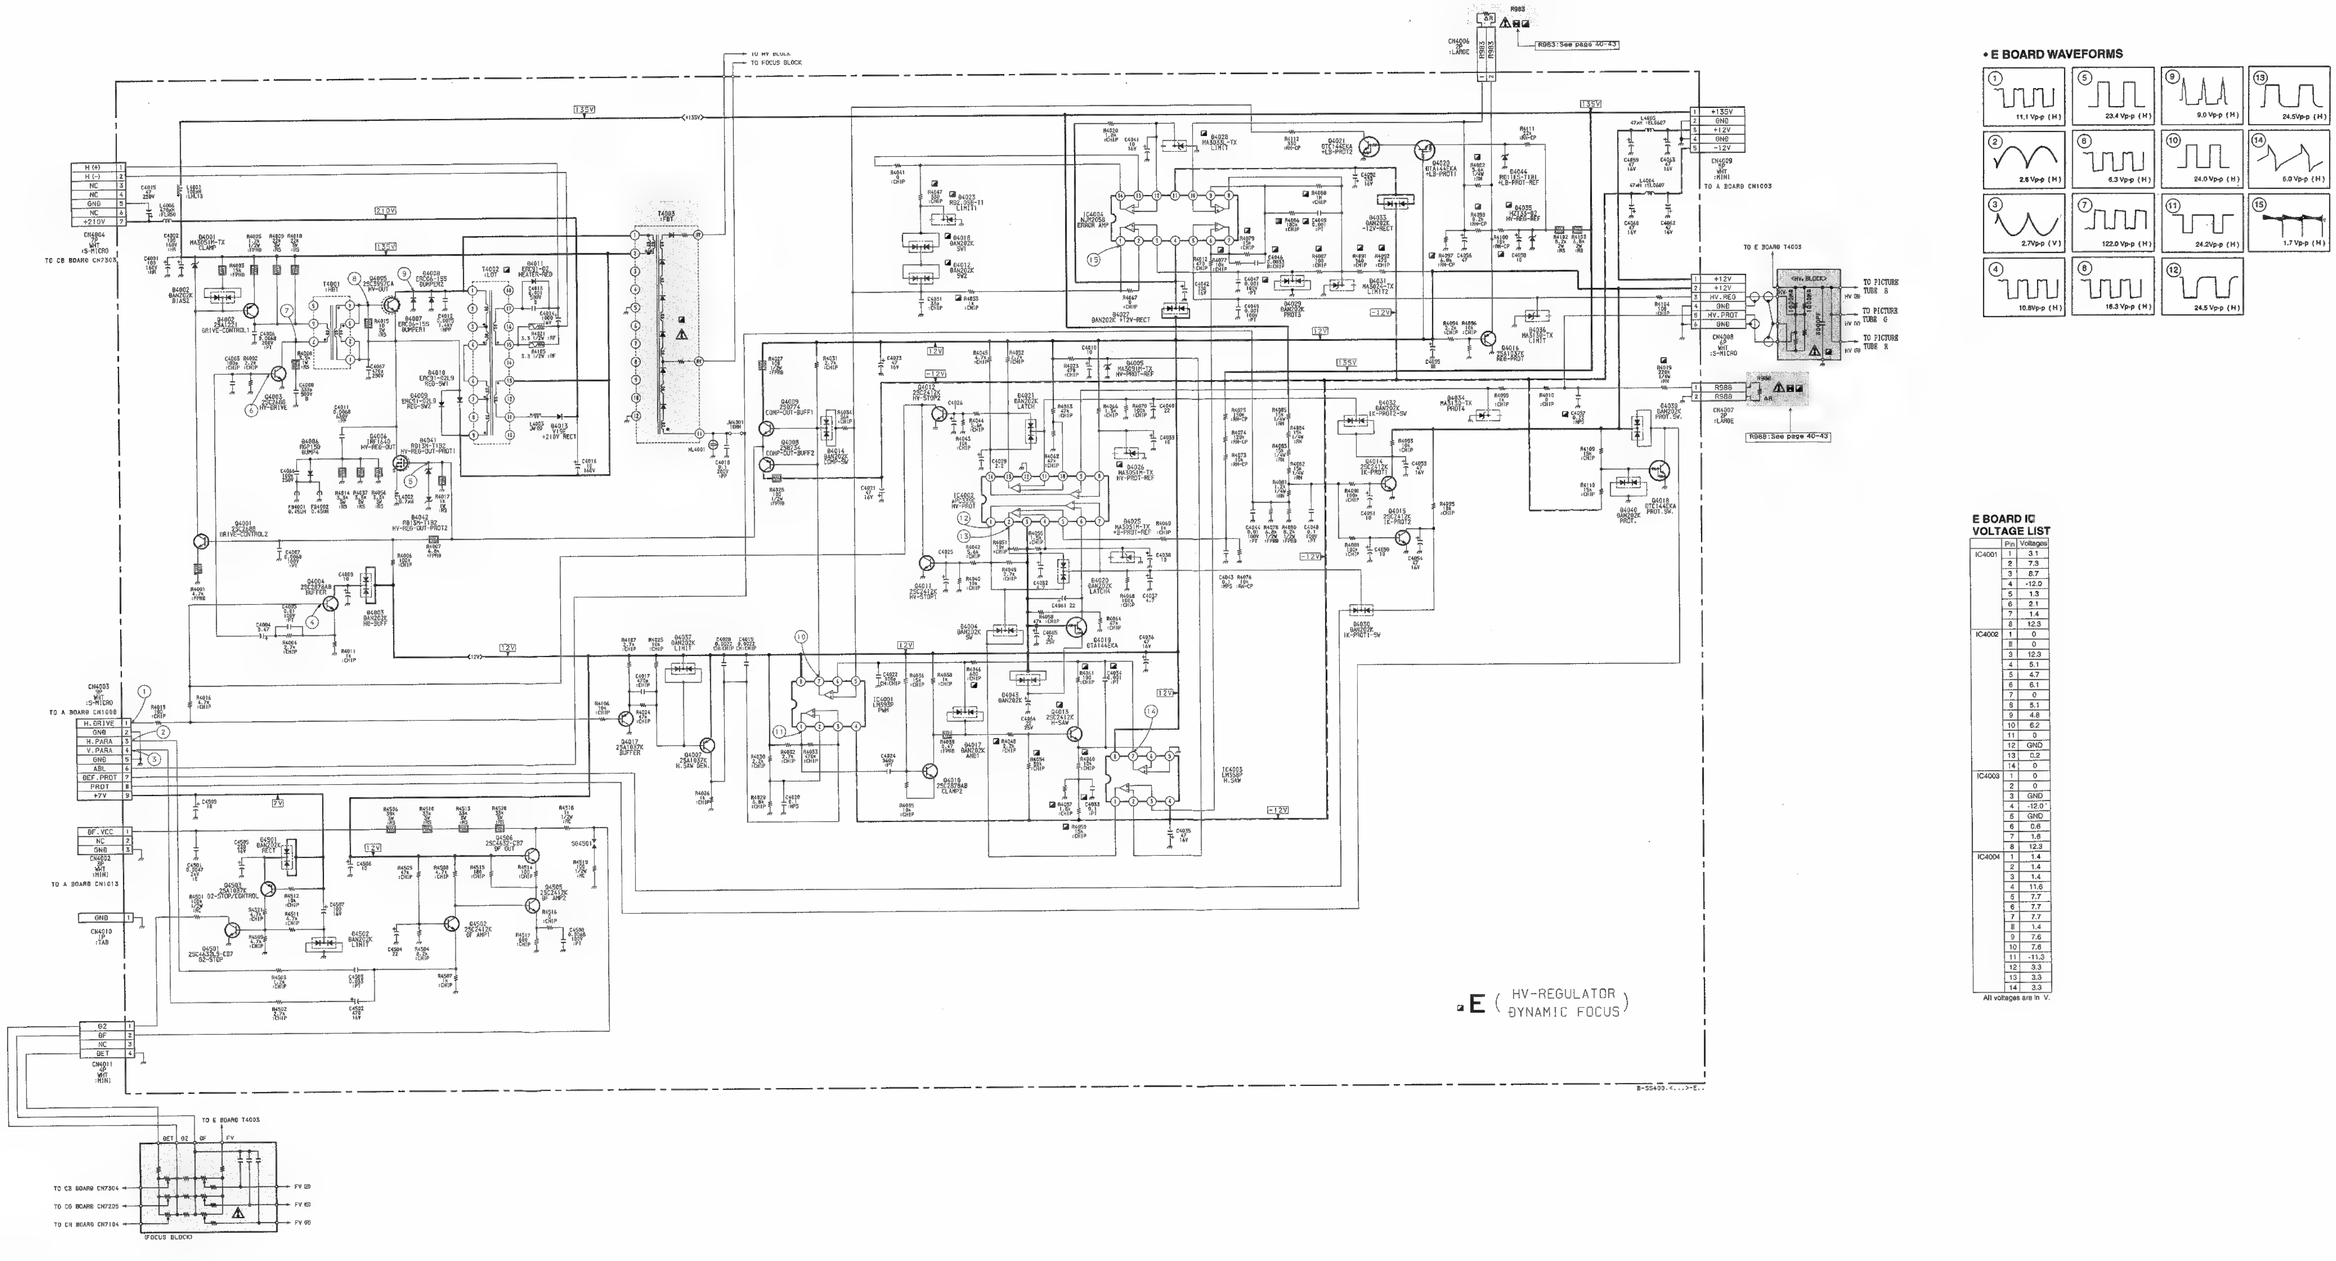

• E BOARD WAVEFORMS

E BOARD IC VOLTAGE LIST

	Pin	Voltage
IC4001	1	3.1
	2	7.3
	3	8.7
	4	-12.0
	5	1.3
	6	2.1
	7	1.4
	8	12.3
IC4002	1	0
	8	0
	3	12.3
	4	5.1
	5	4.7
	6	6.1
	7	0
	8	5.1
	9	4.8
	10	6.2
	11	0
	12	GND
	13	0.2
	14	0
IC4003	1	0
	2	0
	3	GND
	4	-12.0
	5	GND
	6	0.6
	7	1.8
	8	12.3
IC4004	1	1.4
	2	1.4
	3	1.4
	4	11.6
	5	7.7
	6	7.7
	7	7.7
	8	1.4
	9	7.6
	10	7.6
	11	-11.3
	12	3.3
	13	3.3
	14	3.3

All voltages are in V.



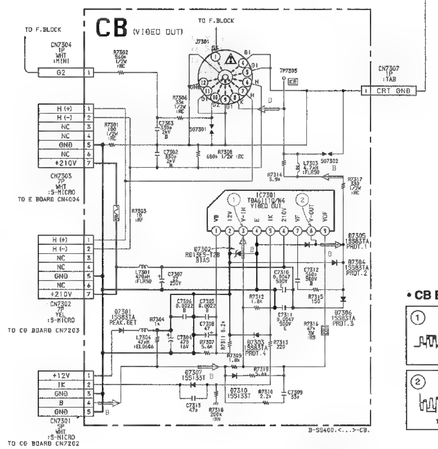

• CB BOARD WAVEFORMS



CB BOARD IC VOLTAGE LIST

	Pin	Voltages
IC7301	1	4.5
	2	11.2
	3	4.1
	4	GND
	5	9.6
	6	210.3
	7	178.6
	8	178.9
	9	177.5

All voltages are in V.



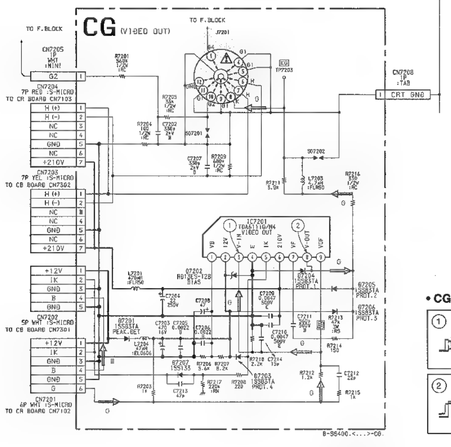

• CG BOARD WAVEFORMS



CG BOARD IC VOLTAGE LIST

	Pin	Voltages
IC7201	1	4.5
	2	11.2
	3	4.1
	4	GND
	5	9.6
	6	210.3
	7	178.6
	8	178.9
	9	177.5

All voltages are in V.



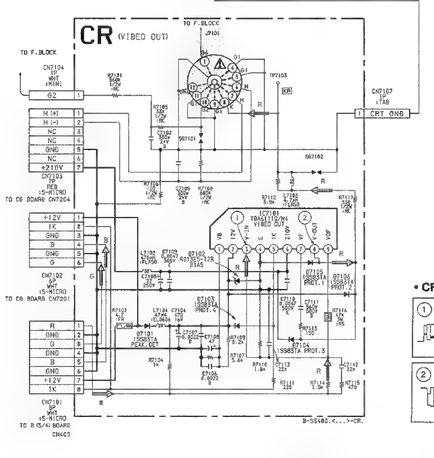

• CR BOARD WAVEFORMS



CR BOARD IC VOLTAGE LIST

	Pin	Voltages
IC7101	1	4.5
	2	11.2
	3	4.1
	4	GND
	5	9.6
	6	210.3
	7	178.6
	8	178.9
	9	177.5

All voltages are in V.

CB BOARD : IC7301 TDA6111Q/N4
CG BOARD : IC7201 TDA6111Q/N4
CR BOARD : IC7101 TDA6111Q/N4



CB [B OUT]

– CB BOARD –

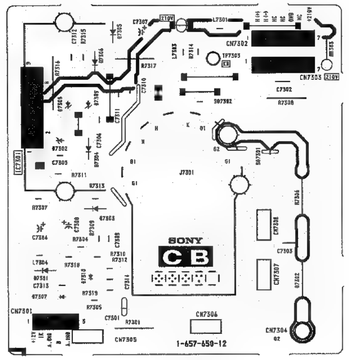

CG [G OUT]

– CG BOARD –

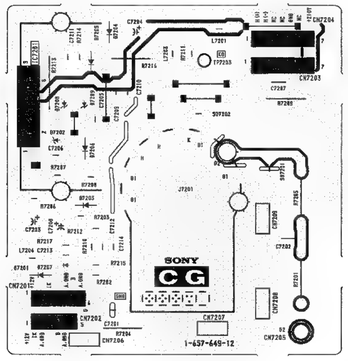

CR [R OUT]

– CR BOARD –

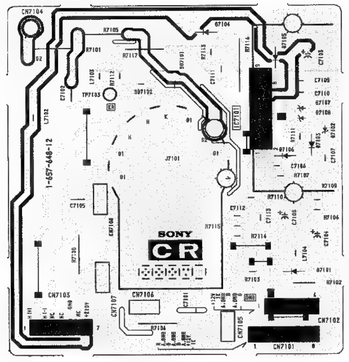

6-5. SEMICONDUCTORS

BA10358F
BA10393F
LM358D
LM393PS
NJM2234M
NJM2235M
NJM2240M
TDA2822D
TOP VIEW
8 pin

CXA1817S
TOP VIEW
30 pin

CXA1855S
TOP VIEW
48 pin

CXD2016Q
TOP VIEW
48 pin

CXD2024AQ
TOP VIEW
80 pin

CXP85460-039Q
CXP85460-047Q
TOP VIEW
64 pin

CXP85112B-613S
TOP VIEW
64 pin

CX20125
MARKING SIDE VIEW
8 pin

HD14053BFP
MC14053BF
TOP VIEW
16 pin

HEF4046BT-T
MC14046BDWR2
MC14053BCP
MC74HC163AF
MC74HC4053F
TC74HC123AP
TDA4665T-T
µPD4053BC
TOP VIEW
16 pin

LA7856A
PA0053B
TDA2579B
TOP VIEW
18 pin

LM358P
LM393P
NJM2058D
ST24C16CM1-TR/A
TEA2114
µPC358C
µPC393C
TOP VIEW
8 pin

MB81C1000A-70PJ-T5
INDEX
TOP VIEW

MC14066BF
MC74F08DR2
MC74HC74AF
TOP VIEW
14 pin

MN1382S
TOP VIEW

MSP3410
P83C652FBA/532
TOP VIEW
44 pin

L78L05ACZ
LM78L05ACZ

NJM78M12FA
NJM7905FA
PQ09RF2
TA7812S

NJM7905FA
NJM7912FA

PM0002B
TOP VIEW
42 pin

PQ05RF1

PQ12RF1
4 pin

SAA4940H-T
TOP VIEW

SAA4951WP/V1-T
TOP VIEW

SAA7158WP-T
TOP VIEW
68 pin

SDA9187-2XGEG
SDA9188-3XPGEG
TOP VIEW
28 pin

STK392-040
MARKING SIDE VIEW
22 pin

STV9379

TC4S66F
5 pin

TDA4650/V4
TDA4780/V3
TOP VIEW
28 pin

TDA6111Q/N4

TDA7265
MARKING SIDE VIEW
11 pin

TDA8755T-T
TOP VIEW
32 pin

TDA9141-N2C
TDA9160A
TOP VIEW
32 pin

TL431CLP

TMS4C2970-28DT
TOP VIEW
36 pin

TPU3040-TC20
TPU3041TC-22-TP

µPC339C
TOP VIEW
14 pin

µPC574J
ANODE
CATHODE

BF550

DTA144EKA-T146
DTC144EKA-T146
DTC323TK
2SA1037K-T-146-R
2SA1162G
2SC2412K-QR

6-5. SEMICONDUCTORS

BA10358F
BA10393F
LM358D
LM393PS
NJM2234M
NJM2235M
NJM2240M
TDA2822D



8 pin

CXA1817S

30 pin

CXA1855S



48 pin

CXD2018Q

48 pin

CXD2024AQ

80 pin

CXP85460-039Q
CXP85460-047Q



64 pin

CXP85112B-613S

64 pin

CX20125



8 pin

HD14053BFP
MC14053BF



16 pin

HEF4046BT-T
MC14046BDWR2
MC14053BCP
MC74HC163AF
MC74HC4053F
TC74HC123AP
TDA4665T-T
µPD4053BC

16 pin

LA7856A
PA0053B
TDA2579B

18 pin

LM358P
LM393P
NJM2058D
ST24C16CM1-TR/A
TEA2114
µPC358C
µPC393C

8 pin

MB81C1000A-70PJ-T5



MC14066BF
MC74F08DR2
MC74HC74AF



14 pin

MN1382S



MSP3410
P83C652FBA/532



44 pin

L78L05ACZ
LM78L05ACZ

NJM78M12FA
NJM7805FA
PQ09RF2
TA7812S

NJM7905FA
NJM7912FA

PM0002B

42 pin

PQ05RF1

PQ12RF1



4 pin

SAA4940H-T



SAA4951WP/V1-T



SAA7158WP-T



68 pin

SDA9187-2XGEG
SDA9188-3XPGEG



28 pin

STK392-040

22 pin

STV9379



TC4S66F



5 pin

TDA4650/V4
TDA4780/V3

28 pin

TDA6111Q/N4



TDA7265



11 pin

TDA8755T-T



32 pin

TDA9141-N2C
TDA9160A

32 pin

TL431CLP

TMS4C2970-28DT



36 pin

TPU3040-TC20
TPU3041TC-22-TP



µPC339C

14 pin

µPC574J



BF550



DTA144EKA-T146
DTC144EKA-T146
DTC323TK
2SA1037K-T-146-R
2SA1162G
2SC2412K-QR

DTA144ESA
DTC144ESA-TP
2SC1740S-R
2SC3622A-LK

IRFI640
2SA1837
2SC4793

2SA1013-O
2SA1208
2SA1208S-TP

2SA1048-YGR
2SA1175-HFE
2SC2785-HFE

2SA1221-L
2SA1221-T-M
2SB733-34
2SB734-T-4
2SD774-34

2SA1301-O

2SA933AS-QRT
2SC2878-AB

2SB649A
2SC2688-LK



2SC1740S-R

2SC3997CA



2SC4632LS-CB7



2SC4834P

BAS16
BBY40



DAN202K

DAP202K

D1NL20
EGP20G
GP08
GP08DPKG23
HZT33-02
MTZ-T-72-22A
MTZ-T-72-33D
RD2.0SB-T1
RGP02-20EL-6394
RGP15GPKG23
1SS83



D1N20R
MTZJ-11B
MTZJ-4.3B
MTZJ-5.6B
MTZJ-5.6C
MTZJ-T-72-13B
MTZJ-T-72-27B
MTZJ-T-72-3.3B
MTZJ-T-72-5.6B
MTZJ-T-72-7.5B
RD11ES-B1
RD13ES-B2
RD22ES-B1
RD27ES-B2
RD33ES-B2
RD39ES-B2
RD4.3ES-B2
RD5.6ES-B2
1SS119-25TG
1SS133
11ES2



D10SC4MR

D10SC4M
D8LC40



D6SB60L-K
RBA-406B



D2L40F
D2L40-TA



D5L60

ERC06-15S
ERC91-02
S2LA20F



ERC38-06
V19E



ERD08M-15

MA3024-TX
MA3033-L
MA3047-TX
MA3051M
MA3056M
MA3075M-TX
MA3091
MA3130
RD13M-B2
RD4.7M-B2
RD5.1M-B2
RD5.6M-B2
RD7.5M-B2

MA3091M-TX

MA3240-TX



SC802-06

TLR124

7-1. COVER (KP-46S4/46S4K/46S4U)

● : 7-685-648-79 +BVTP 3X12

■ : 7-685-663-79 +BVTP 4X16

sont critiques pour la securite.
Ne les remplacer que par une
piece portant le numero specifie.

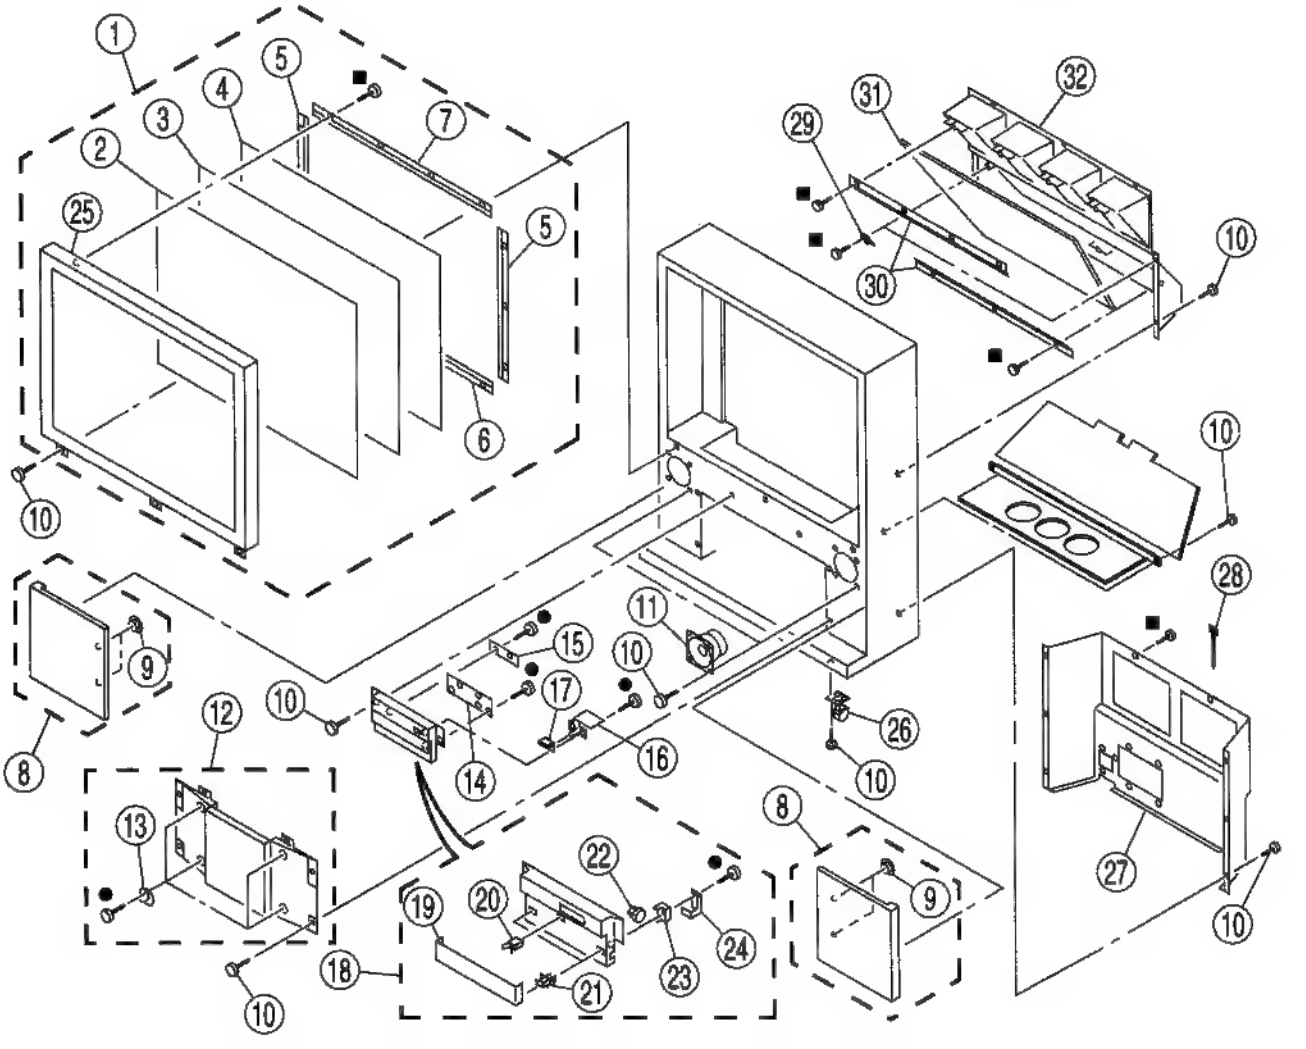

7-2. COVER (KP-53S4/53S4K/53S4U)

● : 7-685-648-79 +BVTP 3X12
■ : 7-685-663-79 +BVTP 4X16
▼ : 7-685-248-14 +KTP 3X12

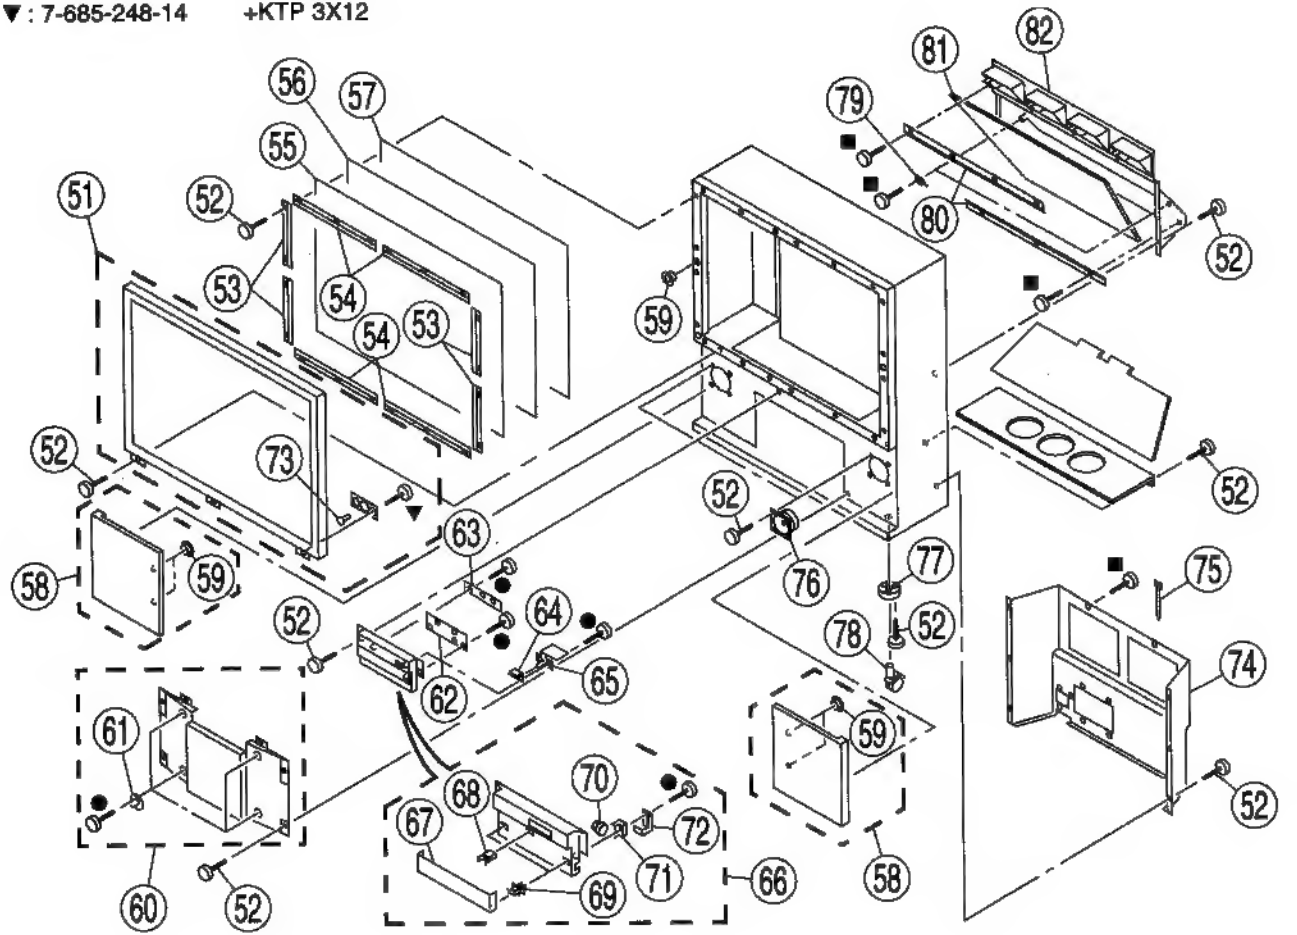

7-3. CHASSIS

● : 7-685-648-79 +BVTP 3X12
■ : 7-685-663-79 +BVTP 4X16

The componants identified by shading and mark ! are critical for safety.
Replace only with part number specified.

Les composants identifies par une trame et une marque ! sont critiques pour la securite.
Ne les remplacer que par une piece portant le numero specifie.

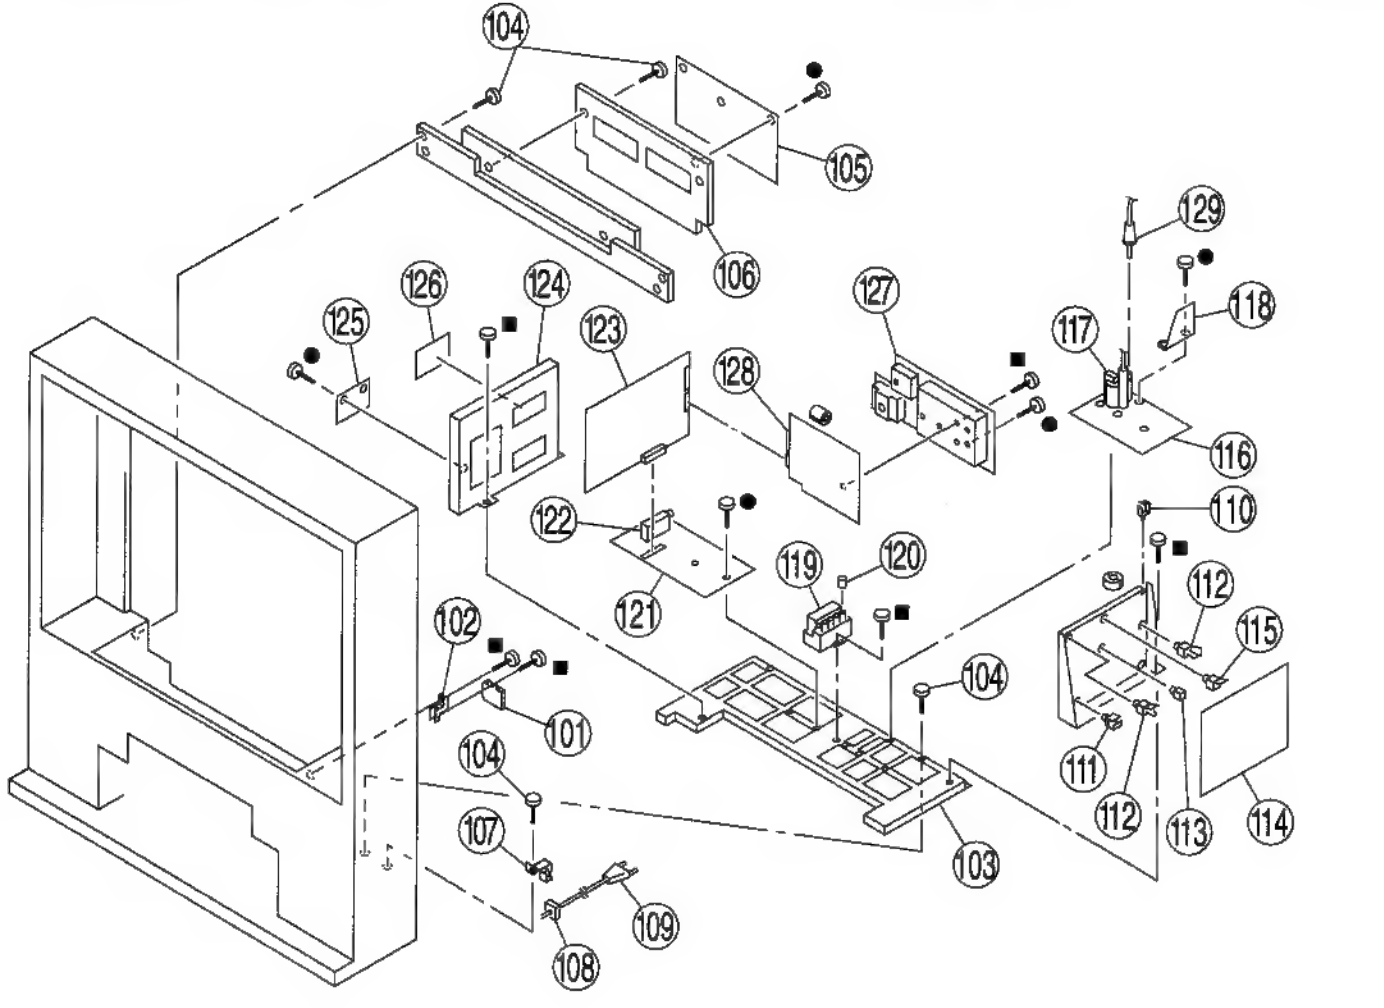

7-4. PICTURE TUBE

◇ : 7-685-663-71 +BVTP 4X16

The componants identified by shading and mark ⚠ are critical for safety.
Replace only with part number specified.
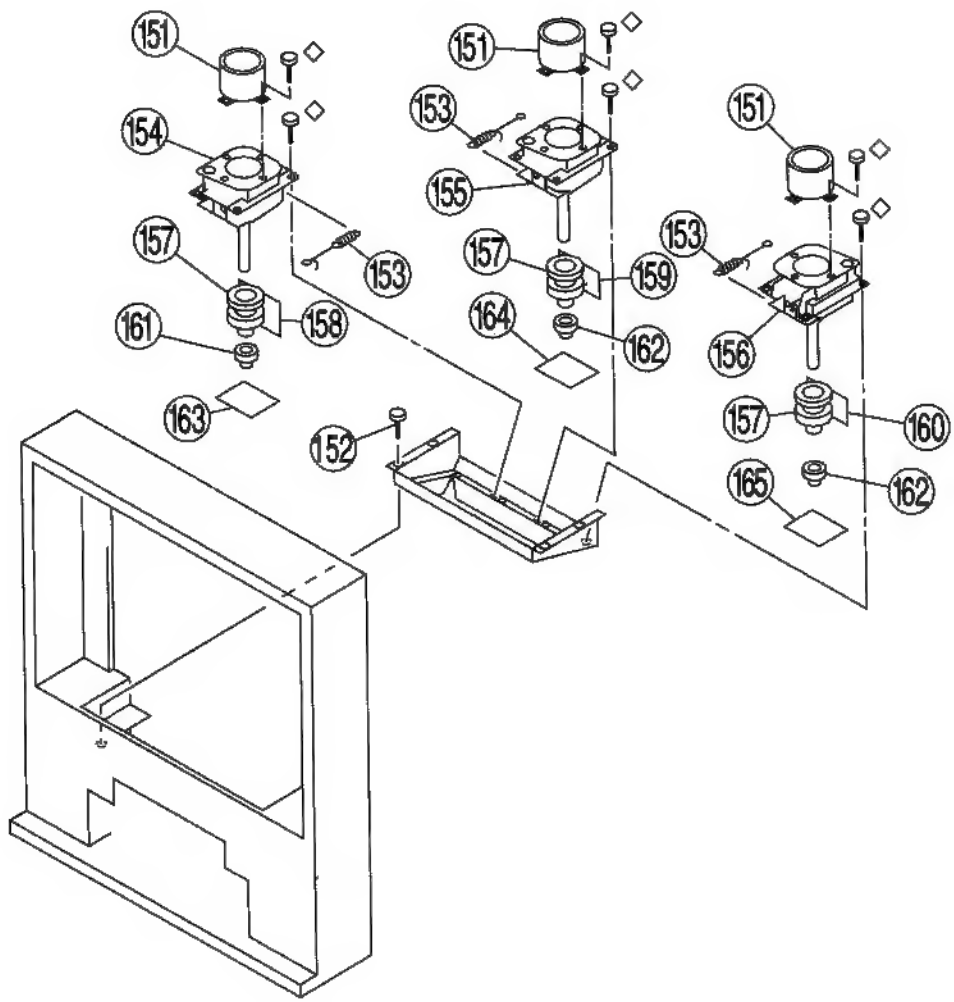
Les composants identifies par une trame et une marque ⚠ sont critiques pour la securite.
Ne les remplacer que par une piece portant le numero specifie.